



**BRENNAN** Industries®

The Logical Choice For Critical Flow Components®



***Double and  
Single-Ferrule  
Instrumentation  
Tube Fittings***

# **Interchangeability**


**Brennan Instrumentation Double-Ferrule**

**Tube Fittings are manufactured  
to be totally interchangeable and fully  
component intermixable with the  
Swagelok® and Parker A-LOK® tube  
fitting brands.**

**Brennan Double-Ferrule Compression**

**Tube Fittings are totally interchangeable  
with tube fittings of certain other  
manufacturers including Parker CPI™  
and HOKE Gyrolok®.**

# Introduction



**Brennan's Instrumentation Tube Fittings** provide leak-proof, torque-free seals at all tubing connections. They eliminate potentially hazardous and expensive leaks in instrumentation, process, pneumatic, hydraulic, gas and other tubing systems.

The basic Double-Ferrule Tube Fitting is a four-piece fitting consisting of the nut, back ferrule, front ferrule and the body. When installed, it becomes a five-piece connection with the addition of the tubing to provide a solid leak-free joint.

The two ferrules grasp tightly around the tube with no damage to the tube wall. Exhaustive tests have proved that the tubing will yield before a Brennan Double-Ferrule joint starts leaking.

The secret behind the success of the Brennan Double-Ferrule Tube Fitting lies in the two-ferrule design, which combines geometry and metallurgy. All action in the fitting is an axial movement along the tube instead of a rotary motion to create the joint. This axial movement prevents transmission of any torque from a fitting to the tubing. Since there is no initial strain in the tubing, the making of the joint does not weaken the tubing.

Another advantage of the Brennan Double-Ferrule Tube Fitting is that the swaging action of the twin ferrules overcomes variations in tubing wall thickness, hardness and dimensional tolerance.

Brennan's Double-Ferrule and Single-Ferrule Tube Fittings are easy to install and require no special tools. They are reusable several times and can withstand heavy impulse and vibration in both vacuum and pressure systems.

## **Brennan Instrumentation Tube Fitting Features:**

- Self-aligning
- Work on thick and thin wall tubing
- Resist vibration
- Work on a variety of tube materials
- All components are made of the same material for thermal compatibility and corrosion resistance
- Resist temperature cycling
- Compensate for the variables encountered in the tube and materials
- Do not significantly reduce flow area



## **Performance**

- Work in vacuums, as well as at low and high pressures
- Seal at low cryogenic temperatures, as well as elevated temperatures rated for the tube
- Seal consistently over a wide range of temperature cycling
- Seal repeatedly under both make and remake conditions
- Resist pressure beyond the tubing burst point




































## **Assembly**

- Use geometry rather than torque for uniformity of make-up. (To complete the joint, it requires only a 1-1/4 turn after snug-tightening.)
- Do not require disassembly and inspection of ferrule swaging at every make-up
- Do not require any special tools for assembly






## **Service**

Brennan's Tube Fittings are available in a wide range of materials, sizes, connections and configurations from our local distributors and supported by substantial inventories at our distribution centers.

## Product Gallery

Plug 	Nut 	Back Ferrule 	Front Ferrule 	Ferrule Set 	Male Connector (JIC) 
<b>N0304</b> <b>Pg. 12</b>	<b>N0318</b> <b>Pg. 12</b>	<b>N0319-B</b> <b>Pg. 12</b>	<b>N0319-F</b> <b>Pg. 13</b>	<b>N0319-S</b> <b>Pg. 13</b>	<b>N2402</b> <b>Pg. 13</b>
Union 	Reducing Union 	Male Connector 	Female Connector 	Reducer 	Cap 
<b>N2403</b> <b>Pg. 14</b>	<b>N2403</b> <b>Pg. 14</b>	<b>N2404</b> <b>Pg. 15</b>	<b>N2405</b> <b>Pg. 15-16</b>	<b>N2406</b> <b>Pg. 16</b>	<b>N2408</b> <b>Pg. 17</b>
Butt Weld Male Connector 	Socket Weld Male Connector 	Adapter 	Male Adapter 	O-Seal Male Adapter 	Female Adapter 
<b>N2425</b> <b>Pg. 17</b>	<b>N2426</b> <b>Pg. 18</b>	<b>N2427</b> <b>Pg. 18</b>	<b>N2428</b> <b>Pg. 18</b>	<b>N2429</b> <b>Pg. 19</b>	<b>N2430</b> <b>Pg. 19</b>
Female Gage Adapter 	Port Connector 	Reducing Port Connector 	Union Elbow 	Male Elbow 	Female Elbow 
<b>N2431</b> <b>Pg. 20</b>	<b>N2440</b> <b>Pg. 20</b>	<b>N2440</b> <b>Pg. 20</b>	<b>N2500</b> <b>Pg. 21</b>	<b>N2501</b> <b>Pg. 21</b>	<b>N2502</b> <b>Pg. 22</b>
45 Degree Male Elbow 	Butt Weld Male Elbow 	Socket Weld Male Elbow 	Male Branch Tee 	Female Branch Tee 	Union Tee 
<b>N2503</b> <b>Pg. 22</b>	<b>N2525</b> <b>Pg. 23</b>	<b>N2526</b> <b>Pg. 23</b>	<b>N2601</b> <b>Pg. 24</b>	<b>N2602</b> <b>Pg. 24</b>	<b>N2603</b> <b>Pg. 25</b>
Reducing Union Tee 	Male Run Tee 	Female Run Tee 	Cross 	Bulkhead Union 	Bulkhead Reducing Union 
<b>N2603</b> <b>Pg. 25-26</b>	<b>N2605</b> <b>Pg. 27</b>	<b>N2606</b> <b>Pg. 27</b>	<b>N2650</b> <b>Pg. 28</b>	<b>N2700-LN</b> <b>Pg. 28</b>	<b>N2700-LN</b> <b>Pg. 29</b>
Bulkhead Union Elbow 	Bulkhead Female Connector 	Bulkhead Male Connector 	Bulkhead Male Connector (JIC) 	Bulkhead Reducer 	O-Seal Male Connector 
<b>N2701-LN</b> <b>Pg. 29</b>	<b>N2705-LN</b> <b>Pg. 29</b>	<b>N2706-LN</b> <b>Pg. 30</b>	<b>N2707-LN</b> <b>Pg. 30</b>	<b>N2709-LN</b> <b>Pg. 31</b>	<b>N6400</b> <b>Pg. 31</b>

# Product Gallery

Positionable Male Elbow  N6801      Pg. 32	45 Degree Pos. Male Elbow  N6802      Pg. 32	Positionable Male Branch Tee  N6803      Pg. 33	Positionable Male Run Tee  N6804      Pg. 33	BSPT Male Connector  N7000      Pg. 34	BSPP Male Connector  N7002      Pg. 34
BSPP Positionable Male Elbow  N7202      Pg. 35					

## Contents

<b>■ Interchangeability .....</b>	<b>2</b>	<b>■ Pre-Setting .....</b>	<b>9</b>
<b>■ Brennan Instrumentation</b>		<b>■ Brennan Gap</b>	
<b>Tube Fittings.....</b>	<b>3</b>	<b>Inspections Gages .....</b>	<b>10</b>
<b>■ Product Gallery.....</b>	<b>4-5</b>	<b>■ Fitting Type Designators ...</b>	<b>10</b>
<b>■ Tubing Selection.....</b>	<b>6</b>	<b>■ Ordering Codes.....</b>	<b>11</b>
- Tubing Hardness		<b>■ Sizing Chart .....</b>	<b>11</b>
- Tubing Wall Thickness		<b>■ Double-Ferrule Tube</b>	
- Tubing For Gas Service		<b>Fittings .....</b>	<b>12-35</b>
- Tubing Handling		<b>■ Single-Ferrule Fittings .....</b>	<b>36</b>
<b>■ Tubing Specifications .....</b>	<b>7</b>	<b>■ Instrumentation Valves ....</b>	<b>37</b>
<b>■ Tubing-Working Pressure</b>		<b>■ Cross Reference</b>	
<b>Tables .....</b>	<b>7-8</b>	<b>Chart.....</b>	<b>38-47</b>
<b>■ Thread Specifications.....</b>	<b>8</b>		
<b>■ Assembly.....</b>	<b>9</b>		

## Tubing Selection

Proper selection, handling and installation of tubing are essential for reliable tubing system performance. While Brennan Industries is not a tubing manufacturer or supplier, we must stress the importance of carefully selecting high-quality tubing. Proper tubing selection is necessary to ensure safe and leak-free systems. Brennan Industries is happy to assist in tubing selection upon request.

Tubing selection is based on the material, hardness, wall thickness and surface finish. The ASTM specifications for various tubes cover material, hardness and wall thickness. They do not give details on the surface finish.

### Tubing Hardness

Tubing must always be softer than the fitting material. To achieve leak-free connections, it is important to use the recommended tubing hardness as explained in the Tubing Specifications section, leak-free connections will be achieved.

The biggest misunderstanding about tubing hardness is in the area of stainless steel tubing. Brennan's Stainless Steel Instrumentation Tube Fittings have been successfully lab tested with tubing hardness up to RB 90, the maximum hardness allowable under ASTM A 213 and A 269.

However, Brennan's Instrumentation Tube Fittings will perform optimally and provide the maximum advantage and performance for tubes with hardnesses below RB 80. It is suggested that, when purchasing stainless steel tubing to ASTM A 213/A 269, you specify that the hardness of the tubing should not exceed RB 80.

The best results are obtained where the stainless steel tubing hardness is in the range RB 75-80. Such tubing lowers installation costs because it is more easily bent and installed.

Tubing installers should perform the full 1-1/4 turn after snug-tightening to ensure proper joints. This will provide the best performance and is especially true in the case of harder tubing where higher torque is required.

### Tubing Wall Thickness

The allowable pressure rating of tubing for the wide range of wall thickness is calculated from "S" values as specified by ANSI Code B 31.1.

The range of tubing wall thicknesses varies from 0.028" to 0.109" in the inch OD series. These wall thicknesses are generally preferred for tube sizes up to 1". For higher tube sizes, these wall thicknesses may be increased to 0.125 and 0.167".

### Tubing For Gas Service

For maximum safety and the prevention of surface defects in any gas system, it is recommended that tubing wall thicknesses are not less than those shown in this table:

Tube O.D.	1/16"	1/8"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	7/8"	1"	1-1/4"	1-1/2"	2"
<b>Suggested Minimum Wall Thickness</b>	.028"	.028"	.028"	.035	.035	.041	.052	.062	.073	.083	.104	.125	.167

Light gases such as helium, hydrogen, nitrogen, etc. have very small molecules, which can escape through even the smallest leak path created by surface defects on the tubing. As the tube OD increases, so does the likelihood of a scratch or other surface defect interfering with proper sealing.

For the most successful connection for gas service, all installation instructions should be followed carefully and the heavier permissible wall thickness of tubing should be selected. A heavy wall thickness resists ferrule action more than a thin wall thickness. This allows the ferrules to coin out minor surface imperfections. A thin wall tube will collapse, offering little resistance to ferrule action during assembly. This reduces the chance of coining out surface defects, which is essential for gas service.

### Tubing Handling

Scratches on tube OD are a potential source of problems in leak-tight tubing systems. Good handling practices can greatly reduce scratches and protect tubing surface finishes.

Tubing should never be dragged out of a tubing rack. Particularly in sizes 3/4" and larger, the weight of the tubing being retrieved is sufficient to gouge the OD if there are any burrs on the ends of the other tubes in the rack.

Tubing should never be dragged across cement, asphalt, gravel or any other surface, which could scratch the surface and create potential leak paths.

Sharp tube cutters should be maintained and tube ends should always be deburred. This allows easier entrance of the tube into the fitting bore and helps to assure that the tubing will go all the way through the ferrules without damaging the ferrule's sealing edge.

# General Technical

## Tubing Specifications

### Carbon Steel Tubing

Seamless, soft annealed carbon steel tubing to ASTM A 179, Din 2391 or equivalent. 4-1 safety factor considering tensile strength of 47,000 psi at room temperature. For higher temperature service, apply the reducing factors for elevated temperature operation as specified in Table 302.3 1A and 304.1.2 of the code for pressure piping in ANSI B31.3.

Recommended tube hardness is RB 72 or less.

The tubing should be suitable for bending and flaring and free of all surface defects and imperfections.

### Stainless Steel Tubing

Seamless, annealed 304 or 316 Stainless Steel tubing to ASTM A 269 or A 213 or equivalent is recommended (ERW tubing use is not recommended). 4-1 safety factor considering tensile strength of 75,000 psi at room temperature.

Tube hardness should not exceed RB 80. The preferable hardness range is RB 75-80.

Tubing should be suitable for bending and flaring, and should be free of any surface defects and imperfections. A derating factor must be used for drawn and welded tubing.

### Copper Tubing

Annealed, soft, seamless copper tubing to ASTM B 75 or equivalent. 5-1 safety factor considering tensile strength of 30,000 psi at room temperature. Maximum hardness of the tubing is not to exceed RB 50. Preferred hardness range is RB 40-45.

## Tubing-Working Pressure Tables

### Maximum Allowable Working Pressure Tables

Table #1: Stainless Steel Tubing  
Wall Thickness of Tube (inches)

TUBE OD (In)	0.01	0.012	0.016	0.02	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120	0.134	0.156
1/16	5,587	6,861	9,593	12,185										
1/8					8,565	10,829								
3/16					5,474	7,039	10,116							
1/4					4,020	5,132	7,500	10,135						
5/16						4,037	5,848	8,071						
3/8						3,326	4,791	6,566						
1/2						2,611	3,741	5,092	6,696					
5/8							2,951	3,998	5,225	6,075				
3/4							2,436	3,289	4,283	4,966	5,785			
7/8							2,073	2,793	3,628	4,199	4,881			
1							1,804	2,427	3,146	3,637	4,220	4,688		
1 1/4									2,485	2,867	3,321	3,682	4,149	4,900
1 1/2									2,046	2,358	2,726	3,020	3,398	4,003

The Allowable working pressures for 304 SS or 316 SS seamless tubing to **ASTM A269-04 or equivalent** based on the following data: Temperature: -20°F to 100°F; Ultimate Tensile Strength: 75,000 psi; Allowable stress: 20,000 psi as specified by **ASME B31.3-2002**.

Table #2: Copper Tubing  
Wall Thickness of Tube (inches)

TUBE OD (In)	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120	0.134	0.148	0.165	0.18	0.22	
1/8	2,789	3,772												
3/16	1,795	2,328	3,600											
1/4	1,306	1,681	2,550	3,624										
5/16		1,314	1,973	2,767										
3/8		1,078	1,608	2,237										
1/2		791	1,172	1,615	2,145									
5/8			920	1,262	1,667	1,956								
3/4			748	1,025	1,342	1,572	1,850							
7/8			634	868	1,133	1,326	1,556							
1			550	752	981	1,146	1,343	1,486						
1 1/4					771	900	1,052	1,163	1,320	1,481	1,656	1,836	2,308	
1 1/2					635	740	878	954	1,082	1,212	1,353	1,497	1,873	

The Allowable working pressures for copper seamless tubing to **ASTM B75-02, ASTM B251 or equivalent** based on the following data: Temperature: -20°F to 100°F; Ultimate Tensile Strength: 30,000 psi; Allowable stress: 6,000 psi as specified by **ASME B31.3-2002**.

**Tubing-Working Pressure Tables...Continued**
**Table #3: Carbon Steel Tubing**  
 Wall Thickness of Tube (inches)

TUBE OD (In)	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120	0.134	0.148	0.165	0.180	0.22
1/8	6,782	8,865											
3/16	4,319	5,556	8,253										
1/4	3,166	4,043	5,912	8,254									
5/16		3,177	4,604	6,356									
3/8		2,615	3,769	5,167									
1/2		2,051	2,940	4,003	5,265								
5/8		1,623	2,318	3,140	4,106	4,774							
3/4			1,912	2,583	3,364	3,901	4,545						
7/8			1,627	2,193	2,848	3,297	3,833						
1		1,415	1,904	2,469	2,855	3,314	3,681						
1 1/4			1,504	1,946	2,246	2,601	2,885	3,251	3,624	4,086	4,501	5,650	
1 1/2				1,607	1,853	2,143	2,374	2,672	2,974	3,347	3,681	4,599	

The Allowable working pressures for carbon steel seamless tubing to **ASTM A 822-90 or equivalent** based on the following data: Temperature: -20°F to 100°F; Ultimate Tensile Strength: 47,000 psi; Allowable stress: 15,700 psi as specified by **ASME B31.3-2002**.

**Table #4: Monel Tubing**

TUBE OD (In)	0.028	0.035	0.049	0.065	0.083	0.095	0.109	0.120
1/8	8,007	10,462						
1/4	3,758	4,798	7,012	9,788				
3/8		3,109	4,479	6,139				
1/2		2,298	3,288	4,470	5,867			
5/8			2,269	3,064	3,989	4,625	5,389	
1			1,682	2,263	2,933	3,390	3,934	4,370

The Allowable working pressures for Monel Alloy 400 seamless tubing for **ASTM B165-05 or equivalent** based on the following data: Temperature: -20°F to 100°F; Ultimate Tensile Strength: 70,000 psi; Allowable stress: 18,700 psi as specified by **ASME B31.3-2002**.

**Table #5: Stress Factor for Elevated Temperatures**



TEMP (°F)	Stainless Steel ASTM A-269 304	Copper ASTM B-75 316	Carbon Steel ASTM A-179 B-165	Monel ASTM B-165
100	1.00	1.00	1.00	1.00
200	1.00	1.00	0.80	0.96
300	1.00	1.00	0.78	0.90
400	0.94	0.97	0.50	0.86
500	0.88	0.85		0.82
600	0.82	0.85		0.77
700	0.80	0.82		0.73
800	0.76	0.80		0.59
900	0.73	0.78		0.41
1000	0.69	0.77		0.16

To find the maximum allowable working pressure for various tubing materials at elevated temperatures, multiply the maximum allowable working pressure for the tube size and wall thickness found in Tables 1, 2 and 3 by the correct stress factor found in this Table.

## Thread Specifications

Brennan's connectors have one or more tubing end connections and there are a variety of pipe threads for which Brennan's Tube Fittings are available. Two of the most popular thread connections are the American National Pipe Thread (NPT) and the British Standard Pipe Threads (BSP). These threads meet the standards of individual countries as well as the codified ISO standards. All Brennan fittings with pipe threads or stud end threads conform to the specifications below:

- American National Pipe Thread (NPT): Reference specification ASA B2.1; 1960
- ISO Parallel Pipe Thread (British Standard Pipe Thread): Reference specifications BS 2779, ISO 228/1, DIN 259, JISB 0202, IS 2643
- ISO Taper Pipe Thread (British Standard Pipe Taper Thread): Reference specifications BS 21, ISO 7/1, DIN 2999, JIS B0203, IS 554
- Unified National Pipe Threads: Reference specifications ASA B1.1; 1964

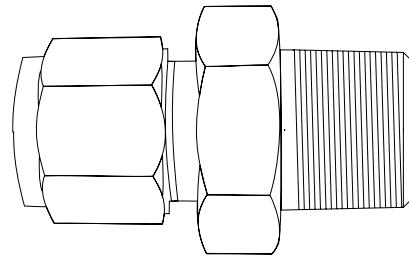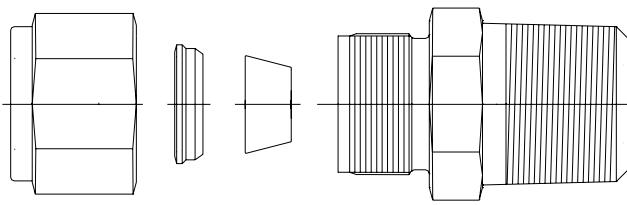

# General Technical

## Assembly

Brennan single- and double-ferrule instrumentation tube fittings are sold fully assembled, finger-tightened and ready for immediate use. Disassembly before use can result in dirt or foreign material getting into the fitting, which can cause leaks. Brennan Tube Fittings are installed in three easy steps:

### Step 1

Insert the tubing into the Brennan Tube Fitting. Make sure that the tubing rests firmly on the shoulders of the fitting and that the nut is snug-tight. In this position, the tube does not rotate by hand.



### Step 2

Before tightening the Brennan nut, scribe the nut at the 9 o'clock position.



### Step 3

While holding the fitting body steady with a backup wrench, tighten the nut 1-1/4 turns\*.

Watch the scribe mark and make one complete revolution. Then continue turning to the 12 o'clock position.

\* For 1/16", 1/8" and 3/16" size tube fittings, only 3/4 turns from finger-tight is required.



### Reassembly Instructions

Insert tube into fitting body and hand tighten. Using wrench, rotate the nut approximately 1/4 turn to original 1-1/4 turns position. Then snug slightly with wrench.

## Pre-Setting

Sometimes, Brennan Tube Fittings must be installed in cramped quarters or overhead. For these applications, it is advantageous to use a preset tool on the tubing in an open ground level area, thus pre-swaging the ferrules onto the tubing. The tubing is then removed from the pre-setting tool. The tubing (with nut and pre-swaged ferrules) can now be attached to the fitting merely by following the reassembly instructions.

### Step 1

Assemble the Brennan nut and ferrules to the pre-swaging tool. Insert the tubing until it bottoms out in the fitting body. Then tighten the nut 1-1/4 turns.

### Step 2

Loosen the nut and remove the tubing with the pre-swaged ferrules from the pre-setting tool.

### Step 3

The connection can now be made simply by snug-tightening the nut as described in Brennan's easy to follow retightening instructions.

Brennan's pre-set tools (series NPST) for all common fractional instrumentation tube fitting sizes are available from stock.

### Pre-Set Tool Usage - Recommendations

Brennan recommends using manual pre-set tools for  $\frac{1}{2}$ " and smaller size tubing and fittings when installations involve a large quantity of fittings or are in hard-to-reach areas.

For 5/8" and larger tubing sizes, Brennan suggests using a pre-set tool (hydraulic or manual) in all applications in recognition of the heavy wall tubing's intrinsic strength. For these larger tubing size jobs using tubing with a wall thickness of less than 0.065", only a manual Brennan pre-set tool is required. In applications where the tubing wall thickness is 0.065" and above hydraulically pre-setting of the ferrules onto the tubing is specifically recommended.

## Brennan Gap Inspection Gages

Brennan's carbon steel Gap Inspection Gages are designed to assure that an instrumentation tube fitting has been sufficiently pulled up.

These gages are particularly useful when fittings are to be tightened in difficult or inaccessible locations. They are also designed for use in systems where insufficient make-up could cause potentially dangerous or expensive consequences.

The Gap Inspection Gages are not intended for use in subsequent remake assemblies, Brennan's gages have both "Go" and "No Go" ends. They should be used only in initial make-up situations.

The NGG Series gages are available from stock in 1/2" and above sizes.

**NOTE:**  
Brennan has a dynamic Research & Development program for the development of fittings in different materials, higher pressures and temperatures. The dimensions and information given in this catalog are subject to change without notice as a result of this research and development.

## Fitting Type Designators

Designator	Description	Designator	Description
N0304	Plug	N2525	Butt Weld Male Elbow
N0318	Nut	N2526	Socket Weld Male Elbow
N0319-B	Back Ferrule	N2601	Male Branch Tee
N0319-F	Front Ferrule	N2602	Female Branch Tee
N0319-S	Ferrule Set	N2603	Union Tee
N2402	Male Connector (JIC)	N2603	Reducing Union Tee
N2403	Union	N2605	Male Run Tee
N2403	Reducing Union	N2606	Female Run Tee
N2404	Male Connector	N2650	Cross
N2405	Female Connector	N2700-LN	Bulkhead Union
N2406	Reducer	N2700-LN	Bulkhead Reducing Union
N2408	Cap	N2701-LN	Bulkhead Union Elbow
N2425	Butt Weld Male Connector	N2705-LN	Bulkhead Female Connector
N2426	Socket Weld Male Connector	N2706-LN	Bulkhead Male Connector (NPT)
N2427	Male Adapter (JIC)	N2707-LN	Bulkhead Male Connector (JIC)
N2428	Male Adapter (NPT)	N2709-LN	Bulkhead Reducer
N2429	O-Seal Male Adapter	N6400	O-Seal Male Connector
N2430	Female Adapter	N6801	90° Positionable Male Elbow
N2431	Female Gage Adapter	N6802	45° Degree Positionable Male Elbow
N2440	Port Connector	N6803	90° Positionable Male Branch Tee
N2440	Reducing Port Connector	N6804	Positionable Male Run Tee
N2500	Union Elbow	N7000	BSPT Male Connector
N2501	Male Elbow	N7002	BSPP Male Connector
N2502	Female Elbow	N7202	BSPP Positionable Male Elbow
N2503	45 Degree Male Elbow		

- Additional Fitting Types Are Available Upon Request.

# General Technical

## Ordering Codes

Example →

**N2404-04-04-SS**

Fitting Type (Male Connector)	Tube O.D. in sixteenths of an inch 1/4" O.D.	Pipe Size in sixteenths of an inch 1/4" NPT	Material SS = stainless steel, type 316 B = brass
----------------------------------	---	--	---

- The largest tube end size is first. The smaller tube end or pipe thread size follows.
- Additional fitting materials and thread specifications are available upon request.

NOTE: No suffix is required for Carbon Steel fittings.

## Sizing Chart


Tube-To-Pipe or  
Tube-To-Tube

Size No.	Tube O.D.	Pipe Thread or Tube O.D.
1-1	1/16	1/16
1-2	1/16	1/8
2-1	1/8	1/16
2-2	1/8	1/8
2-4	1/8	1/4
3-2	3/16	1/8
3-4	3/16	1/4
4-2	1/4	1/8
4-4	1/4	1/4
4-6	1/4	3/8
4-8	1/4	1/2
5-2	5/16	1/8
5-4	5/16	1/4
6-2	3/8	1/8
6-4	3/8	1/4
6-6	3/8	3/8
6-8	3/8	1/2
8-4	1/2	1/4
8-6	1/2	3/8
8-8	1/2	1/2
8-12	1/2	3/4
10-6	5/8	3/8
10-8	5/8	1/2
10-12	5/8	3/4
12-8	3/4	1/2
12-12	3/4	3/4
14-12	7/8	3/4
14-16	7/8	1
16-12	1	3/4
16-16	1	1
20-20	1-1/4	1-1/4
24-24	1-1/2	1-1/2
32-32	2	2

- Additional sizes are available upon request.

## Plug N0304

Part No.	T Tube OD	G A/F
N0304-01	1/16	0.31
N0304-02	1/8	0.43
N0304-04	1/4	0.56
N0304-05	5/16	0.63
N0304-06	3/8	0.69
N0304-08	1/2	0.87
N0304-10	5/8	1.00
N0304-12	3/4	1.12
N0304-14	7/8	1.26
N0304-16	1	1.50
N0304-20	1-1/4	1.87
N0304-24	1-1/2	2.24
N0304-32	2	3.00

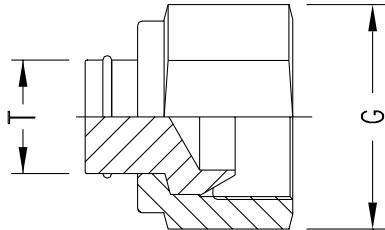


### Special Installation Instructions For Adapters And Plugs

From finger-tight, tighten nut 1/4 turn only. Further connections are made by wrench tightening slightly after snugging nut by hand.


## Nut N0318

Part No.	T Tube OD	L	G
N0318-01	1/16	0.33	0.31
N0318-02	1/8	0.47	0.43
N0318-04	1/4	0.50	0.56
N0318-05	5/16	0.53	0.63
N0318-06	3/8	0.59	0.67
N0318-08	1/2	0.69	0.87
N0318-10	5/8	0.69	0.98
N0318-12	3/4	0.71	1.12
N0318-14	7/8	0.69	1.26
N0318-16	1	0.85	1.50
N0318-20	1-1/4	1.25	1.97
N0318-24	1-1/2	1.5	2.24
N0318-32	2	2.07	2.99



## Back Ferrule N0319-B


Part No.	T Tube OD
N0319-B-01	1/16
N0319-B-02	1/8
N0319-B-04	1/4
N0319-B-05	5/16
N0319-B-06	3/8
N0319-B-08	1/2
N0319-B-10	5/8
N0319-B-12	3/4
N0319-B-14	7/8
N0319-B-16	1
N0319-B-20	1-1/4
N0319-B-24	1-1/2
N0319-B-32	2



# Double-Ferrule Tube Fittings


## Front Ferrule N0319-F

Part No.	T Tube OD
N0319-F-01	1/16
N0319-F-02	1/8
N0319-F-04	1/4
N0319-F-05	5/16
N0319-F-06	3/8
N0319-F-08	1/2
N0319-F-10	5/8
N0319-F-12	3/4
N0319-F-14	7/8
N0319-F-16	1
N0319-F-20	1-1/4
N0319-F-24	1-1/2
N0319-F-32	2




## Ferrule Set N0319-S

Part No.	T Tube OD
N0319-S-01	1/16
N0319-S-02	1/8
N0319-S-04	1/4
N0319-S-05	5/16
N0319-S-06	3/8
N0319-S-08	1/2
N0319-S-10	5/8
N0319-S-12	3/4
N0319-S-14	7/8
N0319-S-16	1
N0319-S-20	1-1/4
N0319-S-24	1-1/2
N0319-S-32	2

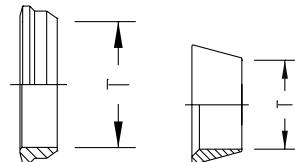

## Male Connector (JIC) N2402

Tube X Male JIC

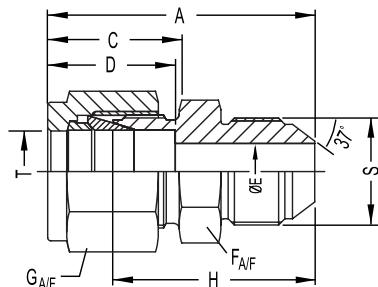

Part No.	T Tube OD	S SAE/MS MALE	A	C	D	E min.	F A/F	G A/F	H
N2402-01-02	1/16	1/8	1.07	0.43	0.34	0.05	0.43	0.31	0.92
N2402-02-02	1/8	1/8	1.27	0.60	0.50	0.06	0.43	0.44	1.01
N2402-02-04	1/8	1/4	1.38	0.60	0.50	0.09	0.50	0.44	1.12
N2402-04-04	1/4	1/4	1.48	0.70	0.60	0.17	0.50	0.56	1.19
N2402-05-05	5/16	5/16	1.51	0.73	0.64	0.23	0.56	0.62	1.22
N2402-06-04	3/8	1/4	1.56	0.76	0.66	0.17	0.62	0.69	1.27
N2402-06-06	3/8	3/8	1.56	0.76	0.66	0.28	0.62	0.69	1.27
N2402-08-08	1/2	1/2	1.81	0.86	0.90	0.39	0.81	0.87	1.41
N2402-12-12	3/4	3/4	2.10	0.86	0.96	0.61	1.12	1.12	1.70
N2402-16-16	1	1	2.42	1.04	1.23	0.84	1.37	1.50	1.94


B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

## Union N2403

### Tube x Tube


Part No.	T Tube OD	A	C	D	E min.	F A/F	G A/F	H
N2403-01-01	1/16	0.99	0.43	0.34	0.05	0.31	0.31	0.69
N2403-02-02	1/8	1.40	0.60	0.50	0.09	0.43	0.43	0.88
N2403-04-04	1/4	1.61	0.70	0.60	0.19	0.56	0.56	1.03
N2403-05-05	5/16	1.69	0.73	0.64	0.25	0.56	0.63	1.11
N2403-06-06	3/8	1.77	0.76	0.66	0.28	0.63	0.67	1.19
N2403-08-08	1/2	2.02	0.86	0.90	0.41	0.81	0.87	1.22
N2403-10-10	5/8	2.05	0.86	0.96	0.50	0.94	0.98	1.25
N2403-12-12	3/4	2.11	0.86	0.96	0.62	1.06	1.12	1.31
N2403-14-14	7/8	2.17	0.86	1.02	0.72	1.19	1.26	1.37
N2403-16-16	1	2.55	1.04	1.23	0.88	1.42	1.50	1.59
N2403-20-20	1-1/4	3.63	1.53	1.62	1.09	1.75	1.97	1.89
N2403-24-24	1-1/2	4.25	1.78	1.97	1.34	2.16	2.24	2.11
N2403-32-32	2	5.88	2.47	2.66	1.81	2.75	3.00	2.94

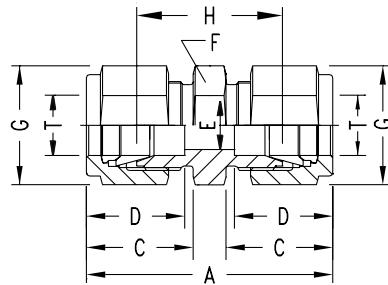

## Reducing Union N2403

### Tube x Tube


Part No.	T Tube OD	Tx Tube OD	A	C	Cx	D	Dx	E	F	G	Gx	H
N2403-04-02	1/4	1/8	1.52	0.70	0.60	0.60	0.50	0.09	0.56	0.56	0.44	0.97
N2403-05-02	5/16	1/8	1.56	0.73	0.60	0.64	0.50	0.09	0.56	0.63	0.44	1.01
N2403-05-04	5/16	1/4	1.66	0.73	0.70	0.64	0.60	0.19	0.56	0.63	0.56	1.08
N2403-06-02	3/8	1/8	1.61	0.76	0.60	0.66	0.50	0.09	0.63	0.69	0.44	1.06
N2403-06-04	3/8	1/4	1.70	0.76	0.70	0.66	0.60	0.19	0.63	0.69	0.56	1.12
N2403-08-02	1/2	1/8	1.78	0.86	0.60	0.90	0.50	0.09	0.81	0.87	0.44	1.12
N2403-08-04	1/2	1/4	1.85	0.86	0.70	0.90	0.60	0.19	0.81	0.87	0.56	1.16
N2403-08-06	1/2	3/8	1.91	0.86	0.76	0.90	0.66	0.28	0.81	0.87	0.69	1.22
N2403-10-06	5/8	3/8	1.94	0.86	0.76	0.96	0.66	0.28	0.94	1.00	0.69	1.25
N2403-10-08	5/8	1/2	2.05	0.86	0.86	0.96	0.90	0.41	0.94	1.00	0.87	1.25
N2403-12-04	3/4	1/4	1.94	0.86	0.70	0.96	0.60	0.19	1.06	1.12	0.56	1.25
N2403-12-06	3/4	3/8	2.00	0.86	0.76	0.96	0.66	0.28	1.06	1.12	0.69	1.31
N2403-12-08	3/4	1/2	2.11	0.86	0.86	0.96	0.90	0.41	1.06	1.12	0.87	1.31
N2403-16-08	1	1/2	2.38	1.04	0.86	1.23	0.90	0.41	1.42	1.50	0.87	1.50
N2403-16-12	1	3/4	2.38	1.04	0.86	1.23	0.96	0.62	1.42	1.50	1.12	1.50
N2403-20-16	1-1/4	1	3.63	1.53	1.04	1.62	1.23	0.88	1.81	1.97	1.50	1.89
N2403-24-20	1-1/2	1-1/4	2.38	1.78	1.53	1.97	1.62	1.08	2.17	2.24	1.97	2.11

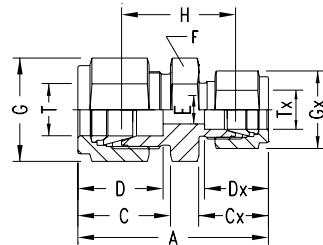

# Double-Ferrule Tube Fittings

## Male Connector N2404

Tube x Male NPT Threads

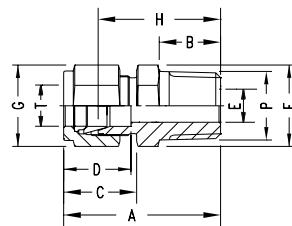


Part No.	T Tube OD	P NPT Male	A	B	C	D	E min.	F A/F	G A/F	H
N2404-01-01	1/16	1/16	0.94	0.38	0.43	0.34	0.05	0.31	0.31	0.79
N2404-01-02	1/16	1/8	1.03	0.38	0.43	0.34	0.05	0.43	0.31	0.88
N2404-02-02	1/8	1/8	1.20	0.38	0.60	0.50	0.09	0.43	0.43	0.94
N2404-02-04	1/8	1/4	1.40	0.56	0.60	0.50	0.09	0.56	0.43	1.14
N2404-04-02	1/4	1/8	1.29	0.38	0.70	0.60	0.19	0.56	0.56	1.00
N2404-04-04	1/4	1/4	1.49	0.56	0.70	0.60	0.19	0.56	0.56	1.20
N2404-04-06	1/4	3/8	1.51	0.56	0.70	0.60	0.19	0.75	0.56	1.22
N2404-04-08	1/4	1/2	1.76	0.75	0.70	0.60	0.19	0.87	0.56	1.47
N2404-05-04	5/16	1/4	1.52	0.56	0.73	0.64	0.25	0.56	0.63	1.23
N2404-06-02	3/8	1/8	1.39	0.38	0.76	0.66	0.19	0.63	0.67	1.10
N2404-06-04	3/8	1/4	1.57	0.56	0.76	0.66	0.28	0.63	0.67	1.28
N2404-06-06	3/8	3/8	1.57	0.56	0.76	0.66	0.28	0.75	0.67	1.28
N2404-06-08	3/8	1/2	1.82	0.75	0.76	0.66	0.28	0.87	0.67	1.53
N2404-08-04	1/2	1/4	1.71	0.56	0.86	0.90	0.28	0.81	0.87	1.31
N2404-08-06	1/2	3/8	1.71	0.56	0.86	0.90	0.38	0.81	0.87	1.31
N2404-08-08	1/2	1/2	1.93	0.75	0.86	0.90	0.41	0.87	0.87	1.53
N2404-08-12	1/2	3/4	1.99	0.75	0.86	0.90	0.41	1.06	0.87	1.59
N2404-08-16	1/2	1	2.25	0.94	0.86	0.90	0.41	1.42	0.87	1.85
N2404-10-06	5/8	3/8	1.74	0.56	0.86	0.96	0.38	0.94	0.98	1.34
N2404-10-08	5/8	1/2	1.93	0.75	0.86	0.96	0.47	0.94	0.98	1.53
N2404-12-08	3/4	1/2	1.99	0.75	0.86	0.96	0.47	1.06	1.12	1.59
N2404-12-12	3/4	3/4	1.99	0.75	0.86	0.96	0.62	1.06	1.12	1.59
N2404-12-16	3/4	1	2.25	0.94	0.86	0.96	0.62	1.42	1.12	1.85
N2404-14-12	7/8	3/4	1.99	0.75	0.86	1.02	0.62	1.18	1.26	1.59
N2404-16-08	1	1/2	2.26	0.75	1.04	1.23	0.47	1.42	1.50	1.78
N2404-16-12	1	3/4	2.26	0.75	1.04	1.23	0.62	1.42	1.50	1.78
N2404-16-16	1	1	2.45	0.94	1.04	1.23	0.88	1.42	1.50	1.97
N2404-20-16	1-1/4	1	3.04	0.94	1.53	1.62	0.88	1.81	1.97	2.17
N2404-20-20	1-1/4	1-1/4	3.04	0.94	1.53	1.62	1.09	1.81	1.97	2.17
N2404-24-24	1-1/2	1-1/2	3.50	1.03	1.78	1.97	1.34	2.17	2.24	2.43
N2404-32-32	2	2	4.47	1.06	2.47	2.66	1.81	2.76	3.0	3.00

Bored-Through Connectors available in all of these sizes. Add suffix "BT" to the above part numbers to designate bored-through male connector.

## Female Connector N2405

Tube x Female NPT Threads

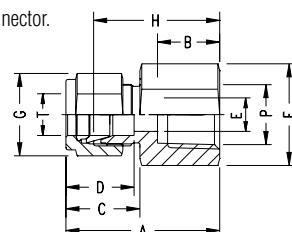

Part No.	T Tube OD	P NPT Female	A	B	C	D	E min.	F A/F	G A/F	H
N2405-01-01	1/16	1/16	0.93	0.38	0.43	0.34	0.05	0.43	0.31	0.78
N2405-01-02	1/16	1/8	0.96	0.41	0.43	0.34	0.05	0.56	0.31	0.81
N2405-02-02	1/8	1/8	1.13	0.41	0.60	0.50	0.09	0.56	0.43	0.87
N2405-02-04	1/8	1/4	1.32	0.59	0.60	0.50	0.09	0.75	0.43	1.06
N2405-04-02	1/4	1/8	1.23	0.41	0.70	0.60	0.19	0.56	0.56	0.94
N2405-04-04	1/4	1/4	1.41	0.59	0.70	0.60	0.19	0.75	0.56	1.12
N2405-04-06	1/4	3/8	1.48	0.59	0.70	0.60	0.19	0.87	0.56	1.19
N2405-04-08	1/4	1/2	1.67	0.78	0.70	0.60	0.19	1.06	0.56	1.38
N2405-05-02	5/16	1/8	1.26	0.41	0.73	0.64	0.25	0.56	0.63	0.97
N2405-05-04	5/16	1/4	1.45	0.59	0.73	0.64	0.25	0.75	0.63	1.16
N2405-06-02	3/8	1/8	1.29	0.41	0.76	0.66	0.28	0.63	0.67	1.00
N2405-06-04	3/8	1/4	1.48	0.59	0.76	0.66	0.28	0.75	0.67	1.19
N2405-06-06	3/8	3/8	1.54	0.59	0.76	0.66	0.28	0.87	0.67	1.25
N2405-06-08	3/8	1/2	1.73	0.78	0.76	0.66	0.28	1.06	0.67	1.44
N2405-08-04	1/2	1/4	1.59	0.59	0.86	0.90	0.41	0.81	0.87	1.19

continued on next page


B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

# Female Connector

## N2405 *Continued*


### Tube x Female NPT Threads

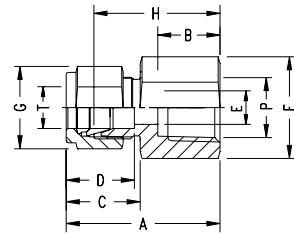

Part No.	T Tube OD	P NPT Female	A	B	C	D	E min.	F A/F	G A/F	H
N2405-08-06	1/2	3/8	1.65	0.59	0.86	0.90	0.41	0.87	0.87	1.25
N2405-08-08	1/2	1/2	1.84	0.78	0.86	0.90	0.41	1.06	0.87	1.44
N2405-08-12	1/2	3/4	1.90	0.81	0.86	0.90	0.41	1.26	0.87	1.50
N2405-10-06	5/8	3/8	1.65	0.59	0.86	0.96	0.50	0.94	0.98	1.25
N2405-10-08	5/8	1/2	1.84	0.78	0.86	0.96	0.50	1.06	0.98	1.44
N2405-12-08	3/4	1/2	1.84	0.78	0.86	0.96	0.62	1.06	1.12	1.44
N2405-12-12	3/4	3/4	1.90	0.81	0.86	0.96	0.62	1.42	1.12	1.50
N2405-14-12	7/8	3/4	1.96	0.81	0.86	1.02	0.72	1.42	1.26	1.56
N2405-16-12	1	3/4	2.10	0.81	1.04	1.23	0.88	1.42	1.50	1.62
N2405-16-12	1	1	2.45	1.00	1.04	1.23	0.88	1.61	1.50	1.97
N2405-20-20	1-1/4	1-1/4	2.94	1.00	1.53	1.62	1.09	2.17	1.97	2.07
N2405-24-24	1-1/2	1-1/2	3.28	1.09	1.78	1.97	1.34	2.36	2.24	2.21

# Reducer N2406


### Tube x Machined Tube Stub

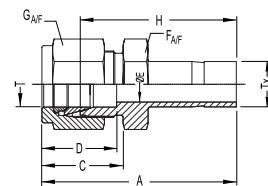

Part No.	T Tube OD	Tx Tube OD	A	C	D	E min.	F A/F	G A/F	H
N2406-02-02	1/8	1/8	1.32	0.60	0.50	0.08	0.43	0.43	1.06
N2406-02-04	1/8	1/4	1.42	0.60	0.50	0.09	0.43	0.43	1.16
N2406-04-02	1/4	1/8	1.45	0.70	0.60	0.08	0.56	0.56	1.16
N2406-04-04	1/4	1/4	1.54	0.70	0.60	0.19	0.56	0.56	1.25
N2406-04-06	1/4	3/8	1.60	0.70	0.60	0.19	0.56	0.56	1.31
N2406-04-08	1/4	1/2	1.82	0.70	0.60	0.19	0.56	0.56	1.53
N2406-05-06	5/16	3/8	1.65	0.73	0.64	0.25	0.56	0.63	1.36
N2406-05-08	5/16	1/2	1.87	0.73	0.64	0.25	0.56	0.63	1.58
N2406-06-04	3/8	1/4	1.63	0.76	0.66	0.19	0.63	0.67	1.34
N2406-06-06	3/8	3/8	1.70	0.76	0.66	0.28	0.63	0.67	1.41
N2406-06-08	3/8	1/2	1.91	0.76	0.66	0.28	0.63	0.67	1.62
N2406-08-04	1/2	1/4	1.77	0.86	0.90	0.19	0.87	0.87	1.37
N2406-08-06	1/2	3/8	1.84	0.86	0.90	0.28	0.87	0.87	1.44
N2406-08-08	1/2	1/2	2.06	0.86	0.90	0.39	0.87	0.87	1.66
N2406-08-12	1/2	3/4	2.12	0.86	0.90	0.41	0.87	0.87	1.72
N2406-08-16	1/2	1	2.37	0.86	0.90	0.41	1.06	0.87	1.97
N2406-10-12	5/8	3/4	2.15	0.86	0.96	0.50	0.94	0.98	1.75
N2406-10-14	5/8	7/8	2.21	0.86	0.96	0.50	0.94	0.98	1.81
N2406-12-08	3/4	1/2	2.15	0.86	0.96	0.39	1.06	1.12	1.75
N2406-12-16	3/4	1	2.46	0.86	0.96	0.62	1.06	1.12	2.06
N2406-16-20	1	1-1/4	3.17	1.04	1.23	0.88	1.38	1.50	2.69
N2406-16-24	1	1-1/2	3.51	1.04	1.23	0.88	1.62	1.50	3.03

# Double-Ferrule Tube Fittings


## Cap N2408

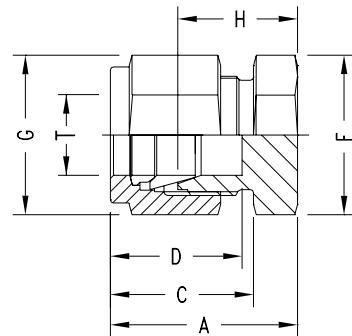

Part No.	T Tube OD	A	C	D	F A/F	G A/F	H
N2408-01	1/16	0.59	0.43	0.34	0.43	0.31	0.44
N2408-02	1/8	0.79	0.60	0.50	0.43	0.43	0.53
N2408-04	1/4	0.92	0.70	0.60	0.56	0.56	0.63
N2408-05	5/16	0.96	0.73	0.64	0.63	0.63	0.67
N2408-06	3/8	1.01	0.76	0.66	0.67	0.67	0.72
N2408-08	1/2	1.15	0.86	0.90	0.87	0.87	0.75
N2408-10	5/8	1.18	0.86	0.96	0.94	0.98	0.78
N2408-12	3/4	1.24	0.86	0.96	1.06	1.12	0.84
N2408-14	7/8	1.34	0.86	1.02	1.42	1.26	0.94
N2408-16	1	1.51	1.04	1.23	1.42	1.50	1.03
N2408-20	1-1/4	2.10	1.53	1.62	1.81	1.97	1.23
N2408-24	1-1/2	2.54	1.78	1.97	2.17	2.24	1.47
N2408-32	2	3.41	2.47	2.66	2.76	3.00	1.94

## Butt Weld Male Connector N2425

Tube x Male Pipe Weld

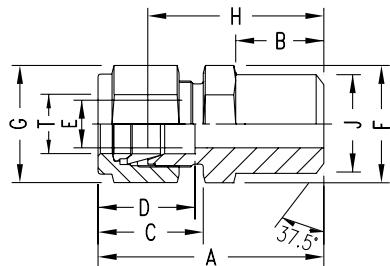


Part No.	T Tube OD	Pipe Weld Male	A	B	C	D	E min.	F A/F	G A/F	H	J
N2425-02-02	1/8	1/8	1.20	0.38	0.60	0.50	0.09	0.43	0.43	0.94	0.41
N2425-04-02	1/4	1/8	1.29	0.38	0.70	0.60	0.19	0.56	0.56	1.00	0.41
N2425-04-04	1/4	1/4	1.49	0.56	0.70	0.60	0.19	0.56	0.56	1.20	0.54
N2425-05-02	5/16	1/8	1.34	0.38	0.73	0.64	0.20	0.56	0.63	1.05	0.41
N2425-05-04	5/16	1/4	1.52	0.56	0.73	0.64	0.25	0.63	0.63	1.23	0.54
N2425-06-04	3/8	1/4	1.57	0.56	0.76	0.66	0.28	0.63	0.67	1.28	0.54
N2425-06-06	3/8	3/8	1.57	0.56	0.76	0.66	0.28	0.67	0.67	1.28	0.68
N2425-06-08	3/8	1/2	1.82	0.75	0.76	0.66	0.28	0.87	0.67	1.53	0.84
N2425-08-06	1/2	3/8	1.71	0.56	0.86	0.90	0.41	0.81	0.87	1.31	0.68
N2425-08-08	1/2	1/2	1.93	0.75	0.86	0.90	0.41	0.87	0.87	1.53	0.84
N2425-08-12	1/2	3/4	1.99	0.75	0.86	0.90	0.41	1.06	0.87	1.59	1.05
N2425-10-08	5/8	1/2	1.93	0.75	0.86	0.96	0.50	0.94	0.98	1.53	0.84
N2425-12-12	3/4	3/4	1.99	0.75	0.86	0.96	0.62	1.06	1.12	1.59	1.05
N2425-16-16	1	1	2.45	0.94	1.04	1.23	0.88	1.42	1.50	1.97	1.31
N2425-20-205	1-1/4	1-1/4	3.04	0.94	1.53	1.62	1.09	1.81	1.97	2.17	1.66
N2425-24-24	1-1/2	1-1/2	3.50	1.03	1.78	1.97	1.34	2.17	2.36	2.43	1.90

## Socket Weld Male Connector N2426


Tube x Male Socket Weld

Part No.	T Tube OD	A	B	Bx	C	D	E min.	F A/F	G A/F	H	J
N2426-02-02	1/8	1.14	0.34	0.25	0.60	0.50	0.09	0.43	0.43	0.90	0.31
N2426-04-04	1/4	1.32	0.41	0.31	0.70	0.60	0.19	0.56	0.56	1.03	0.44
N2426-06-06	3/8	1.48	0.47	0.38	0.76	0.66	0.28	0.63	0.67	1.19	0.62
N2426-08-08	1/2	1.62	0.47	0.50	0.86	0.90	0.41	0.87	0.87	1.22	0.75
N2426-12-12	3/4	1.71	0.47	0.56	0.86	0.96	0.62	1.06	1.12	1.31	1.05
N2426-16-16	1	2.07	0.56	0.75	1.04	1.23	0.88	1.42	1.50	1.59	1.31
N2426-20-20	1-1/4	2.85	0.75	0.75	1.53	1.62	1.09	1.77	1.97	1.98	1.65
N2426-24-24	1-1/2	3.22	0.75	0.94	1.78	1.97	1.34	2.17	2.24	2.15	1.97

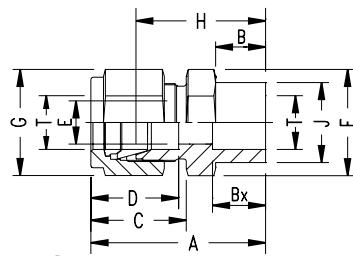

## Male Adapter N2427


Machined Tube Stub x Male JIC

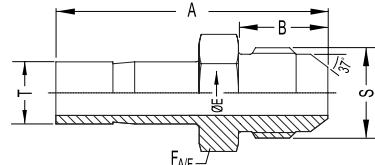

Part No.	T Tube OD	Flare Size	A	B	E min.	F A/F
N2427-04-04	1/4	1/4	1.50	0.55	0.16	0.50
N2427-06-06	3/8	3/8	1.56	0.55	0.28	0.63
N2427-08-08	1/2	1/2	1.90	0.66	0.39	0.81
N2427-12-12	3/4	3/4	2.20	0.86	0.59	1.13
N2427-16-16	1	1	1.87	0.91	0.25	1.42
N2427-20-20	1-1/4	1-1/4	3.16	0.96	1.07	1.81
N2427-24-24	1-1/2	1-1/2	3.70	1.08	1.31	2.00

## Male Adapter N2428

Machined Tube Stub x Male NPT Threads

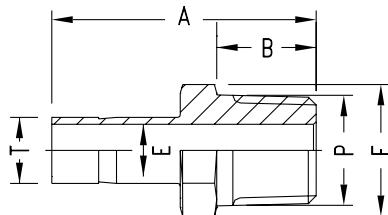


Part No.	T Tube OD	P NPT Male	A	E B	F min.	A/F
N2428-02-02	1/8	1/8	29.5	9.6	2.3	11
N2428-02-04	1/8	1/4	34.8	14.3	2.3	14
N2428-04-02	1/4	1/8	31.8	9.6	4.8	11
N2428-04-04	1/4	1/4	37.0	14.3	4.8	14
N2428-04-06	1/4	3/8	37.8	14.3	4.8	19
N2428-04-08	1/4	1/2	43.4	19.1	4.8	22
N2428-05-04	5/16	1/4	38.1	14.3	6.4	14
N2428-06-04	3/8	1/4	38.9	14.3	7.1	14
N2428-06-06	3/8	3/8	39.6	14.3	7.1	19
N2428-06-08	3/8	1/2	45.2	19.1	7.1	22
N2428-08-04	1/2	1/4	44.5	14.3	7.1	14
N2428-08-06	1/2	3/8	45.2	14.3	9.9	19
N2428-08-08	1/2	1/2	50.8	19.1	9.9	22
N2428-10-08	5/8	1/2	52.3	19.1	11.9	22
N2428-12-08	3/4	1/2	52.3	19.1	11.9	22
N2428-12-12	3/4	3/4	52.3	19.1	15.0	27
N2428-16-12	1	3/4	58.7	19.1	15.7	27
N2428-16-16	1	1	66.0	23.8	20.3	36
N2428-20-20	1-1/4	1-1/4	80.3	23.8	27.6	45
N2428-24-24	1-1/2	1-1/2	94.5	26.2	33.2	55

# Double-Ferrule Tube Fittings

## O-Seal Male Adapter N2429

Machined Tube Stub x Male Straight Threads

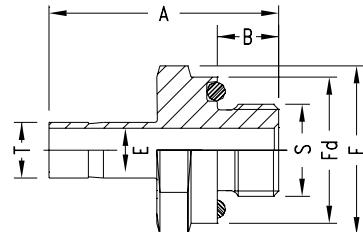


Part No.	T Tube Male	S-SAE/MS Male	A	B	min.	Fd F	O Ring* A/F	Part No.
N2429-02-02	5/16-24	1/8	32.5	8.6	2.4	14	13.8	4001-01
N2429-04-04	7/16-24	1/4	39.2	10.4	4.8	19	18.8	4001-02
N2429-05-05	1/2-24	5/16	41.7	11.2	6.3	22	21.8	4001-03
N2429-06-06	9/16-24	3/8	43.2	12.0	7.1	24	23.6	4001-04
N2429-08-08	3/4-24	1/2	49.5	12.0	9.9	27	26.8	4001-06
N2429-12-12	1-1/16-12	3/4	55.0	14.3	15.0	38	37.8	4001-12
N2429-16-16	1-5/16-12	1	62.5	14.3	19.8	45	44.0	4001-16
N2429-20-20	1-5/8-12	1-1/4	79.5	18.3	27.4	55	54.0	4001-20
N2429-24-24	1-7/8-12	1-1/2	92.2	19.8	33.3	60	58.0	4001-24

\*Standard Brennan Instrumentation O-Rings are black Viton.

## Female Adapter N2430


Machined Tube Stub x Female NPT Threads

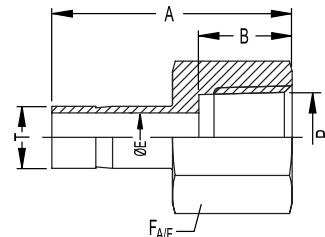

Part No.	T Tube OD	P NPT Female	A	B	F	min.	A/F
N2430-02-02	1/8	1/8	1.24	0.41	0.09		0.56
N2430-02-04	1/4	1/8	1.39	0.59	0.09		0.75
N2430-04-02	1/8	1/4	1.30	0.41	0.19		0.56
N2430-04-04	1/4	1/4	1.46	0.59	0.19		0.75
N2430-04-06	3/8	1/4	1.55	0.59	0.19		0.87
N2430-04-08	1/2	1/4	1.79	0.78	0.19		1.06
N2430-05-04	1/4	5/16	1.48	0.59	0.25		0.75
N2430-06-04	1/4	3/8	1.50	0.59	0.28		0.75
N2430-06-06	3/8	3/8	1.59	0.59	0.28		0.87
N2430-06-08	1/2	3/8	1.84	0.78	0.28		1.06
N2430-08-04	1/4	1/2	1.71	0.59	0.39		0.75
N2430-08-06	3/8	1/2	1.79	0.59	0.39		0.87
N2430-08-08	1/2	1/2	2.04	0.78	0.39		1.06
N2430-10-08	1/2	5/8	2.09	0.78	0.50		1.06
N2430-12-08	1/2	3/4	2.08	0.78	0.59		1.06
N2430-12-12	3/4	3/4	2.08	0.81	0.59		1.42
N2430-12-16	1	3/4	2.30	1.00	0.59		1.61
N2430-16-12	3/4	1	2.39	0.81	0.80		1.42
N2430-16-16	1	1	2.53	1.00	0.80		1.61
N2430-20-20	1-1/4	1-1/4	3.06	1.00	1.09		2.17
N2430-24-24	1-1/2	1-1/2	3.50	1.09	1.31		2.36

## Female Gage Adapter N2431


Machined Tube Stub x Female ISO Parallel Threads (gage)

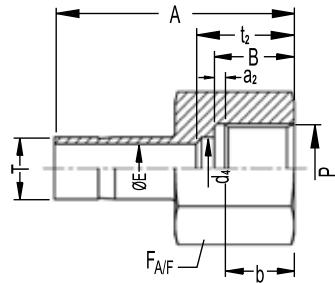

Part No.	T Tube OD	P ISO Female	A	B	E min.	F A/F	a2	d4	b	t2
N2431-04-04	1/4	1/4	1.39	0.51	0.19	0.75	0.06	0.22	0.37	0.67
N2431-06-06	3/8	3/8	1.55	0.56	0.26	0.94	0.06	-	0.39	-
N2431-08-08	1/2	1/2	1.80	0.74	0.28	1.06	0.06	-	0.57	-


No seal is made around the male thread. Instead, a gasket is dropped into the flat bottom in the female thread, and the end of the male threaded end exerts a load on the gasket to seal.

## Port Connector N2440

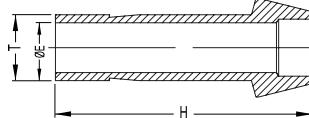

Part No.	T Tube OD	E min.	H
N2440-01-01	1/16	0.03	0.54
N2440-02-02	1/8	0.09	0.88
N2440-04-04	1/4	0.19	0.97
N2440-05-05	5/16	0.25	1.02
N2440-06-06	3/8	0.30	1.03
N2440-08-08	1/2	0.39	1.41
N2440-12-12	3/4	0.59	1.47
N2440-16-16	1	0.80	1.89

## Reducing Port Connector N2440




Part No.	T Tube OD	Tx Tube OD	E	H
N2440-02-01	1/16	1/16	0.03	0.68
N2440-04-01	1/8	1/16	0.03	0.71
N2440-04-02	1/4	1/8	0.09	0.89
N2440-06-02	3/8	1/8	0.09	0.91
N2440-06-04	3/8	1/4	0.19	0.98
N2440-08-04	1/2	1/4	0.19	1.15
N2440-08-06	1/2	3/8	0.28	1.20
N2440-12-08	3/4	1/2	0.39	1.49
N2440-16-08	1	1/2	0.39	1.68
N2440-16-12	1	3/4	0.59	1.71

# Double-Ferrule Tube Fittings

## Union Elbow N2500


Tube X Tube

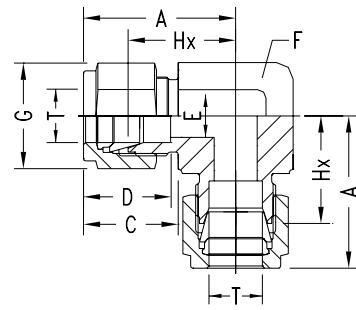

Part No.	T Tube OD	A	C	D	E min.	F A/F	G	Hx
N2500-01-01	1/16	0.70	0.43	0.34	0.05	0.43	0.31	0.55
N2500-02-02	1/8	0.88	0.60	0.50	0.09	0.43	0.43	0.62
N2500-04-04	1/4	1.06	0.70	0.60	0.19	0.55	0.56	0.77
N2500-05-05	5/16	1.13	0.73	0.64	0.25	0.63	0.63	0.84
N2500-06-06	3/8	1.20	0.76	0.66	0.28	0.67	0.67	0.91
N2500-08-08	1/2	1.42	0.86	0.90	0.41	0.81	0.87	1.02
N2500-10-10	5/8	1.50	0.86	0.96	0.50	0.94	0.98	1.10
N2500-12-12	3/4	1.57	0.86	0.96	0.62	1.06	1.12	1.17
N2500-14-14	7/8	1.76	0.86	1.02	0.72	1.42	1.26	1.36
N2500-16-16	1	1.93	1.04	1.23	0.88	1.42	1.50	1.45
N2500-20-20	1-1/4	2.62	1.53	1.62	1.09	1.81	1.97	1.75
N2500-24-24	1-1/2	3.07	1.78	1.97	1.34	2.17	2.24	2.00
N2500-32-32	2	4.22	2.47	2.66	1.81	2.76	3.00	2.75

## Male Elbow N2501


Tube X Male NPT Thread

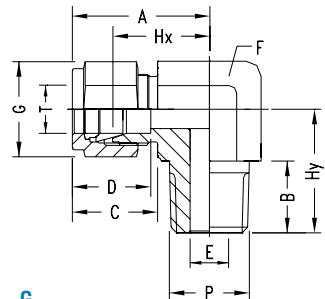

Part No.	T Tube OD	P NPT Male	A	B	C	D	E min.	F A/F	G A/F	Hx	Hy
N2501-01-01	1/16	1/16	0.75	0.38	0.43	0.34	0.05	0.43	0.43	0.60	0.70
N2501-01-02	1/16	1/8	0.75	0.38	0.43	0.34	0.05	0.43	0.43	0.60	0.70
N2501-02-02	1/8	1/8	0.93	0.38	0.60	0.50	0.09	0.43	0.43	0.67	0.70
N2501-02-04	1/8	1/4	0.97	0.56	0.60	0.50	0.09	0.55	0.43	0.71	0.92
N2501-04-02	1/4	1/8	1.06	0.38	0.70	0.60	0.19	0.55	0.55	0.77	0.74
N2501-04-04	1/4	1/4	1.06	0.56	0.70	0.60	0.19	0.55	0.55	0.77	0.92
N2501-04-06	1/4	3/8	1.17	0.56	0.70	0.60	0.19	0.75	0.55	0.88	1.03
N2501-04-08	1/4	1/2	1.25	0.75	0.70	0.60	0.19	0.87	0.55	0.96	1.30
N2501-05-04	5/16	1/4	1.13	0.56	0.73	0.64	0.25	0.55	0.63	0.84	0.96
N2501-06-02	3/8	1/8	1.20	0.38	0.76	0.66	0.19	0.55	0.67	0.91	0.82
N2501-06-04	3/8	1/4	1.20	0.56	0.76	0.66	0.28	0.67	0.67	0.91	1.00
N2501-06-06	3/8	3/8	1.23	0.56	0.76	0.66	0.28	0.75	0.67	0.94	1.03
N2501-06-08	3/8	1/2	1.31	0.75	0.76	0.66	0.28	0.87	0.67	1.02	1.30
N2501-08-04	1/2	1/4	1.42	0.56	0.86	0.90	0.28	0.81	0.87	1.02	1.11
N2501-08-06	1/2	3/8	1.42	0.56	0.86	0.90	0.38	0.81	0.87	1.02	1.11
N2501-08-08	1/2	1/2	1.42	0.75	0.86	0.90	0.41	0.87	0.87	1.02	1.30
N2501-08-12	1/2	3/4	1.57	0.75	0.86	0.90	0.41	1.06	0.87	1.17	1.45
N2501-10-08	5/8	1/2	1.50	0.75	0.86	0.96	0.47	0.94	0.98	1.10	1.38
N2501-12-08	3/4	1/2	1.57	0.75	0.86	0.96	0.47	1.06	1.12	1.17	1.45
N2501-12-12	3/4	3/4	1.57	0.75	0.86	0.96	0.62	1.06	1.12	1.17	1.45
N2501-14-12	7/8	3/4	1.76	0.75	0.86	1.02	0.62	1.42	1.26	1.36	1.64
N2501-16-12	1	3/4	1.93	0.75	1.04	1.23	0.62	1.42	1.50	1.45	1.64
N2501-16-16	1	1	1.93	0.94	1.04	1.23	0.88	1.42	1.50	1.45	1.83
N2501-20-20	1-1/4	1-1/4	2.62	0.94	1.53	1.62	1.09	1.81	1.97	1.75	1.88
N2501-24-24	1-1/2	1-1/2	3.07	1.06	1.78	1.97	1.34	2.17	2.24	2.00	2.38
N2501-32-32	2	2	4.22	1.06	2.47	2.66	1.81	2.76	2.99	2.75	2.78

# Female Elbow N2502


Tube x Female NPT Threads

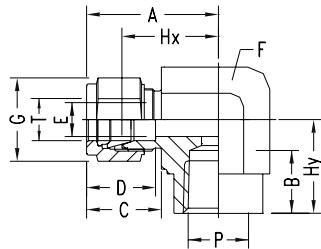

Part No.	T Tube OD	P NPT Female	A	B	C	D	E min.	F A/F	G A/F	Hx	Hy
N2502-02-02	1/8	1/8	0.97	0.41	0.60	0.50	0.09	0.55	0.43	0.71	0.75
N2502-02-04	1/8	1/4	1.08	0.59	0.60	0.50	0.09	0.75	0.43	0.82	0.88
N2502-04-02	1/4	1/8	1.06	0.41	0.70	0.60	0.19	0.55	0.56	0.77	0.75
N2502-04-04	1/4	1/4	1.17	0.59	0.70	0.60	0.19	0.75	0.56	0.88	0.88
N2502-04-06	1/4	3/8	1.25	0.59	0.70	0.60	0.19	0.87	0.56	0.96	0.88
N2502-04-08	1/4	1/2	1.36	0.78	0.70	0.60	0.19	1.06	0.56	1.07	1.12
N2502-05-02	5/16	1/8	1.13	0.41	0.73	0.64	0.25	0.75	0.56	0.84	0.75
N2502-05-04	5/16	1/4	1.20	0.59	0.73	0.64	0.25	0.87	0.63	0.91	0.88
N2502-06-02	3/8	1/8	1.20	0.41	0.76	0.66	0.28	0.67	0.67	0.91	0.75
N2502-06-04	3/8	1/4	1.23	0.59	0.76	0.66	0.28	0.75	0.67	0.94	0.88
N2502-06-06	3/8	3/8	1.31	0.59	0.76	0.66	0.28	0.87	0.67	1.02	0.88
N2502-06-08	3/8	1/2	1.42	0.78	0.76	0.66	0.28	1.06	0.67	1.13	1.12
N2502-08-04	1/2	1/4	1.42	0.59	0.86	0.90	0.41	0.87	0.87	1.02	0.88
N2502-08-06	1/2	3/8	1.42	0.59	0.86	0.90	0.41	0.87	0.87	1.02	0.88
N2502-08-08	1/2	1/2	1.53	0.78	0.86	0.90	0.41	1.06	0.87	1.13	1.12
N2502-10-06	5/8	3/8	1.50	0.59	0.86	0.90	0.50	0.94	0.87	1.10	0.88
N2502-10-08	5/8	1/2	1.57	0.78	0.86	0.96	0.50	1.06	0.98	1.17	1.12
N2502-12-08	3/4	1/2	1.57	0.78	0.86	0.96	0.62	1.06	1.12	1.17	1.12
N2502-12-12	3/4	3/4	1.76	0.81	0.86	0.96	0.62	1.42	1.12	1.36	1.25
N2502-14-12	7/8	3/4	1.76	0.81	0.86	1.02	0.72	1.42	1.26	1.36	1.25
N2502-16-12	1	3/4	1.93	0.81	1.04	1.23	0.88	1.42	1.50	1.45	1.25
N2502-16-16	1	1	2.11	1.00	1.04	1.23	0.88	1.61	1.50	1.63	1.50

# 45° Male Elbow N2503

Tube x Male NPT Threads

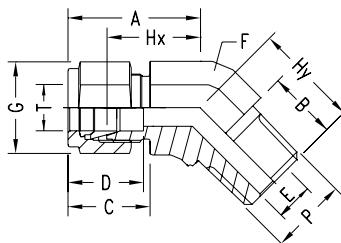


Part No.	T Tube OD	P NPT Male	A	B	C	D	E min.	F A/F	G A/F	Hx	Hy
N2503-04-02	1/4	1/8	0.97	0.38	0.70	0.60	0.19	0.55	0.56	0.68	0.65
N2503-04-04	1/4	1/4	0.97	0.56	0.70	0.60	0.19	0.55	0.56	0.68	0.83
N2503-06-02	3/8	1/8	1.10	0.38	0.76	0.66	0.19	0.67	0.67	0.81	0.72
N2503-06-04	3/8	1/4	1.10	0.56	0.76	0.66	0.28	0.67	0.67	0.81	0.90
N2503-06-06	3/8	3/8	1.15	0.56	0.76	0.66	0.28	0.75	0.67	0.86	0.95
N2503-08-06	1/2	3/8	1.26	0.56	0.86	0.90	0.38	0.87	0.87	0.86	0.95
N2503-08-08	1/2	1/2	1.26	0.75	0.86	0.90	0.41	0.87	0.87	0.86	1.14
N2503-12-12	3/4	3/4	1.34	0.75	0.86	0.96	0.62	1.06	1.12	0.94	1.22
N2503-16-16	1	1	1.59	0.94	1.04	1.23	0.88	1.42	1.50	1.11	1.49

# Double-Ferrule Tube Fittings

## Butt Weld Male Elbow N2525


Tube X 90° Male Pipe Weld

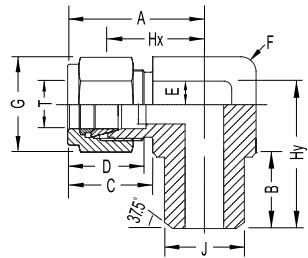

Part No.	T Tube OD	Pipe Weld Male	A	B	C	D	E min.	F A/F	G A/F	Hx	Hy	J
N2525-04-02	1/4	1/8	1.06	0.38	0.70	0.60	0.19	0.56	0.56	0.77	0.74	0.41
N2525-04-04	1/4	1/4	1.06	0.56	0.70	0.60	0.19	0.56	0.56	0.77	0.92	0.54
N2525-06-04	3/8	1/4	1.20	0.56	0.76	0.66	0.28	0.63	0.67	0.91	1.02	0.54
N2525-08-08	1/2	1/2	1.42	0.75	0.86	0.90	0.41	0.87	0.87	1.02	1.30	0.84
N2525-12-12	3/4	3/4	1.57	0.75	0.86	0.96	0.62	1.06	1.12	1.16	1.45	1.05
N2525-16-16	1	1	1.93	0.94	1.04	1.23	0.88	1.42	1.50	1.45	1.83	1.31
N2525-20-20	1-1/4	1-1/4	2.62	0.94	1.53	1.62	1.09	1.77	1.97	1.75	1.88	1.66
N2525-24-24	1-1/2	1-1/2	3.07	1.03	1.78	1.97	1.34	2.17	2.24	2.00	2.38	1.90

## Socket Weld Male Elbow N2526


Tube X 90° Male Socket Weld

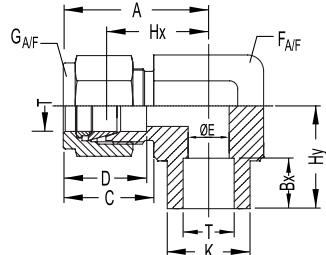

Part No.	T Tube OD	A	Bx	C	D	E min.	F A/F	G A/F	Hx	Hy	K
N2526-04-04	1/4	1.06	0.31	0.70	0.60	0.19	0.55	0.56	0.77	0.77	0.50
N2526-06-06	3/8	1.20	0.38	0.76	0.66	0.28	0.63	0.67	0.91	0.91	0.62
N2526-08-08	1/2	1.42	0.50	0.86	0.90	0.41	0.87	0.87	1.02	1.02	0.81
N2526-12-12	3/4	1.57	0.56	0.86	0.96	0.62	1.06	1.12	1.17	1.17	1.06
N2526-16-16	1	1.93	0.75	1.04	1.23	0.88	1.42	1.50	1.45	1.45	1.38
N2526-20-20	1-1/4	2.62	0.75	1.53	1.62	1.09	1.77	1.97	1.75	1.88	1.69
N2526-24-24	1-1/2	3.07	0.94	1.78	1.97	1.34	1.97	2.24	2.00	2.38	1.89

# Male Branch Tee N2601


Tube x Tube x Male NPT Threads

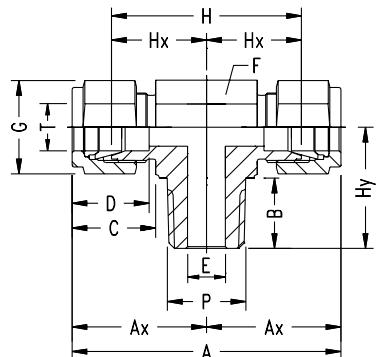

Part No.	T Tube OD	P NPT Male	A	Ax	B	C	D	E min.	F	G A/F	H A/F	Hx	Hy
N2601-02-02-02	1/8	1/8	1.86	0.93	0.38	0.60	0.50	0.09	0.43	0.43	1.34	0.67	0.70
N2601-02-02-04	1/8	1/4	1.94	0.97	0.56	0.60	0.50	0.09	0.56	0.43	1.42	0.71	0.92
N2601-04-04-02	1/4	1/8	2.12	1.06	0.38	0.70	0.60	0.19	0.56	0.56	1.54	0.77	0.74
N2601-04-04-04	1/4	1/4	2.12	1.06	0.56	0.70	0.60	0.19	0.56	0.56	1.54	0.77	0.92
N2601-04-04-06	1/4	3/8	2.34	1.17	0.56	0.70	0.60	0.19	0.75	0.56	1.76	0.88	1.03
N2601-04-04-08	1/4	1/2	2.50	1.25	0.75	0.70	0.60	0.19	0.87	0.56	1.76	0.96	1.30
N2601-06-06-04	3/8	1/4	2.40	1.20	0.56	0.76	0.66	0.28	0.67	0.67	1.82	0.91	1.00
N2601-06-06-06	3/8	3/8	2.45	1.23	0.56	0.76	0.66	0.28	0.75	0.67	1.88	0.99	1.03
N2601-06-06-08	3/8	1/2	2.60	1.30	0.75	0.76	0.66	0.28	0.87	0.67	2.04	1.02	1.30
N2601-08-08-04	1/2	1/4	2.83	1.42	0.56	0.86	0.90	0.19	0.81	0.87	2.04	1.02	1.11
N2601-08-08-06	1/2	3/8	2.84	1.42	0.56	0.86	0.90	0.38	0.81	0.87	2.04	1.02	1.11
N2601-08-08-08	1/2	1/2	2.84	1.42	0.75	0.86	0.90	0.41	0.87	0.87	2.04	1.02	1.30
N2601-10-10-08	5/8	1/2	3.06	1.53	0.75	0.86	0.96	0.47	0.87	0.98	2.26	1.13	1.41
N2601-12-12-08	3/4	1/2	3.14	1.57	0.75	0.86	0.96	0.47	1.06	1.12	2.34	1.17	1.45
N2601-12-12-12	3/4	3/4	3.14	1.57	0.75	0.86	0.96	0.62	1.06	1.12	2.34	1.17	1.45
N2601-16-16-12	1	3/4	3.86	1.93	0.75	1.04	1.23	0.62	1.42	1.50	2.90	1.45	1.64
N2601-16-16-16	1	1	3.86	1.93	0.94	1.04	1.23	0.88	1.42	1.50	2.90	1.45	1.83
N2601-20-20-20	1-1/4	1-1/4	5.24	2.62	0.94	1.53	1.62	1.09	1.81	1.97	3.50	1.75	1.87
N2601-24-24-24	1-1/2	1-1/2	6.14	3.07	1.03	1.78	1.97	1.34	2.17	2.24	4.00	2.00	2.38

# Female Branch Tee N2602

Tube x Tube x Female NPT Threads

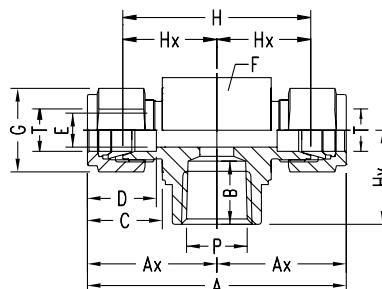


Part No.	T Tube OD	P NPT Female	A	Ax	B	C	D	E min.	F	G A/F	H A/F	Hx	Hy
N2602-02-02-02	1/8	1/8	1.94	0.97	0.41	0.60	0.50	0.09	0.56	0.43	1.42	0.71	0.75
N2602-04-04-02	1/4	1/8	2.12	1.06	0.41	0.70	0.60	0.19	0.56	0.56	1.54	0.77	0.75
N2602-04-04-04	1/4	1/4	2.34	1.17	0.59	0.70	0.60	0.19	0.75	0.56	1.76	0.88	0.88
N2602-06-06-04	3/8	1/4	2.46	1.23	0.59	0.76	0.66	0.28	0.63	0.63	1.88	0.94	0.88
N2602-06-06-06	3/8	3/8	2.62	1.31	0.59	0.76	0.66	0.28	0.87	0.63	2.04	1.02	0.88
N2602-08-08-06	1/2	3/8	2.83	1.42	0.59	0.86	0.90	0.41	0.87	0.87	2.04	1.02	0.88
N2602-08-08-08	1/2	1/2	3.06	1.53	0.78	0.86	0.90	0.41	1.06	0.87	2.26	1.13	1.12
N2602-12-12-12	3/4	3/4	3.52	1.76	0.81	0.86	0.96	0.62	1.42	0.87	2.72	1.36	1.25
N2602-16-16-12	1	3/4	3.86	1.93	0.81	1.04	1.23	0.88	1.42	0.98	2.90	1.45	1.25
N2602-16-16-16	1	1	4.22	2.11	1.00	1.04	1.23	0.88	1.61	1.50	3.26	1.63	1.50

# Double-Ferrule Tube Fittings

## Union Tee N2603


Tube x Tube x Tube

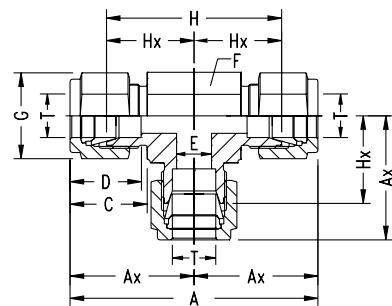

Part No.	T Tube OD	A	Ax	C	D	E min.	F A/F	G A/F	H	Hx
N2603-01-01-01	1/16	1.40	0.70	0.43	0.34	0.05	0.43	0.31	1.10	0.55
N2603-02-02-02	1/8	1.76	0.88	0.60	0.50	0.09	0.43	0.43	1.24	0.62
N2603-04-04-04	1/4	2.12	1.06	0.70	0.60	0.19	0.56	0.56	1.54	0.77
N2603-05-05-05	5/16	2.34	1.17	0.73	0.64	0.25	0.63	0.63	1.68	0.84
N2603-06-06-06	3/8	2.40	1.20	0.76	0.66	0.28	0.63	0.67	1.83	0.91
N2603-08-08-08	1/2	2.84	1.42	0.86	0.90	0.41	0.81	0.87	2.04	1.02
N2603-10-10-10	5/8	3.06	1.53	0.86	0.96	0.50	0.94	0.98	2.20	1.10
N2603-12-12-12	3/4	3.14	1.57	0.86	0.96	0.62	1.06	1.12	2.34	1.17
N2603-14-14-14	7/8	3.52	1.76	0.86	1.02	0.72	1.42	1.26	2.72	1.36
N2603-16-16-16	1	3.86	1.93	1.04	1.23	0.88	1.42	1.50	2.90	1.45
N2603-20-20-20	1-1/4	5.24	2.62	1.53	1.62	1.09	1.81	1.97	3.50	1.75
N2603-24-24-24	1-1/2	6.14	3.07	1.78	1.97	1.34	2.17	2.24	4.00	2.00
N2603-32-32-32	2	8.44	4.22	2.47	2.67	1.81	2.76	3.00	5.50	2.75

## Reducing Union Tee N2603

Tube x Tube x Tube

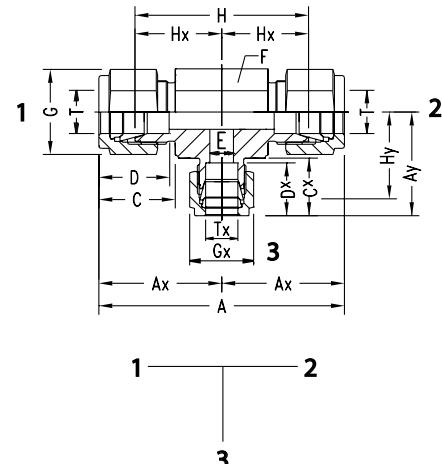


Part No.	T Tube OD	Tx Tube OD	A	Ax	Ay	C	Cx	D	Dx	E min.	F A/F	G A/F	Gx A/F	H	Hx	Hy
N2603-06-06-04	3/8	1/4	2.40	1.20	1.14	0.76	0.70	0.66	0.60	0.19	0.63	0.67	0.56	1.82	0.91	0.85
N2603-08-08-04	1/2	1/4	2.84	1.42	1.25	0.86	0.70	0.90	0.60	0.19	0.81	0.87	0.56	2.04	1.02	0.96
N2603-08-08-06	1/2	3/8	2.84	1.42	1.31	0.86	0.76	0.90	0.66	0.28	0.81	0.87	0.67	2.04	1.02	1.02
N2603-12-12-06	3/4	3/8	3.14	1.57	1.46	0.86	0.76	0.96	0.66	0.28	1.06	1.12	0.67	2.34	1.17	1.17
N2603-12-12-08	3/4	1/2	3.14	1.57	1.57	0.86	0.86	0.96	0.90	0.41	1.06	1.12	0.87	2.34	1.17	1.17
N2603-16-16-08	1	3/8	3.86	1.93	1.65	1.04	0.76	1.23	0.66	0.28	1.42	1.50	0.67	2.90	1.45	1.36
N2603-16-16-08	1	1/2	3.86	1.93	1.76	1.04	0.90	1.23	0.86	0.41	1.42	1.50	0.87	2.90	1.45	1.36
N2603-16-16-12	1	3/4	3.86	1.93	1.76	1.04	0.86	1.23	0.96	0.62	1.42	1.50	1.12	2.90	1.45	1.36
N2603-20-20-16	1-1/4	1	5.34	2.67	2.17	1.53	1.04	1.62	1.23	0.88	1.81	1.97	1.50	3.60	1.80	1.69
N2603-24-24-16	1-1/2	1	6.20	3.10	2.36	1.78	1.04	1.97	1.23	0.88	2.17	2.24	1.50	4.06	2.03	1.88

continued on next page

## Reducing Union Tee N2603 *Continued*


Tube x Tube x Tube

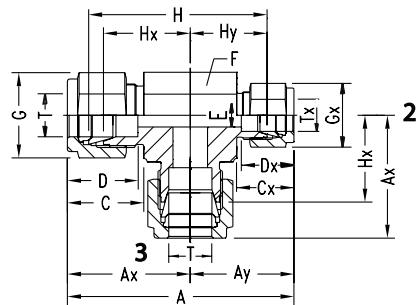

Part No.	T Tube		Tx Tube		A	Ax	Ay	C	Cx	D	Dx	E min.	F	G A/F	Gx A/F	H	Hx	Hy
	OD	OD	OD	OD														
N2603-06-04-06	3/8	1/4	2.34	1.20	1.14	0.76	0.70	0.66	0.60	0.60	0.19	0.63	0.67	0.56	1.76	0.91	0.85	
N2603-08-04-08	1/2	1/4	2.67	1.42	1.25	0.86	0.70	0.90	0.60	0.60	0.19	0.87	0.87	0.56	1.98	1.02	0.96	
N2603-08-06-08	1/2	3/8	2.73	1.42	1.31	0.86	0.76	0.90	0.66	0.66	0.28	0.87	0.87	0.67	2.04	1.02	1.02	
N2603-12-06-12	3/4	3/8	3.03	1.57	1.46	0.86	0.76	0.96	0.66	0.66	0.28	1.06	1.12	0.67	2.34	1.17	1.17	
N2603-12-08-12	3/4	1/2	3.14	1.57	1.57	0.86	0.86	0.96	0.90	0.90	0.41	1.06	1.12	0.87	2.34	1.17	1.17	
N2603-16-06-16	1	3/8	3.89	1.93	1.65	1.04	0.76	1.23	0.66	0.66	0.28	1.42	1.50	0.67	2.81	1.45	1.36	
N2603-16-08-16	1	1/2	3.69	1.93	1.76	1.04	0.86	1.23	0.86	0.86	0.41	1.42	1.50	0.87	2.81	1.45	1.36	
N2603-16-12-16	1	3/4	3.69	1.93	1.76	1.04	0.86	1.23	0.96	0.96	0.62	1.42	1.50	1.12	2.81	1.45	1.36	
N2603-20-16-20	1-1/4	1	4.71	2.67	2.09	1.53	1.04	1.62	1.23	1.23	0.72	1.81	1.97	1.50	3.36	1.80	1.61	
N2603-24-20-24	1-1/2	1	5.94	3.10	2.87	1.78	1.53	1.97	1.63	1.63	1.09	2.17	2.24	1.50	4.00	2.00	2.00	

## Reducing Union Tee N2603 *Continued*

Tube x Tube x Tube

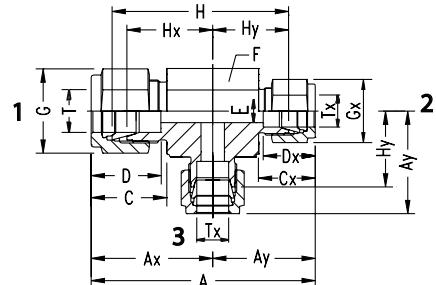


Part No.	T Tube		Tx Tube		A	Ax	Ay	C	Cx	D	Dx	E min.	F	G A/F	Gx A/F	H	Hx	Hy
	OD	OD	OD	OD														
N2603-06-04-04	3/8	1/4	2.34	1.20	1.14	0.76	0.70	0.66	0.60	0.60	0.19	0.63	0.67	0.56	1.76	0.91	0.85	
N2603-08-04-04	1/2	1/4	2.67	1.42	1.25	0.86	0.70	0.90	0.60	0.60	0.19	0.81	0.87	0.56	1.98	1.02	0.96	
N2603-08-06-06	1/2	3/8	2.73	1.42	1.31	0.86	0.76	0.90	0.66	0.66	0.28	0.81	0.87	0.67	2.04	1.02	1.02	
N2603-12-06-06	3/4	3/8	3.03	1.57	1.46	0.86	0.76	0.96	0.66	0.66	0.28	1.06	1.12	0.67	2.34	1.17	1.17	
N2603-12-08-08	3/4	1/2	3.14	1.57	1.57	0.86	0.86	0.96	0.90	0.90	0.41	1.06	1.12	0.87	2.34	1.17	1.17	
N2603-16-06-06	1	3/8	3.93	1.57	1.65	1.04	0.76	1.23	0.66	0.66	0.28	1.42	1.50	0.67	2.81	1.45	1.36	
N2603-16-08-08	1	1/2	3.69	1.93	1.76	1.04	0.90	1.23	0.86	0.86	0.41	1.42	1.50	0.87	2.81	1.45	1.36	
N2603-16-12-12	1	3/4	3.69	1.93	1.76	1.04	0.96	1.23	0.96	0.96	0.62	1.42	1.50	1.12	2.81	1.45	1.36	
N2603-20-16-16	1-1/4	1	4.84	2.67	2.17	1.53	1.04	1.62	1.23	1.23	0.88	1.81	1.97	1.50	3.49	1.80	1.69	
N2603-24-16-16	1-1/2	1	5.46	3.10	2.36	1.76	1.04	1.97	1.23	1.23	0.88	2.17	2.24	1.50	3.91	2.03	1.88	

NOTE: The order of the sizes is as per the designation (1-2-3) in figure shown above.

# Double-Ferrule Tube Fittings

## Male Run Tee N2605


Tube x Male NPT Threads x Tube

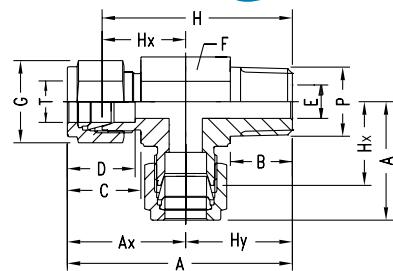

Part No.	T Tube OD	P NPT Male	A	Ax	B	C	D	E min.	F	G A/F	H A/F	Hx	Hy
N2605-02-02-02	1/8	1/8	1.63	0.93	0.38	0.60	0.50	0.09	0.43	0.43	1.37	0.67	0.70
N2605-02-04-02	1/8	1/4	1.89	0.97	0.56	0.60	0.50	0.09	0.56	0.43	1.63	0.71	0.92
N2605-04-02-04	1/4	1/8	1.80	1.06	0.38	0.70	0.60	0.19	0.56	0.56	1.51	0.77	0.74
N2605-04-04-04	1/4	1/4	1.98	1.06	0.56	0.70	0.60	0.19	0.56	0.56	1.69	0.77	0.92
N2605-04-06-04	1/4	3/8	2.20	1.17	0.56	0.70	0.60	0.19	0.75	0.56	1.92	0.88	1.03
N2605-04-08-04	1/4	1/2	2.55	1.25	0.75	0.70	0.60	0.19	0.87	0.56	2.26	0.96	1.30
N2605-06-04-06	3/8	1/4	2.20	1.20	0.56	0.76	0.66	0.28	0.67	0.67	1.91	0.91	1.00
N2605-06-06-06	3/8	3/8	2.42	1.31	0.56	0.76	0.66	0.28	0.75	0.67	2.13	1.02	1.11
N2605-06-08-06	3/8	1/2	2.60	1.30	0.75	0.76	0.66	0.28	0.87	0.67	2.32	1.02	1.30
N2605-08-04-08	1/2	1/4	2.53	1.42	0.56	0.86	0.90	0.19	0.87	0.87	2.13	1.02	1.11
N2605-08-06-08	1/2	3/8	2.53	1.42	0.56	0.86	0.90	0.38	0.81	0.87	2.13	1.02	1.11
N2605-08-08-08	1/2	1/2	2.72	1.42	0.75	0.86	0.90	0.41	0.87	0.87	2.32	1.02	1.30
N2605-10-08-10	5/8	1/2	2.88	1.50	0.75	0.86	0.96	0.47	0.87	0.98	2.48	1.10	1.38
N2605-12-08-12	3/4	1/2	3.02	1.57	0.75	0.86	0.96	0.47	1.06	1.12	2.62	1.17	1.45
N2605-12-12-12	3/4	3/4	3.02	1.57	0.75	0.86	0.96	0.62	1.06	1.12	2.62	1.17	1.45
N2605-16-12-16	1	3/4	3.57	1.93	0.75	1.04	1.23	0.62	1.42	1.50	3.09	1.45	1.64
N2605-16-16-16	1	1	3.76	1.93	0.94	1.04	1.23	0.88	1.42	1.50	3.28	1.45	1.83
N2605-20-20-20	1-1/4	1-1/4	4.49	2.62	0.94	1.53	1.62	1.09	1.81	1.97	3.63	1.75	1.87
N2605-24-24-24	1-1/2	1-1/2	5.45	3.07	1.03	1.78	1.97	1.34	2.17	2.24	4.38	2.00	2.38

## Female Run Tee N2606


Tube x Female NPT Threads x Tube

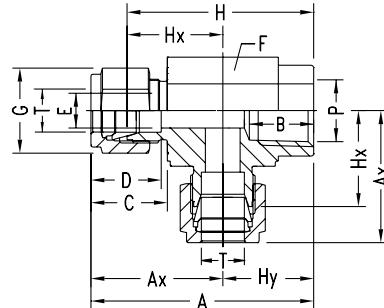

Part No.	T Tube OD	P NPT Female	A	Ax	B	C	D	E min.	F	G A/F	H	Hx	Hy
N2606-02-02-02	1/8	1/8	1.72	0.97	0.41	0.60	0.50	0.09	0.56	0.43	1.46	0.71	0.75
N2606-04-02-04	1/4	1/8	1.81	1.06	0.41	0.70	0.60	0.19	0.56	0.56	1.52	0.77	0.75
N2606-04-04-04	1/4	1/4	2.05	1.17	0.59	0.70	0.60	0.19	0.75	0.56	1.76	0.88	0.88
N2606-06-04-06	3/8	1/4	2.11	1.23	0.59	0.76	0.66	0.28	0.75	0.67	1.82	0.94	0.88
N2606-06-06-06	3/8	3/8	2.19	1.31	0.59	0.76	0.66	0.28	0.87	0.67	1.90	1.02	0.88
N2606-08-06-08	1/2	3/8	2.30	1.42	0.59	0.86	0.90	0.41	0.87	0.87	1.90	1.02	0.88
N2606-08-08-08	1/2	1/2	2.65	1.57	0.78	0.86	0.90	0.41	1.06	0.87	2.29	1.17	1.12
N2606-12-12-12	3/4	3/4	3.01	1.76	0.81	0.86	0.96	0.62	1.42	1.12	2.61	1.36	1.25
N2606-16-12-16	1	3/4	3.18	1.93	0.81	1.04	1.23	0.88	1.42	1.50	2.70	1.45	1.25
N2606-16-16-16	1	1	3.61	2.11	1.00	1.04	1.23	0.88	1.61	1.50	3.13	1.63	1.50


# Cross N2650

**Tube x Tube x Tube x Tube**

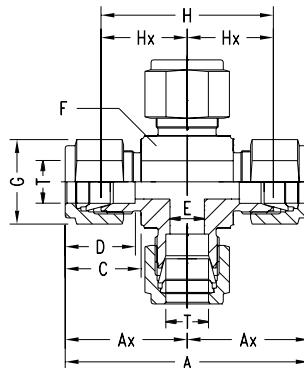

Part No.	T Tube OD	A	Ax	C	D	E min.	F A/F	G A/F	H	Hx
N2650-02-02-02	1/8	1.76	0.88	0.60	0.50	0.09	0.43	0.43	1.24	0.62
N2650-04-04-04-04	1/4	2.12	1.06	0.70	0.60	0.19	0.56	0.56	1.54	0.77
N2650-06-06-06-06	3/8	2.40	1.20	0.76	0.66	0.28	0.67	0.67	1.82	0.91
N2650-08-08-08-08	1/2	2.84	1.42	0.86	0.90	0.41	0.81	0.87	2.04	1.02
N2650-12-12-12-12	3/4	3.14	1.57	0.86	0.96	0.62	1.06	1.12	2.34	1.17
N2650-16-16-16-16	1	3.86	1.93	1.04	1.23	0.88	1.42	1.50	2.90	1.45


NOTE: Reducing Cross with variation in the tube sizes are available. The tube sizes are designated in the order given below.



The tube sizes are indicated in the part number in the same order above.

# Bulkhead Union N2700-LN

**Tube x Tube**

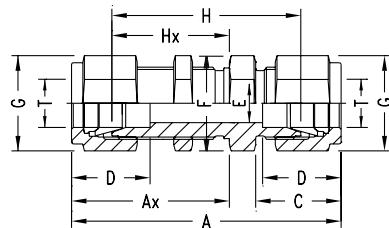


Part No.	T Tube OD	A	Ax	C	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
N2700-LN-01-01	1/16	1.24	0.68	0.43	0.34	0.05	0.31	0.31	0.94	0.53	0.20	0.12
N2700-LN-02-02	1/8	2.02	1.23	0.60	0.50	0.09	0.43	0.43	1.50	0.97	0.33	0.50
N2700-LN-04-04	1/4	2.27	1.32	0.70	0.60	0.19	0.63	0.56	1.69	1.03	0.45	0.40
N2700-LN-05-05	5/16	2.39	1.41	0.73	0.64	0.25	0.67	0.63	1.81	1.12	0.51	0.44
N2700-LN-06-06	3/8	2.45	1.45	0.76	0.66	0.28	0.75	0.67	1.87	1.16	0.57	0.44
N2700-LN-08-08	1/2	2.80	1.65	0.86	0.90	0.41	0.94	0.87	2.00	1.25	0.77	0.50
N2700-LN-10-10	5/8	2.86	1.68	0.86	0.96	0.50	1.06	0.98	2.06	1.28	0.89	0.50
N2700-LN-12-12	3/4	3.11	1.87	0.86	0.96	0.63	1.18	1.12	2.31	1.47	1.02	0.66
N2700-LN-16-16	1	3.77	2.26	1.04	1.23	0.88	1.42	1.50	2.81	1.78	1.33	0.75
N2700-LN-20-20	1-1/4	4.85	2.75	1.53	1.62	1.09	1.97	1.97	3.11	1.88	1.64	0.75
N2700-LN-24-24	1-1/2	5.48	3.01	1.78	1.97	1.34	2.36	2.24	3.34	1.94	1.95	0.75
N2700-LN-32-32	2	7.10	3.69	2.47	2.66	1.81	2.76	3.00	4.16	2.22	2.64	0.75

# Double-Ferrule Tube Fittings

## Bulkhead Reducing Union N2700-LN


Tube X Tube

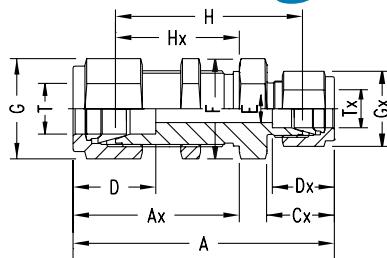

Part No.	T Tube OD	Tx Tube OD	A	Ax	Cx	D	Dx	E min.	F A/F	G A/F	Gx A/F	Panel Hole H	Max. Hole Size Hx	Panel Drill Size	Panel Thickness
N2700-LN-04-02	1/4	1/8	2.17	1.32	0.60	0.60	0.50	0.09	0.63	0.63	0.43	1.62	1.03	0.45	0.40
N2700-LN-06-04	3/8	1/4	2.39	1.44	0.70	0.66	0.60	0.19	0.75	0.67	0.56	1.81	1.16	0.57	0.44
N2700-LN-08-04	1/2	1/4	2.63	1.65	0.70	0.90	0.60	0.19	0.94	0.87	0.56	1.94	1.25	0.77	0.50
N2700-LN-08-06	1/2	3/8	2.63	1.65	0.70	0.88	0.66	0.28	0.94	0.87	0.67	2.00	1.25	0.77	0.50

## Bulkhead Union Elbow N2701-LN


Tube X 90° Tube

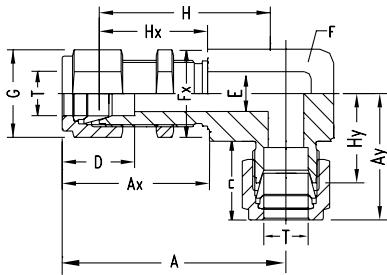

Part No.	T Tube OD	A	Ax	Ay	C	D	E min.	F A/F	G A/F	H	Hx	Hy	Panel Hole Drill Size	Max. Panel Thickness
N2701-LN-02-02	1/8	1.70	1.23	0.88	0.60	0.50	0.09	0.43	0.43	1.44	0.97	0.62	0.33	0.50
N2701-LN-04-04	1/4	1.93	1.32	1.06	0.70	0.60	0.19	0.63	0.56	1.63	1.03	0.77	0.45	0.40
N2701-LN-06-06	3/8	2.13	1.45	1.20	0.76	0.66	0.28	0.87	0.67	1.84	1.16	0.91	0.57	0.44
N2701-LN-08-08	1/2	2.50	1.65	1.42	0.86	0.90	0.41	0.94	0.87	2.10	1.25	1.02	0.77	0.50
N2701-LN-12-12	3/4	2.96	1.87	1.57	0.86	0.96	0.63	1.18	1.12	2.57	1.47	1.17	1.02	0.66
N2701-LN-16-16	1	3.61	2.26	1.93	1.04	1.23	0.88	1.42	1.50	3.13	1.78	1.45	1.33	0.75

## Bulkhead Female Connector N2705-LN

Tube x Female NPT Threads

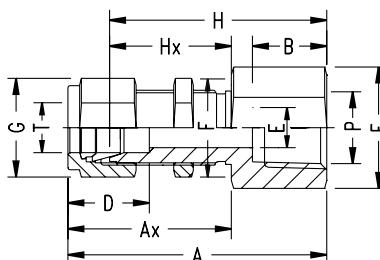


Part No.	T Tube OD	P NPT Female	A	Ax	B	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
N2705-LN-02-02	1/8	1/8	1.76	1.23	0.41	0.50	0.09	0.55	0.43	1.50	0.97	0.33	0.50
N2705-LN-04-02	1/4	1/8	1.85	1.32	0.41	0.60	0.19	0.63	0.56	1.56	1.03	0.45	0.40
N2705-LN-04-04	1/4	1/4	2.04	1.32	0.59	0.60	0.19	0.75	0.56	1.75	1.03	0.45	0.40
N2705-LN-06-04	3/8	1/4	2.17	1.45	0.59	0.66	0.28	0.75	0.67	1.88	1.16	0.58	0.44
N2705-LN-08-06	1/2	3/8	2.43	1.65	0.59	0.90	0.41	0.87	0.87	2.03	1.25	0.77	0.50
N2705-LN-08-08	1/2	1/2	2.62	1.65	0.78	0.90	0.41	1.06	0.87	2.22	1.25	0.77	0.50
N2705-LN-10-08	5/8	1/2	2.66	1.68	0.78	0.90	0.50	1.06	0.98	2.26	1.28	0.89	0.50
N2705-LN-12-08	3/4	1/2	2.85	1.87	0.78	0.96	0.63	1.42	1.12	2.45	1.47	1.02	0.66
N2705-LN-12-12	3/4	3/4	2.94	1.87	0.81	0.96	0.63	1.42	1.12	2.53	1.47	1.02	0.66
N2705-LN-16-12	1	3/4	3.32	2.26	0.81	1.23	0.63	1.42	1.50	2.84	1.78	1.33	0.75
N2705-LN-16-16	1	1	3.67	2.26	1.00	1.23	0.88	1.61	1.50	3.19	1.78	1.33	0.75
N2705-LN-20-20	1-1/4	1-1/4	4.16	2.75	1.00	1.62	1.09	1.97	1.97	3.29	1.88	1.64	0.75
N2705-LN-24-24	1-1/2	1-1/2	4.51	3.01	1.09	1.97	1.34	2.36	2.24	3.44	1.94	1.95	0.75

B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

## Bulkhead Male Connector N2706-LN


Tube x Male NPT Threads

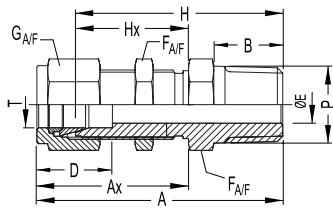

Part No.	T Tube OD	P NPT Male	A	Ax	B	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
N2706-LN-02-02	1/8	1/8	1.83	1.23	0.38	0.50	0.09	0.56	0.43	1.57	0.97	0.33	0.50
N2706-LN-04-02	1/4	1/8	1.95	1.32	0.38	0.60	0.19	0.63	0.56	1.66	1.03	0.45	0.40
N2706-LN-04-04	1/4	1/4	2.13	1.32	0.56	0.60	0.19	0.63	0.56	1.84	1.03	0.45	0.40
N2706-LN-06-06	3/8	1/4	2.26	1.45	0.56	0.66	0.28	0.75	0.67	1.97	1.16	0.58	0.44
N2706-LN-06-06	3/8	3/8	2.26	1.45	0.56	0.66	0.28	0.75	0.67	1.97	1.16	0.58	0.44
N2706-LN-08-08	3/8	1/2	2.51	1.45	0.75	0.66	0.28	0.87	0.67	2.22	1.16	0.58	0.44
N2706-LN-08-06	1/2	3/8	2.49	1.65	0.56	0.90	0.38	0.94	0.87	2.09	1.25	0.77	0.50
N2706-LN-08-08	1/2	1/2	2.71	1.65	0.75	0.90	0.41	0.94	0.87	2.31	1.25	0.77	0.50
N2706-LN-12-12	3/4	3/4	3.00	1.87	0.75	0.96	0.62	1.18	1.12	2.60	1.47	1.02	0.66
N2706-LN-16-16	1	1	3.67	2.26	0.94	1.23	0.88	1.61	1.50	3.19	1.78	1.33	0.75
N2706-LN-20-20	1-1/4	1-1/4	4.35	2.85	0.94	1.62	1.09	1.97	1.97	3.44	1.95	1.67	0.75
N2706-LN-24-24	1-1/2	1-1/2	4.83	3.11	1.03	1.97	1.34	2.36	2.24	3.76	2.03	1.99	0.75

## Bulkhead Male JIC Connector N2707-LN

Tube x Male JIC

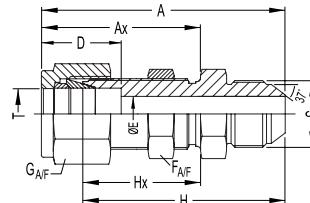


Part No.	T Tube OD	S SAE/MS Male	A	Ax	D	E min.	F A/F	G A/F	H	Hx	Panel Hole Drill Size	Max. Panel Thickness
N2707-LN-04-04	1/4	1/4	2.12	1.32	0.60	0.17	0.63	0.55	1.83	1.03	0.45	0.40
N2707-LN-06-06	3/8	3/8	2.25	1.45	0.66	0.28	0.75	0.67	1.96	1.16	0.58	0.44
N2707-LN-08-08	1/2	1/2	2.59	1.65	0.90	0.39	0.94	0.87	2.19	1.25	0.77	0.50
N2707-LN-12-12	3/4	3/4	3.11	1.87	0.96	0.61	1.18	1.06	2.71	1.47	1.02	0.66
N2707-LN-16-16	1	1	3.64	2.26	1.23	0.84	1.61	1.42	3.16	1.78	1.33	0.75

# Double-Ferrule Tube Fittings

## Bulkhead Reducer N2709-LN


Tube x Machined Tube Stub

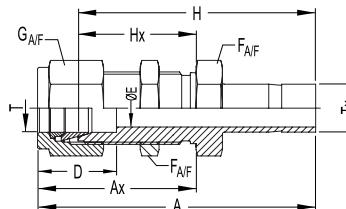

Part No.	T Tube OD	Tx Tube OD	A	Ax	D	E min.	F A/F	G A/F	H D	Hx	Panel Hole Drill Size	Max. Panel Thickness
N2709-LN-02-02	1/8	1/8	1.95	1.23	0.50	0.08	0.43	0.43	1.69	0.97	0.33	0.50
N2709-LN-04-04	1/4	1/4	2.20	1.32	0.60	0.19	0.63	0.56	1.91	1.03	0.45	0.40
N2709-LN-06-06	3/8	3/8	2.41	1.45	0.66	0.28	0.75	0.67	2.12	1.16	0.58	0.44
N2709-LN-08-08	1/2	1/2	2.87	1.65	0.90	0.39	0.94	0.87	2.47	1.25	0.77	0.50
N2709-LN-10-10	5/8	5/8	2.96	1.68	0.96	0.50	1.06	0.98	2.56	1.28	0.89	0.50
N2709-LN-16-16	1	1	3.95	2.26	1.23	0.80	1.42	1.50	3.47	1.78	1.33	0.75
N2709-LN-20-20	1-1/4	1-1/4	4.75	2.75	1.62	1.08	1.97	1.97	3.54	1.88	1.64	0.75
N2709-LN-24-24	1-1/2	1-1/2	5.01	3.01	1.97	1.30	2.36	2.36	3.94	1.94	1.95	0.75

## O Seal Male Connector N6400

Tube x Male MORB Straight Threads

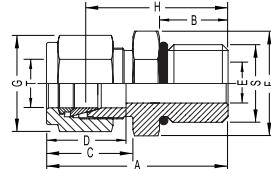


Part No.	T Tube OD	S-SAE/MS Thread	A	B	C	D	E min.	F A/F	G A/F	H	O Ring* Part No.
N6400-02-02-0	1/8	5/16-24	1.18	0.30	0.60	0.50	0.09	0.44	0.44	0.92	4001-02
N6400-04-04-0	1/4	7/16-20	1.34	0.36	0.70	0.60	0.19	0.56	0.56	1.05	4001-04
N6400-04-06-0	1/4	9/16-18	1.40	0.39	0.70	0.60	0.19	0.69	0.56	1.11	4001-06
N6400-04-08-0	1/4	3/4-16	1.48	0.44	0.70	0.60	0.19	0.88	0.56	1.19	4001-08
N6400-04-10-0	1/4	7/8-14	1.60	0.50	0.70	0.60	0.19	1.00	0.56	1.31	4001-10
N6400-05-05-0	5/16	1/2-20	1.37	0.36	0.73	0.64	0.25	0.63	0.63	1.08	4001-05
N6400-06-04-0	3/8	7/16-20	1.40	0.36	0.76	0.66	0.20	0.63	0.69	1.11	4001-04
N6400-06-06-0	3/8	9/16-18	1.46	0.39	0.76	0.66	0.28	0.67	0.67	1.17	4001-06
N6400-06-08-0	3/8	3/4-16	1.54	0.44	0.76	0.66	0.28	0.88	0.69	1.25	4001-08
N6400-06-10-0	3/8	7/8-14	1.66	0.50	0.76	0.66	0.28	1.00	0.69	1.37	4001-10
N6400-08-06-0	1/2	9/16-18	1.54	0.39	0.86	0.90	0.28	0.81	0.88	1.14	4001-06
N6400-08-08-0	1/2	3/4-16	1.65	0.44	0.86	0.90	0.41	0.87	0.87	1.25	4001-08
N6400-08-10-0	1/2	7/8-14	1.77	0.50	0.86	0.90	0.41	1.00	0.88	1.37	4001-10
N6400-08-12-0	1/2	1-1/16-12	1.93	0.59	0.86	0.90	0.41	1.25	0.88	1.53	4001-12
N6400-10-08-0	5/8	3/4-16	1.65	0.44	0.86	0.96	0.42	0.94	1.00	1.25	4001-08
N6400-10-10-0	5/8	7/8-14	1.78	0.50	0.86	0.96	0.50	1.00	1.00	1.38	4001-10
N6400-12-08-0	3/4	3/4-16	1.81	0.44	0.86	0.96	0.42	1.06	1.13	1.41	4001-08
N6400-12-12-0	3/4	1-1/16-12	1.93	0.59	0.86	0.96	0.62	1.26	1.12	1.53	4001-12
N6400-14-14-0	7/8	1-3/16-12	1.93	0.59	0.86	1.02	0.72	1.38	1.25	1.53	4001-14
N6400-16-12-0	1	1-1/16-12	2.10	0.59	1.04	1.23	0.66	1.38	1.50	1.62	4001-12
N6400-16-16-0	1	1-5/16-12	2.14	0.59	1.04	1.23	0.88	1.50	1.50	1.66	4001-16

\*Standard Brennan Instrumentation O-Rings are black Viton.

## 90° Positionable Male Elbow N6801

Tube X Male SAE Straight Threads

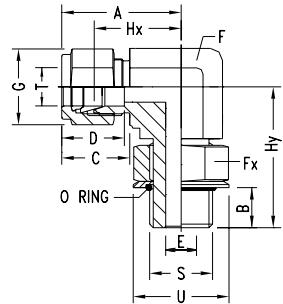


Part No.	T Tube OD	Tube SAE/MS Thread	Ax	B	C	D	E min.	F	Fx A/F	G A/F	Hx	Hy	U	O Ring* Part No.
N6801-04-04-NWO	1/4	7/16-20	28.5	9.9	17.8	15.3	4.8	14	14	14	21.0	28.5	16.5	4001-04
N6801-04-06-NWO	1/4	9/16-18	30.5	11.2	17.8	15.3	4.8	16	17	14	23.1	32.3	20.0	4001-06
N6801-06-06-NWO	3/8	9/16-18	32.0	11.2	19.3	16.8	7.1	16	17	17	24.6	32.3	20.0	4001-06
N6801-06-08-NWO	3/8	3/4-16	34.8	12.7	19.3	16.8	7.1	22	22	17	27.4	37.8	25.6	4001-08
N6801-08-08-NWO	1/2	3/4-16	37.6	12.7	21.8	22.9	10.4	22	22	22	27.4	37.8	25.6	4001-08
N6801-10-10-NWO	5/8	7/8-14	39.6	14.3	21.8	24.4	12.7	24	25	25	29.5	43.4	29.5	4001-10
N6801-12-12-NWO	3/4	1-1/16-12	41.4	16.8	21.8	24.4	15.8	27	32	28.5	31.2	48.8	36.6	4001-12
N6801-14-14-NWO	7/8	1-1/16-12	43.2	16.8	21.8	25.9	18.3	30	32	32	33	50.5	40.4	4001-14
N6801-16-16-NWO	1	1-5/16-12	50.5	16.8	26.4	31.2	22.3	35	35	38	38.4	53.6	44.0	4001-16
N6801-20-20-NWO	1-1/4	1-5/8-12	67.8	16.8	38.9	41.2	27.6	46	50	50	45.7	58.2	54.9	4001-20
N6801-24-24-NWO	1-1/2	1-7/8-12	78.0	16.8	45.2	50.0	34.0	50	55	60	50.8	60.4	62.5	4001-24

\*Standard Brennan Instrumentation O-Rings are black Viton.

## 45° Positionable Male Elbow N6802

Tube X Male SAE Straight Threads

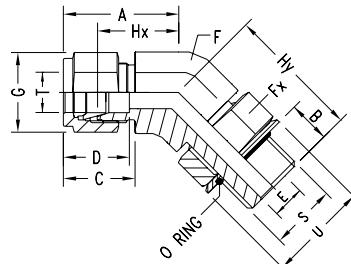


Part No.	T Tube OD	P SAE/MS Male	A	B	C	D	E min.	F	Fx A/F	G A/F	Hx	Hy	U	O Ring* Part No.
N6802-04-04-NWO	1/4	7/16-20	1.01	0.39	0.70	0.60	0.19	0.55	0.56	0.56	0.72	1.01	0.65	4001-04
N6802-06-06-NWO	3/8	9/16-18	1.10	0.44	0.76	0.66	0.28	0.63	0.67	0.67	0.81	1.11	0.79	4001-06
N6802-08-08-NWO	1/2	3/4-16	1.26	0.50	0.86	0.90	0.41	0.87	0.87	0.87	0.86	1.27	1.01	4001-08
N6802-12-12-NWO	3/4	1-1/16-12	1.57	0.66	0.86	0.96	0.62	1.06	1.26	1.12	1.17	1.86	1.44	4001-12
N6802-16-16-NWO	1	1-5/16-12	1.87	0.66	1.04	1.23	0.88	1.42	1.50	1.50	1.39	1.99	1.73	4001-16

\*Standard Brennan Instrumentation O-Rings are black Viton.

# Double-Ferrule Tube Fittings

## Positionable Male Branch Tee N6803

Tube x Tube x Male SAE Straight Threads

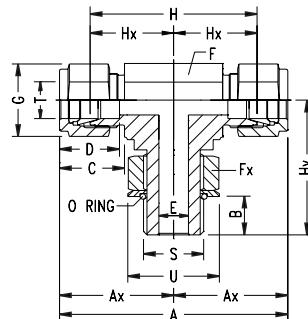


Part No.	T	S	SAE/MS	Tube OD	Male	A	Ax	B	C	D	E min.	F	Fx	G	O Ring*
												A/F	A/F	A/F	Part No.
N6803-04-04-NWO	1/4	7/16-20	2.24	1.12	0.39	0.70	0.60	0.19	0.55	0.55	0.56	1.65	0.83	1.12	4001-04
N6803-06-06-NWO	3/8	9/16-18	2.52	1.26	0.44	0.76	0.66	0.28	0.67	0.67	0.67	1.94	0.97	1.27	4001-06
N6803-08-08-NWO	1/2	3/4-16	2.96	1.48	0.50	0.86	0.90	0.41	0.87	0.87	0.87	2.16	1.08	1.49	4001-08
N6803-12-12-12-NWO	3/4	1-1/16-12	3.26	1.63	0.66	0.86	0.96	0.62	1.06	1.26	1.12	2.46	1.23	1.92	4001-12
N6803-16-16-16-NWO	1	1-5/16-12	3.98	1.99	0.66	1.04	1.23	0.88	1.38	1.38	1.50	3.02	1.51	2.11	4001-16
N6803-20-20-20-NWO	1-1/4	1-5/8-12	5.34	2.67	0.66	1.53	1.62	1.09	1.81	1.97	1.97	3.60	1.80	2.28	4001-20
N6803-24-24-24-NWO	1-1/2	1-7/8-12	6.14	3.07	0.66	1.78	1.97	1.34	1.97	2.17	2.36	4.00	2.00	2.38	4001-24

\*Standard Brennan Instrumentation O-Rings are black Viton.

## Positionable Male Run Tee N6804

Tube x Male SAE Straight Threads x Tube

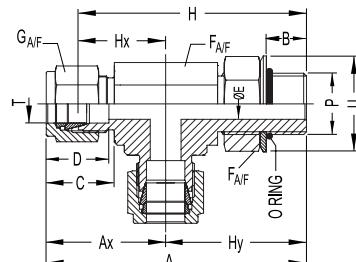


Part No.	T	S	SAE/MS	Tube OD	Male	A	Ax	B	C	D	E min.	F	Fx	G	O Ring*
												A/F	A/F	A/F	Part No.
N6804-04-04-NWO	1/4	7/16-20	2.24	1.12	0.39	0.70	0.60	0.19	0.55	0.56	0.56	1.95	0.83	1.12	4001-04
N6804-06-06-NWO	3/8	9/16-18	2.53	1.26	0.44	0.76	0.66	0.28	0.67	0.67	0.67	2.24	0.97	1.27	4001-06
N6804-08-08-NWO	1/2	3/4-12	2.97	1.48	0.50	0.86	0.90	0.41	0.87	0.87	0.87	2.57	1.08	1.49	4001-08
N6804-12-12-12-NWO	3/4	1-1/16-12	3.55	1.63	0.66	0.86	0.96	0.62	1.06	1.26	1.12	3.15	1.23	1.92	4001-12
N6804-16-16-16-NWO	1	1-5/16-12	4.10	1.99	0.66	1.04	1.23	0.88	1.42	1.42	1.50	3.62	1.51	2.11	4001-16
N6804-20-20-20-NWO	1-1/4	1-5/8-12	4.96	2.67	0.66	1.53	1.62	1.09	1.81	1.97	1.97	4.09	1.80	2.29	4001-20
N6804-24-24-24-NWO	1-1/2	1-7/8-12	5.45	3.07	0.66	1.78	1.97	1.34	1.97	2.17	2.36	4.38	2.00	2.38	4001-24

\*Standard Brennan Instrumentation O-Rings are black Viton.

# BSPT Male Connector N7000


Tube x Male BSPT Threads

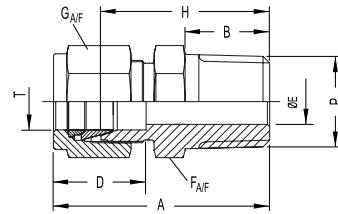

Part No.	T Tube OD	P ISO Male	A	B	C	D	E min.	F A/F	G A/F	H
N7000-02-02	1/8	1/8	1.20	0.38	0.60	0.50	0.09	0.43	0.43	0.94
N7000-02-04	1/8	1/4	1.40	0.56	0.60	0.50	0.09	0.56	0.43	1.14
N7000-04-02	1/4	1/8	1.29	0.38	0.70	0.60	0.19	0.56	0.56	1.00
N7000-04-04	1/4	1/4	1.49	0.56	0.70	0.60	0.19	0.56	0.56	1.20
N7000-04-06	1/4	3/8	1.51	0.56	0.70	0.60	0.19	0.75	0.56	1.22
N7000-04-08	1/4	1/2	1.76	0.75	0.70	0.60	0.19	0.87	0.56	1.47
N7000-06-02	3/8	1/8	1.39	0.38	0.76	0.66	0.19	0.63	0.67	1.10
N7000-06-04	3/8	1/4	1.57	0.56	0.76	0.66	0.28	0.63	0.67	1.28
N7000-06-06	3/8	3/8	1.57	0.56	0.76	0.66	0.28	0.75	0.67	1.28
N7000-06-08	3/8	1/2	1.82	0.75	0.76	0.66	0.28	0.87	0.67	1.53
N7000-08-04	1/2	1/4	1.71	0.56	0.86	0.90	0.28	0.81	0.87	1.31
N7000-08-06	1/2	3/8	1.71	0.56	0.86	0.90	0.38	0.81	0.87	1.31
N7000-08-08	1/2	1/2	1.93	0.75	0.86	0.90	0.41	0.87	0.87	1.53
N7000-12-12	3/4	3/4	1.99	0.75	0.86	0.96	0.62	1.06	1.12	1.59
N7000-16-16	1	1	2.45	0.94	1.04	1.23	0.88	1.42	1.50	1.97
N7000-20-16	1-1/4	1	3.04	0.94	1.53	1.62	0.88	1.81	1.97	2.17
N7000-20-20	1-1/4	1-1/4	3.04	0.94	1.53	1.62	1.09	1.81	1.97	2.17
N7000-24-24	1-1/2	1-1/2	3.50	1.03	1.78	1.97	1.34	2.17	2.24	2.43

# BSPP Male Connector N7002

Tube X Male BSPP Threads

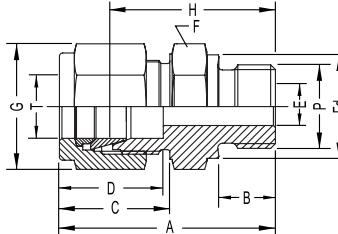

Part No.	T Tube O.D.	P ISO Male	A	B	C	D	E (min.)	F A/F	Fd	G A/F	H
N7002-02-02	1/8	1/8	1.18	0.28	0.60	0.50	0.09	0.56	0.54	0.43	0.92
N7002-02-04	1/8	1/4	1.39	0.44	0.60	0.50	0.09	0.75	0.71	0.43	1.13
N7002-04-02	1/4	1/8	1.27	0.28	0.70	0.60	0.19	0.56	0.54	0.56	0.98
N7002-04-04	1/4	1/4	1.48	0.44	0.70	0.60	0.19	0.75	0.71	0.56	1.19
N7002-06-04	3/8	1/4	1.54	0.44	0.76	0.66	0.23	0.75	0.71	0.67	1.25
N7002-06-06	3/8	3/8	1.59	0.44	0.76	0.66	0.28	0.87	0.86	0.67	1.30
N7002-06-08	3/8	1/2	1.82	0.56	0.76	0.66	0.28	1.06	1.02	0.67	1.53
N7002-08-04	1/2	1/4	1.68	0.44	0.86	0.90	0.23	0.83	0.71	0.87	1.28
N7002-08-06	1/2	3/8	1.70	0.44	0.86	0.90	0.31	0.87	0.86	0.87	1.30
N7002-08-08	1/2	1/2	1.93	0.56	0.86	0.90	0.41	1.06	1.02	0.87	1.53
N7002-08-12	1/2	3/4	2.08	0.62	0.86	0.90	0.41	1.42	1.26	0.87	1.68
N7002-10-08	5/8	1/2	1.98	0.56	0.86	0.96	0.47	1.26	1.25	0.87	1.59
N7002-12-08	3/4	1/2	1.93	0.56	0.86	0.96	0.47	1.06	1.02	1.12	1.53
N7002-12-12	3/4	3/4	2.08	0.62	0.86	0.96	0.62	1.42	1.26	1.12	1.68
N7002-12-16	3/4	1	2.18	0.72	0.86	0.96	0.62	1.61	1.54	1.12	1.80
N7002-16-08	1	1/2	2.20	0.56	1.04	1.23	0.47	1.42	1.02	1.50	1.72
N7002-16-12	1	3/4	2.26	0.62	1.04	1.23	0.62	1.42	1.26	1.50	1.78
N7002-16-16	1	1	2.36	0.72	1.04	1.23	0.78	1.61	1.54	1.50	1.88
N7002-20-20	1-1/4	1-1/4	3.11	0.78	1.53	1.62	0.98	1.97	1.93	1.97	2.20
N7002-24-24	1-1/2	1-1/2	3.57	0.87	1.78	1.97	1.25	2.36	2.15	2.24	2.49


Parallel Threads Are As Per Iso-228 Part-1

#Groove Is As Per Din 3852 Form-'G'

# Double-Ferrule Tube Fittings

## BSPP Positionable Male Elbow N7202

Tube x Male BSPP Threads

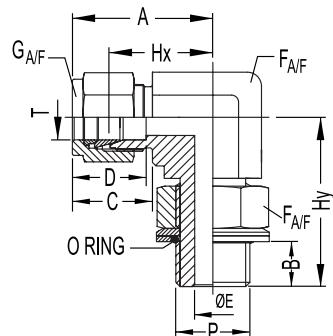

Part No.	Tube OD	PISO Male	A	B	C	D	E min.	F	Fx A/F	G A/F	Hx	Hy	U
N7202-04-02	1/4	1/8	1.06	0.32	0.70	0.60	0.16	0.55	0.56	0.56	0.77	1.04	0.68
N7202-04-04	1/4	1/4	1.14	0.36	0.70	0.60	0.19	0.63	0.75	0.56	0.85	1.27	0.90
N7202-06-04	3/8	1/4	1.20	0.36	0.76	0.66	0.23	0.63	0.75	0.67	0.91	1.27	0.90
N7202-06-06	3/8	3/8	1.31	0.36	0.76	0.66	0.28	0.87	0.87	0.67	1.02	1.46	1.04
N7202-08-04	1/2	1/4	1.42	0.36	0.86	0.90	0.23	0.81	0.75	0.87	1.02	1.38	0.90
N7202-08-06	1/2	3/8	1.42	0.37	0.86	0.90	0.31	0.87	0.87	0.87	1.02	1.46	1.04
N7202-08-08	1/2	1/2	1.50	0.51	0.86	0.96	0.41	0.94	1.06	0.87	1.10	1.71	1.26
N7202-10-08	5/8	1/2	1.50	0.51	0.86	0.96	0.41	0.94	1.06	0.98	1.10	1.71	1.26
N7202-12-08	3/4	1/2	1.57	0.51	0.86	0.96	0.41	1.06	1.06	1.12	1.17	1.78	1.26
N7202-12-12	3/4	3/4	1.57	0.51	0.86	0.96	0.62	1.06	1.42	1.12	1.17	1.92	1.62
N7202-16-12	1	3/4	1.93	0.51	1.04	1.23	0.62	1.42	1.42	1.50	1.45	2.10	1.62
N7202-16-16	1	1	1.93	0.55	1.04	1.23	0.78	1.42	1.61	1.50	1.45	2.11	1.91

# Single-Ferrule Fittings

Brennan Industries offers both double-ferrule and single-ferrule tube fittings. While the double-ferrule design is more popular, there are situations where single-ferrule fittings are preferred.

## No backward ferrules

One ferrule means one direction. If the ferrule has been installed backward, it would be obvious right away.

## No missing ferrules

If the ferrule has not been installed, it would be easy to see that it is missing. With single-ferrule fittings, there is less chance for an incorrect assembly.

## No changing the entire facility

Some facilities have been built using only single-ferrule fittings. In such cases, Brennan now gives you the option to continue using the single-ferrule design if that is what you want or require. That means you don't have to change all of the fittings throughout the facility to double-ferrule designs.

## Better vibration performance

In some instances where there is a higher degree of vibration or pulsation, single-ferrule designs are preferred over double-ferrule fittings. Some users feel that the single-ferrule design performs better in such applications.



## Ordering Codes

EXAMPLE

**NS2404-04-04-SS**

**Fitting Type**  
(Male Connector)

**Tube O.D.**  
in sixteenths  
of an inch  
1/4" O.D.

**Pipe Size**  
in sixteenths  
of an inch  
1/4" NPT

**Material**  
SS = stainless steel, type 316  
B = brass

- NS (S stands for single ferrule) is the part number prefix.
- The largest tube end size is first. The smaller tube end or pipe thread size follows.
- Additional fitting materials and thread specifications are available upon request.

NOTE: No suffix is required for Carbon Steel fittings.

B R E N N A N I N D U S T R I E S


Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

# Instrumentation Valves

Brennan manufactures a wide range of valves and manifolds used in conjunction with fittings for specialized applications in instrumentation, oil and gas installations, steam and gas turbines, low temperature gas and liquid gas systems and fine gas.

**Products – Valves:**  
Needle, Shut-Off, Check, Flow Control, Ball, Plug, etc.

**Products – Manifolds:**  
For Pressure and Differential Pressure Instruments widely used in the instrumentation field

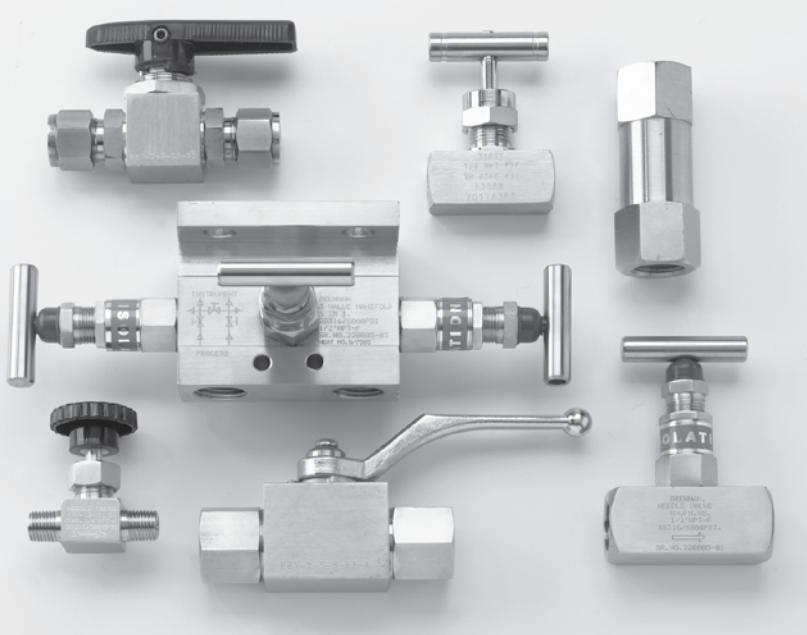

## Brennan's Standard Valve Product Range Includes:

### ■ Needle Valves (NVN Series)

Brennan offers a comprehensive range of Needle Valves. Our range includes both Integral Bonnet and Screwed Bonnet designs. These Needle Valves are available with a variety of end connections covering screwed male/female pipe ends and tube ends, which conform to both single and double-ferrule designs.

#### Some unique features of our Needle Valves are:

- A swiveling, non-rotating plug which prevents body leakage and ensures positive aligned seating for repeat operations.
- Thread above the gland seal which ensures that threads are not left wet by the media.
- Hardened plugs which prevent indentation of the plug and guarantees long life.

### ■ Ball Valves (NVB Series)

Brennan offers a wide range of Ball Valves which are available in two, three and four-way designs. These Ball Valves are available with a variety of end connections (screwed ends, single ferrule, double ferrule).

Brennan's Instrumentation Ball Valves for switching service are suitable for panel mounting. They are used in two-way as well as three-way designs with bottom entry and other outlet ports in the same plane. Their compact design is ideal for applications that require minimum carry-over fluid when switching from one port to another. These valves are also used for both static and vehicular CNG applications.

### ■ Check Valves (NVC Series)

Brennan's range of Check Valves is equipped with a unique sealing arrangement that transmits pressure directly to the body and provides for zero leakage over long-life operations. The Non-Return range of Check Valves is suitable for pressures up to 4,300 psi and is available with a variety of ends.

**To place an order or receive a Brennan Instrumentation valve quote, simply provide Brennan with a drawing, "cut sheet" or a part number from your current supplier and let Brennan do the rest!**

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N0304-01	IN PLUG	100-P	1 FNZ	1BLP1	DBA 1	1P	7121L-1/16-1/16	CPA-1	1-DF PLUG
N0304-02	IN PLUG	200-P	2 FNZ	2BLP2	DBA 2	2P	7121L-1/8-1/8	CPA-2	2-DF PLUG
N0304-03	IN PLUG	300-P	3 FNZ	3BLP3	DBA 3	3P	7121L-3/16-3/16	CPA-3	3-DF PLUG
N0304-04	IN PLUG	400-P	4 FNZ	4BLP4	DBA 4	4P	7121L-1/4-1/4	CPA-4	4-DF PLUG
N0304-05	IN PLUG	500-P	5 FNZ	5BLP5	DBA 5	5P	7121L-5/16-5/16	CPA-5	5-DF PLUG
N0304-06	IN PLUG	600-P	6 FNZ	6BLP6	DBA 6	6P	7121L-3/8-3/8	CPA-6	6-DF PLUG
N0304-08	IN PLUG	810-P	8 FNZ	8BLP8	DBA 8	8P	7121L-1/2-1/2	CPA-8	8-DF PLUG
N0304-10	IN PLUG	1010-P	10 FNZ	10BLP10	DBA 10	10P	7121L-5/8-5/8	CPA-10	10-DF PLUG
N0304-12	IN PLUG	1210-P	12 FNZ	12BLP12	DBA 12	12P	7121L-3/4-3/4	CPA-12	12-DF PLUG
N0304-14	IN PLUG	1410-P	14 FNZ	14BLP14	DBA 14	14P	7121L-7/8-7/8	CPA-14	14-DF PLUG
N0304-16	IN PLUG	1610-P	16 FNZ	16BLP16	DBA 16	16P	7121L-1-1	CPA-16	16-DF PLUG
N0304-20	IN PLUG	2000-P	20 FNZ	20BLP20	DBA 20	20P	7121L-1-1/4-1-1/4	CPA-20	20-DF PLUG
N0304-24	IN PLUG	2400-P	24 FNZ	24BLP24	DBA 24	24P	7121L-1-1/2-1-1/2	CPA-24	24-DF PLUG
N0304-32	IN PLUG	3200-P	32 FNZ	32BLP32	DBA 32	32P	7121L-2-2	CPA-32	32-DF PLUG
N0318-01	IN NUT	102-1	1 BZ	1NU1	DNA 1	1N	761L-1/16	CN-1	DN-1
N0318-02	IN NUT	202-1	2 BZ	2NU2	DNA 2	2N	761L-1/8	CN-2	DN-2
N0318-03	IN NUT	302-1	3 BZ	3NU3	DNA 3	3N	761L-3/16	CN-3	DN-3
N0318-04	IN NUT	402-1	4 BZ	4NU4	DNA 4	4N	761L-1/4	CN-4	DN-4
N0318-05	IN NUT	502-1	5 BZ	5NU5	DNA 5	5N	761L-5/16	CN-5	DN-5
N0318-06	IN NUT	602-1	6 BZ	6NU6	DNA 6	6N	761L-3/8	CN-6	DN-6
N0318-08	IN NUT	812-1	8 BZ	8NU8	DNA 8	8N	761L-1/2	CN-8	DN-8
N0318-10	IN NUT	1012-1	10 BZ	10NU10	DNA 10	10N	761L-5/8	CN-10	DN-10
N0318-12	IN NUT	1212-1	12 BZ	12NU12	DNA 12	12N	761L-3/4	CN-12	DN-12
N0318-14	IN NUT	1412-1	14 BZ	14NU14	DNA 14	14N	761L-7/8	CN-14	DN-14
N0318-16	IN NUT	1612-1	16 BZ	16NU16	DNA 16	16N	761L-1	CN-16	DN-16
N0318-20	IN NUT	2002-1	20 BZ	20NU20	DNA 20	20N	761L-1-1/4	CN-20	DN-20
N0318-24	IN NUT	2402-1	24 BZ	24NU24	DNA 24	24N	761L-1-1/2	CN-24	DN-24
N0318-32	IN NUT	3202-1	32 BZ	32NU32	DNA 32	32N	761L-2	CN-32	DN-32
N0319-B-01	BACK FERRULE	104-1	N/A#	1BF1	DOB 1	1FR	760LB-1/16-1/16	CFB-1	DRC-1
N0319-B-02	BACK FERRULE	204-1	N/A#	2BF2	DOB 2	2FR	760LB-1/8-1/8	CFB-2	DRC-2
N0319-B-03	BACK FERRULE	304-1	N/A#	3BF3	DOB 3	3FR	760LB-3/16-3/16	CFB-3	DRC-32
N0319-B-04	BACK FERRULE	404-1	N/A#	4BF4	DOB 4	4FR	760LB-1/4-1/4	CFB-4	DRC-4
N0319-B-05	BACK FERRULE	504-1	N/A#	5BF5	DOB 5	5FR	760LB-5/16-5/16	CFB-5	DRC-5
N0319-B-06	BACK FERRULE	604-1	N/A#	6BF6	DOB 6	6FR	760LB-3/8-3/8	CFB-6	DRC-6
N0319-B-08	BACK FERRULE	814-1	N/A#	8BF8	DOB 8	8FR	760LB-1/2-1/2	CFB-8	DRC-8
N0319-B-10	BACK FERRULE	1014-1	N/A#	10BF10	DOB 10	10FR	760LB-5/8-5/8	CFB-10	DRC-10
N0319-B-12	BACK FERRULE	1214-1	N/A#	12BF12	DOB 12	12FR	760LB-3/4-3/4	CFB-12	DRC-12
N0319-B-14	BACK FERRULE	1414-1	N/A#	14BF14	DOB 14	14FR	760LB-7/8-7/8	CFB-14	DRC-14
N0319-B-16	BACK FERRULE	1614-1	N/A#	16BF16	DOB 16	16FR	760LB-1-1	CFB-16	DRC-16
N0319-B-20	BACK FERRULE	2004-1	N/A#	20BF20	DOB 20	20FR	760LB-1-1/4-1-1/4	CFB-20	DRC-20
N0319-B-24	BACK FERRULE	2404-1	N/A#	24BF24	DOB 24	24FR	760LB-1-2-1/2-1/2	CFB-24	DRC-24
N0319-B-32	BACK FERRULE	3204-1	N/A#	32BF32	DOB 32	32FR	760LB-2-2	CFB-32	DRC-32
N0319-F-01	FRONT FERRULE	103-1	N/A#	1FF1	DOF 1	1FF	760LF-1/16-1/16	CFF-1	DFC-1
N0319-F-02	FRONT FERRULE	203-1	N/A#	2FF2	DOF 2	2FF	760LF-1/8-1/8	CFF-2	DFC-2
N0319-F-03	FRONT FERRULE	303-1	N/A#	3FF3	DOF 3	3FF	760LF-3/16-3/16	CFF-3	DFC-3
N0319-F-04	FRONT FERRULE	403-1	N/A#	4FF4	DOF 4	4FF	760LF-1/4-1/4	CFF-4	DFC-4
N0319-F-05	FRONT FERRULE	503-1	N/A#	5FF5	DOF 5	5FF	760LF-5/16-5/16	CFF-5	DFC-5
N0319-F-06	FRONT FERRULE	603-1	N/A#	6FF6	DOF 6	6FF	760LF-3/8-3/8	CFF-6	DFC-6
N0319-F-08	FRONT FERRULE	813-1	N/A#	8FF8	DOF 8	8FF	760LF-1/2-1/2	CFF-8	DFC-8
N0319-F-10	FRONT FERRULE	1013-1	N/A#	10FF10	DOF 10	10FF	760LF-5/8-5/8	CFF-10	DFC-10
N0319-F-12	FRONT FERRULE	1213-1	N/A#	12FF12	DOF 12	12FF	760LF-3/4-3/4	CFF-12	DFC-12
N0319-F-14	FRONT FERRULE	1413-1	N/A#	14FF14	DOF 14	14FF	760LF-7/8-7/8	CFF-14	DFC-14
N0319-F-16	FRONT FERRULE	1613-1	N/A#	16FF16	DOF 16	16FF	760LF-1-1	CFF-16	DFC-16
N0319-F-20	FRONT FERRULE	2003-1	N/A#	20FF20	DOF 20	20FF	760LF-1-1/4-1-1/4	CFF-20	DFC-20
N0319-F-24	FRONT FERRULE	2413-1	N/A#	24FF24	DOF 24	24FF	760LF-1-1/2-1/2-1/2	CFF-24	DFC-24
N0319-F-32	FRONT FERRULE	3213-1	N/A#	32FF32	DOF 32	32FF	760LF-2-2	CFF-32	DFC-32
N0319-S-01	FERRULE SET	100 SET	1 TZ	1ALOK-SET	DOS 1	1SF	760LB + 760LF-1/16	CFS-1	DCSET-1-10
N0319-S-02	FERRULE SET	200 SET	2 TZ	2ALOK-SET	DOS 2	2SF	760LB + 760LF-1/8	CFS-2	DCSET-2-10
N0319-S-03	FERRULE SET	300 SET	3 TZ	3ALOK-SET	DOS 3	3SF	760LB + 760LF-3/16	CFS-3	DCSET-3-10
N0319-S-04	FERRULE SET	400 SET	4 TZ	4ALOK-SET	DOS 4	4SF	760LB + 760LF-1/4	CFS-4	DCSET-4-10
N0319-S-05	FERRULE SET	500 SET	5 TZ	5ALOK-SET	DOS 5	5SF	760LB + 760LF-5/16	CFS-5	DCSET-5-10
N0319-S-06	FERRULE SET	600 SET	6 TZ	6ALOK-SET	DOS 6	6SF	760LB + 760LF-3/8	CFS-6	DCSET-6-10
N0319-S-08	FERRULE SET	810 SET	8 TZ	8ALOK-SET	DOS 8	8SF	760LB + 760LF-1/2	CFS-8	DCSET-8-10
N0319-S-10	FERRULE SET	1010 SET	10 TZ	10ALOK-SET	DOS 10	10SF	760LB + 760LF-5/8	CFS-10	DCSET-10-10
N0319-S-12	FERRULE SET	1210 SET	12 TZ	12ALOK-SET	DOS 12	12SF	760LB + 760LF-3/4	CFS-12	DCSET-12-10
N0319-S-14	FERRULE SET	1410 SET	14 TZ	14ALOK-SET	DOS 14	14SF	760LB + 760LF-7/8	CFS-14	DCSET-14-10
N0319-S-16	FERRULE SET	1610 SET	16 TZ	16ALOK-SET	DOS 16	16SF	760LB + 760LF-1	CFS-16	DCSET-16-10
N0319-S-20	FERRULE SET	2000 SET	20 TZ	20ALOK-SET	DOS 20	20SF	760LB + 760LF-1-1/4	CFS-20	DCSET-20-10
N0319-S-24	FERRULE SET	2400 SET	24 TZ	24ALOK-SET	DOS 24	24SF	760LB + 760LF-1-1/2	CFS-24	DCSET-24-10
N0319-S-32	FERRULE SET	3200 SET	32 TZ	32ALOK-SET	DOS 32	32SF	760LB + 760LF-2	CFS-32	DCSET-32-10
N0319-FT-02	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N0319-FT-04	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N0319-FT-06	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N0319-FT-08	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N0319-FT-10	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#

# Cross Reference Chart

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N0319-FT-12	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N0319-FT-16	FERR TUBE & STICK	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#
N2402-02-02	IN-MJ	200-6-2AN	2-2 XHBZ	2XASC2	DUC 2-2	2UAN2	762LFL-1/8-1/8	CFU-2	2-SUANF-2
N2402-04-04	IN-MJ	400-6-4AN	4-4 XHBZ	4XASC4	DUC 4-4	4UAN4	762LFL-1/4-1/4	CFU-4	4-SUANF-4
N2402-06-06	IN-MJ	600-6-6AN	6-6 XHBZ	6XASC6	DUC 6-6	6UAN6	762LFL-3/8-38	CFU-6	6-SUANF-6
N2402-08-08	IN-MJ	810-6-8AN	8-8 XHBZ	8XASC8	DUC 8-8	8UAN8	762LFL-1/2-1/2	CFU-8	8-SUANF-8
N2402-12-12	IN-MJ	1210-6-12AN	12-12 XHBZ	12XASC12	DUC 12-12	12UAN12	762LFL-3/4-3/4	CFU-12	12-SUANF-12
N2402-16-16	IN-MJ	1610-6-16AN	16-16 XHBZ	16XASC16	DUC 16-16	16UAN16	762LFL-1	CFU-16	16-SUANF-16
N2403-01-01	IN-IN	100-6	1-1 HBZ	1SC1	DUA 1	1U	762L-1/16-1/16	CUA-1	1-DU
N2403-02-01	IN-IN	200-6-1	2-1 HBZ	2SC1	DUR 2-1	2RU1	762L-1/8-1/16	CUA-2-1	2-DRU-1
N2403-02-02	IN-IN	200-6	2-2 HBZ	2SC2	DUA 2	2U	762L-1/8-1/8	CUA-2	DU-2
N2403-03-02	IN-IN	300-6-2	3-2 HBZ	3SC2	DUR 3-2	3RU2	762L-3/16-1/8	CUR-3-2	3-DRU-2
N2403-03-03	IN-IN	300-6	3-3 HBZ	3SC3	DUA 3	3U	762L-3/16-3/16	CUA-3	DU-3
N2403-04-02	IN-IN	400-6-2	4-2 HBZ	4RU2	DUR 4-2	4RU2	763L-1/4-1/8	CUR-4-2	4-DRU-2
N2403-04-04	IN-IN	400-6	4-4 HBZ	4SC4	DUA 4	4U	762L-1/4-1/4	CUA-4	4-DU
N2403-05-02	IN-IN	500-6-2	5-2 HBZ	5RU2	DUR 5-2	5RU2	763L-5/16-1/8	CUR-5-2	5-DRU-2
N2403-05-04	IN-IN	500-6-4	5-4 HBZ	5RU4	DUA 5-4	5U	763L-5/16-1/4	CUR-5-4	5-DRU-4
N2403-05-05	IN-IN	500-6	5-5 HBZ	5SC5	DUA 5	5U	762L-5/16-5/16	CUA-5	6-DU
N2403-06-02	IN-IN	600-6-2	6-2 HBZ	6RU2	DUR 6-2	6RU2	763L-3/8-1/8	CUR-6-2	6-DRU-2
N2403-06-04	IN-IN	600-6-4	6-4 HBZ	6RU4	DUR 6-4	6RU4	763L-3/8-1/4	CUA-6-4	6-DRU-4
N2403-06-06	IN-IN	600-6	6-6 HBZ	6SC6	DUA 6	6U	762L-3/8-3/8	CUA-6	6-DU
N2403-08-02	IN-IN	810-6-2	8-2 HBZ	8RU2	DUR 8-2	8RU2	763L-1/2-1/8	CUR-8-2	8-DRU-2
N2403-08-04	IN-IN	810-6-4	8-4 HBZ	8RU4	DUR 8-4	8RU4	763L-1/2-1/4	CUR-8-4	8-DRU-4
N2403-08-06	IN-IN	810-6-6	8-6 HBZ	8RU6	DUR 8-6	8RU6	763L-1/2-3/8	CUR-8-6	8-DRU-6
N2403-08-08	IN-IN	810-6	8-8 HBZ	8SC8	DUA 8	8U	762L-1/2-1/2	CUA-8	8-DU
N2403-10-06	IN-IN	1010-6-6	10-6 HBZ	10RU6	DUR 10-6	10RU6	763L-5/8-3/8	CUR-10-6	10-DRU-6
N2403-10-08	IN-IN	1010-6-8	10-8 HBZ	10RU8	DUR 10-8	10RU8	763L-5/8-1/2	CUR-10-8	10-DRU-8
N2403-10-10	IN-IN	1010-6	10-10 HBZ	10SC10	DUA 10	10U	762L-5/8-5/8	CUA-10	10-DU
N2403-12-04	IN-IN	1210-6-4	12-4 HBZ	12RU4	DUR 12-4	12RU4	763L-3/4-1/4	CUR-12-4	12-DRU-4
N2403-12-06	IN-IN	1210-6-6	12-6 HBZ	12RU6	DUR 12-6	12RU6	763L-3/4-3/8	CUR-12-6	12-DRU-6
N2403-12-08	IN-IN	1210-6-8	12-8 HBZ	12RU8	DUR 12-8	12RU8	763L-3/4-1/2	CUR-12-8	12-DRU-8
N2403-12-12	IN-IN	1210-6	12-12 HBZ	12SC12	DUA 12	12U	762L-3/4-3/4	CUA-12	12-DU
N2403-14-14	IN-IN	1410-6	14-14 HBZ	14SC14	DUA 14	14U	762L-7/8-7/8	CUA-14	14-DU
N2403-16-08	IN-IN	1610-6-8	16-8 HBZ	16RU8	DUR 16-8	16RU8	763L-1/1-2	CUR-16-8	16-DRU-8
N2403-16-12	IN-IN	1610-6-12	16-12 HBZ	16RU12	DUR 16-12	16RU12	763L-1/3/4	CUR-16-12	16-DRU-12
N2403-16-16	IN-IN	1610-6	16-16 HBZ	16SC16	DUA 16	16U	762L-1-1	CUA-16	16-DU
N2403-20-16	IN-IN	2000-6-20	20-16 HBZ	20RU16	DUR 20-16	20RU16	763L-1/4-1/4	#NA	20-DRU-16
N2403-20-20	IN-IN	2000-6	20-20 HBZ	20SC20	DUA 20	20U	762L-1/4-1/4-1/4	CUA-20	20-DU
N2403-24-20	IN-IN	2400-6-20	24-20 HBZ	24RU20	DUR 24-20	24RU20	763L-1/2-1/4-1/4	#NA	24-DRU-20
N2403-24-24	IN-IN	2400-6	24-24 HBZ	24SC24	DUA 24	24U	762L-1/2-1/1-1/2	CUA-24	24-DU
N2403-32-32	IN-IN	3200-6	32-32 HBZ	32SC32	DUA 32	32U	762L-2-2	CUA-32	32-DU
N2404-01-01	IN-MNPT	100-1-1	1-1 FBZ	1MSC1N	DCT 1-1	1CM1	768L-1/16-1/16	CMC-1-1N	1-DMC-1
N2404-01-02	IN-MNPT	100-1-2	1-2 FBZ	1MSC1N	DCT 1-2	1CM2	768L-1/16-1/8	CMC-1-2N	1-DMC-2
N2404-02-01	IN-MNPT	200-1-1	2-1 FBZ	2MSC2N	DCT 2-1	2CM1	768L-1/8-1/16	CMC-2-1N	2-DMC-1
N2404-02-02	IN-MNPT	200-1-2	2-2 FBZ	2MSC2N	DCT 2-2	2CM2	768L-1/8-1/8	CMC-2-2N	2-DMC-2
N2404-02-04	IN-MNPT	200-1-4	2-4 FBZ	2MSC4N	DCT 2-4	2CM4	768L-1/8-1/4	CMC-2-4N	2-DMC-4
N2404-02-06	IN-MNPT	200-1-6	2-6 FBZ	2MSC6N	DCT 2-6	2CM6	768L-1/8-3/8	CMC-2-6N	2-DMC-6
N2404-03-02	IN-MNPT	300-1-2	3-2 FBZ	3MSC2N	DCT 3-2	3CM2	768L-3/16-1/8	CMC-3-2N	3-DMC-2
N2404-04-01	IN-MNPT	400-1-1	4-1 FBZ	4MSC1N	DCT 4-1	4CM1	768L-1/4-1/16	CMC-4-1N	4-DMC-1
N2404-04-02	IN-MNPT	400-1-2	4-2 FBZ	4MSC2N	DCT 4-2	4CM2	768L-1/4-1/8	CMC-4-2N	4-DMC-2
N2404-04-04	IN-MNPT	400-1-4	4-4 FBZ	4MSC4N	DCT 4-4	4CM4	768L-1/4-1/4	CMC-4-4N	4-DMC-4
N2404-04-06	IN-MNPT	400-1-6	4-6 FBZ	4MSC6N	DCT 4-6	4CM6	768L-1/4-3/8	CMC-4-6N	4-DMC-6
N2404-04-08	IN-MNPT	400-1-8	4-8 FBZ	4MSC8N	DCT 4-8	4CM8	768L-1/4-1/2	CMC-4-8N	4-DMC-8
N2404-05-02	IN-MNPT	500-1-2	5-2 FBZ	5MSC2N	DCT 5-2	5CM2	768L-1/6-1/8	CMC-5-2N	5-DMC-2
N2404-05-04	IN-MNPT	500-1-4	5-4 FBZ	5MSC4N	DCT 5-4	5CM4	768L-5/16-1/4	CMC-5-4N	5-DMC-4
N2404-06-02	IN-MNPT	600-1-2	6-2 FBZ	6MSC2N	DCT 6-2	6CM2	768L-3/8-1/8	CMC-6-2N	6-DMC-2
N2404-06-04	IN-MNPT	600-1-4	6-4 FBZ	6MSC4N	DCT 6-4	6CM4	768L-3/8-1/4	CMC-6-4N	6-DMC-4
N2404-06-06	IN-MNPT	600-1-6	6-6 FBZ	6MSC6N	DCT 6-6	6CM6	768L-3/8-3/8	CMC-6-6N	6-DMC-6
N2404-06-08	IN-MNPT	600-1-8	6-8 FBZ	6MSC8N	DCT 6-8	6CM8	768L-3/8-1/2	CMC-6-8N	6-DMC-8
N2404-06-12	IN-MNPT	600-1-12	6-12 FBZ	6MSC12N	DCT 6-12	6CM12	768L-3/8-3/4	CMC-6-12N	6-DMC-12
N2404-08-02	IN-MNPT	810-1-2	8-2 FBZ	8MSC2N	DCT 8-2	8CM2	768L-1/2-1/8	CMC-8-2N	8-DMC-2
N2404-08-04	IN-MNPT	810-1-4	8-4 FBZ	8MSC4N	DCT 8-4	8CM4	768L-1/2-1/4	CMC-8-4N	8-DMC-4
N2404-08-06	IN-MNPT	810-1-6	8-6 FBZ	8MSC6N	DCT 8-6	8CM6	768L-1/2-3/8	CMC-8-6N	8-DMC-6
N2404-08-08	IN-MNPT	810-1-8	8-8 FBZ	8MSC8N	DCT 8-8	8CM8	768L-1/2-1/2	CMC-8-8N	8-DMC-8
N2404-08-12	IN-MNPT	810-1-12	8-12 FBZ	8MSC12N	DCT 8-12	8CM12	768L-1/2-3/4	CMC-8-12N	8-DMC-12
N2404-08-16	IN-MNPT	810-1-16	8-16 FBZ	8MSC16N	DCT 8-16	8CM16	768L-1/2-1	CMC-8-16N	8-DMC-16
N2404-10-06	IN-MNPT	1010-1-6	10-6 FBZ	10MSC6N	DCT 10-6	10CM6	768L-5/8-3/8	CMC-10-6N	10-DMC-6
N2404-10-08	IN-MNPT	1010-1-8	10-8 FBZ	10MSC8N	DCT 10-8	10CM8	768L-5/8-1/2	CMC-10-8N	10-DMC-8
N2404-12-06	IN-MNPT	1210-1-6	12-6 FBZ	12MSC6N	DCT 12-6	12CM6	768L-3/4-3/8	CMC-12-6N	12-DMC-6
N2404-12-08	IN-MNPT	1210-1-8	12-8 FBZ	12MSC8N	DCT 12-8	12CM8	768L-3/4-1/2	CMC-12-8N	12-DMC-8
N2404-12-12	IN-MNPT	1210-1-12	12-12 FBZ	12MSC12N	DCT 12-12	12CM12	768L-3/4-3/4	CMC-12-12N	12-DMC-12
N2404-12-16	IN-MNPT	1210-1-16	12-16 FBZ	12MSC16N	DCT 12-16	12CM16	768L-3/4-1	CMC-12-16N	12-DMC-16
N2404-14-12	IN-MNPT	1410-1-12	14-12 FBZ	14MSC12N	DCT 14-12	14CM12	768L-7/8-3/4	CMC-14-12N	14-DMC-12
N2404-16-08	IN-MNPT	1610-1-8	16-8 FBZ	16MSC8N	DCT 16-8	16CM8	768L-1-1/2	CMC-16-8N	16-DMC-8
N2404-16-12	IN-MNPT	1610-1-12	16-12 FBZ	16MSC12N	DCT 16-12	16CM12	768L-1-3/4	CMC-16-12N	16-DMC-12

B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto



**BRENNAN** Industries®

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2404-16-16	IN-MNPT	1610-1-16	16-16 FBZ	16MSC16N	DCT 16-16	16CM16	768L-1-1	CMC-16-16N	16-DMC-16
N2404-20-16	IN-MNPT	2000-1-16	20-16 FBZ	20MSC16N	DCT 20-16	20CM16	768L-1-1/4-1	CMC-20-16N	20-DMC-16
N2404-20-20	IN-MNPT	2000-1-20	20-20 FBZ	20MSC20N	DCT 20-20	20CM20	768L-1-1/4-1-1/4	CMC-20-20N	20-DMC-20
N2404-24-24	IN-MNPT	2400-1-24	24-24 FBZ	24MSC24N	DCT 24-24	24CM24	768L-1-1/2-1-1/2	CMC-24-24N	24-DMC-24
N2404-32-32	IN-MNPT	3200-1-32	32-32 FBZ	32MSC32N	DCT 32-32	32CM32	768L-2-2	CMC-32-32N	32-DMC-32
N2404-01-01-BT	IN-MNPT Bore Through	100-1-1BT	1-1 FH4BZ	1MTC1N	DCZ 1-1	1CMT1	768L 1/16X1/16 TC	CMCT-1-1N	1-DMC-1-BT
N2404-01-02-BT	IN-MNPT Bore Through	100-1-2BT	1-2 FH4BZ	1MTC2N	DCZ 1-2	1CMT2	768L 1/16X1/8 TC	CMCT-1-2N	1-DMC-2-BT
N2404-02-02-BT	IN-MNPT Bore Through	200-1-2BT	2-2 FH4BZ	2MTC2N	DCZ 2-2	2CMT2	768L 1/8X1/8 TC	CMCT-2-2N	2-DMC-2-BT
N2404-02-04-BT	IN-MNPT Bore Through	200-1-4BT	2-4 FH4BZ	2MTC4N	DCZ 2-4	2CMT4	768L 1/8X1/4 TC	CMCT-2-4N	2-DMC-4-BT
N2404-03-02-BT	IN-MNPT Bore Through	300-1-2BT	3-2 FH4BZ	3MTC2N	DCZ 3-2	3CMT3	768L 3/16X1/8 TC	CMCT-3-2N	3-DMC-2-BT
N2404-03-04-BT	IN-MNPT Bore Through	300-1-4BT	3-4 FH4BZ	3MTC4N	DCZ 3-4	3CMT4	768L 3/16X1/4 TC	CMCT-3-4N	3-DMC-4-BT
N2404-04-02-BT	IN-MNPT Bore Through	400-1-2BT	4-2 FH4BZ	4MTC2N	DCZ 4-2	4CMT2	768L 1/4X1/8 TC	CMCT-4-2N	4-DMC-2-BT
N2404-04-04-BT	IN-MNPT Bore Through	400-1-4BT	4-4 FH4BZ	4MTC4N	DCZ 4-4	4CMT4	768L 1/4X1/4 TC	CMCT-4-4N	4-DMC-4-BT
N2404-04-06-BT	IN-MNPT Bore Through	400-1-6BT	4-6 FH4BZ	4MTC6N	DCZ 4-6	4CMT6	768L 1/4X3/8 TC	CMCT-4-6N	4-DMC-6-BT
N2404-04-08-BT	IN-MNPT Bore Through	400-1-8BT	4-8 FH4BZ	4MTC8N	DCZ 4-8	4CMT8	768L 1/4X1/2 TC	CMCT-4-8N	4-DMC-8-BT
N2404-05-04-BT	IN-MNPT Bore Through	500-1-4BT	5-4 FH4BZ	5MTC4N	DCZ 5-4	5CMT4	768L 5/16X1/4 TC	CMCT-5-4N	5-DMC-4-BT
N2404-05-08-BT	IN-MNPT Bore Through	500-1-8BT	5-8 FH4BZ	5MTC8N	DCZ 5-8	5CMT8	768L 5/16X1/2 TC	CMCT-5-8N	5-DMC-8-BT
N2404-06-04-BT	IN-MNPT Bore Through	600-1-4BT	6-4 FH4BZ	6MTC4N	DCZ 6-4	6CMT4	768L 3/8X1/4 TC	CMCT-6-4N	6-DMC-4-BT
N2404-06-06-BT	IN-MNPT Bore Through	600-1-6BT	6-6 FH4BZ	6MTC6N	DCZ 6-6	6CMT6	768L 3/8X3/8 TC	CMCT-6-6N	6-DMC-6-BT
N2404-06-08-BT	IN-MNPT Bore Through	600-1-8BT	6-8 FH4BZ	6MTC8N	DCZ 6-8	6CMT8	768L 3/8X1/2 TC	CMCT-6-8N	6-DMC-8-BT
N2404-08-06-BT	IN-MNPT Bore Through	810-1-6BT	8-6 FH4BZ	8MTC6N	DCZ 8-6	8CMT6	768L 1/2X3/8 TC	CMCT-8-6N	8-DMC-6-BT
N2404-08-08-BT	IN-MNPT Bore Through	810-1-8BT	8-8 FH4BZ	8MTC8N	DCZ 8-8	8CMT8	768L 1/2X1/2 TC	CMCT-8-8N	8-DMC-8-BT
N2404-08-12-BT	IN-MNPT Bore Through	810-1-12BT	8-12 FH4BZ	8MTC12N	DCZ 8-12	8CMT12	768L 1/2X3/4 TC	CMCT-8-12N	8-DMC-12-BT
N2404-10-08-BT	IN-MNPT Bore Through	1010-1-8BT	10-8 FH4BZ	10MTC8N	DCZ 10-8	10CMT8	768L 5/8X1/2 TC	CMCT-10-8N	10-DMC-8-BT
N2404-10-12-BT	IN-MNPT Bore Through	1010-1-12BT	10-12 FH4BZ	10MTC12N	DCZ 10-12	10CMT12	768L 5/8X3/4 TC	CMCT-10-12N	10-DMC-12-BT
N2404-12-08-BT	IN-MNPT Bore Through	1210-1-8BT	12-8 FH4BZ	12MTC8N	DCZ 12-8	12CMT8	768L 3/4X1/2 TC	CMCT-12-8N	12-DMC-8
N2404-12-12-BT	IN-MNPT Bore Through	1210-1-12BT	12-12 FH4BZ	12MTC12N	DCZ 12-12	12CMT12	768L 3/4X3/4 TC	CMCT-12-12N	12-DMC-12
N2404-12-16-BT	IN-MNPT Bore Through	1210-1-16BT	12-16 FH4BZ	12MTC16N	DCZ 12-16	12CMT16	768L 3/4X1 TC	CMCT-12-16N	12-DMC-16
N2404-14-12-BT	IN-MNPT Bore Through	1410-1-12BT	14-12 FH4BZ	14MTC12N	DCZ 14-12	14CMT12	768L 7/8X3/4 TC	CMCT-14-12N	14-DMC-12
N2404-14-16-BT	IN-MNPT Bore Through	1410-1-16BT	14-16 FH4BZ	14MTC16N	DCZ 14-16	14CMT16	768L 7/8X1 TC	CMCT-14-16N	14-DMC-16
N2404-16-12-BT	IN-MNPT Bore Through	1610-1-12BT	16-12 FH4BZ	16MTC12N	DCZ 16-12	16CMT12	768L 1X3/4 TC	CMCT-16-12N	16-DMC-12
N2404-16-16-BT	IN-MNPT Bore Through	1610-1-16BT	16-16 FH4BZ	16MTC16N	DCZ 16-16	16CMT16	768L 1X1 TC	CMCT-16-16N	16-DMC-16
N2405-01-01	IN-FNPT	100-7-1	1-1 GBZ	1FSC1N	DSA 1-1	1CF1	766L-1/16-1/16	CFC-1-1N	1-DFC-1
N2405-01-02	IN-FNPT	100-7-2	1-2 GBZ	1FSC2N	DSA 1-2	1CF2	766L-1/16-1/8	CFC-1-2N	1-DFC-2
N2405-02-02	IN-FNPT	200-7-2	2-2 GBZ	2FSC2N	DSA 2-2	2CF2	766L-1/8-1/8	CFC-2-2N	2-DFC-2
N2405-02-04	IN-FNPT	200-7-4	2-4 GBZ	2FSC4N	DSA 2-4	2CF4	766L-1/8-1/4	CFC-2-4N	2-DFC-4
N2405-03-02	IN-FNPT	300-7-2	3-2 GBZ	3FSC2N	DSA 3-2	3CF2	766L-1/16-1/8	CFC-3-2N	3-DFC-2
N2405-04-02	IN-FNPT	400-7-2	4-2 GBZ	4FSC2N	DSA 4-2	4CF2	766L-1/4-1/8	CFC-4-2N	4-DFC-2
N2405-04-04	IN-FNPT	400-7-4	4-4 GBZ	4FSC4N	DSA 4-4	4CF4	766L-1/4-1/4	CFC-4-4N	4-DFC-4
N2405-04-06	IN-FNPT	400-7-6	4-6 GBZ	4FSC6N	DSA 4-6	4CF6	766L-1/4-3/8	CFC-4-6N	4-DFC-6
N2405-04-08	IN-FNPT	400-7-8	4-8 GBZ	4FSC8N	DSA 4-8	4CF8	766L-1/4-1/2	CFC-4-8N	4-DFC-8
N2405-05-02	IN-FNPT	500-7-2	5-2 GBZ	5FSC2N	DSA 5-2	5CF2	766L-1/6-1/8	CFC-5-2N	5-DFC-2
N2405-05-04	IN-FNPT	500-7-4	5-4 GBZ	5FSC4N	DSA 5-4	5CF4	766L-1/16-1/4	CFC-5-4N	5-DFC-4
N2405-06-02	IN-FNPT	600-7-2	6-2 GBZ	6FSC2N	DSA 6-2	6CF2	766L-3/8-1/8	CFC-6-2N	6-DFC-2
N2405-06-04	IN-FNPT	600-7-4	6-4 GBZ	6FSC4N	DSA 6-4	6CF4	766L-3/8-1/4	CFC-6-4N	6-DFC-4
N2405-06-06	IN-FNPT	600-7-6	6-6 GBZ	6FSC6N	DSA 6-6	6CF6	766L-3/8-3/8	CFC-6-6N	6-DFC-6
N2405-06-08	IN-FNPT	600-7-8	6-8 GBZ	6FSC8N	DSA 6-8	6CF8	766L-3/8-1/2	CFC-6-8N	6-DFC-8
N2405-08-04	IN-FNPT	810-7-4	8-4 GBZ	8FSC4N	DSA 8-4	8CF4	766L-12-1/4	CFC-8-4N	8-DFC-4
N2405-08-06	IN-FNPT	810-7-6	8-6 GBZ	8FSC6N	DSA 8-6	8CF6	766L-12-3/8	CFC-8-6N	8-DFC-6
N2405-08-08	IN-FNPT	810-7-8	8-8 GBZ	8FSC8N	DSA 8-8	8CF8	766L-12-1/2	CFC-8-8N	8-DFC-8
N2405-08-12	IN-FNPT	810-7-12	8-12 GBZ	8FSC12N	DSA 8-12	8CF12	766L-12-3/4	CFC-8-12N	8-DFC-12
N2405-10-06	IN-FNPT	1010-7-6	10-6 GBZ	10FSC6N	DSA 10-6	10CF6	766L-5/8-3/8	CFC-10-6N	10-DFC-6
N2405-10-08	IN-FNPT	1010-7-8	10-8 GBZ	10FSC8N	DSA 10-8	10CF8	766L-5/8-1/2	CFC-10-8N	10-DFC-8
N2405-12-08	IN-FNPT	1210-7-8	12-8 GBZ	12FSC8N	DSA 12-8	12CF8	766L-3/4-1/2	CFC-12-8N	12-DFC-8
N2405-12-12	IN-FNPT	1210-7-12	12-12 GBZ	12FSC12N	DSA 12-12	12CF12	766L-3/4-3/4	CFC-12-12N	12-DFC-12
N2405-14-12	IN-FNPT	1410-7-12	14-12 GBZ	14FSC12N	DSA 14-12	14CF12	766L-7/8-3/4	CFC-14-12N	14-DFC-12
N2405-16-12	IN-FNPT	1610-7-12	16-12 GBZ	16FSC12N	DSA 16-12	16CF12	766L-1-3/4	CFC-16-12N	16-DFC-12
N2405-16-16	IN-FNPT	1610-7-16	16-16 GBZ	16FSC16N	DSA 16-16	16CF16	766L-1-1	CFC-16-16N	16-DFC-16
N2405-20-20	IN-FNPT	2000-7-20	20-20 GBZ	20FSC20N	DSA 20-20	20CF20	766L-1-1/4-1/4	CFC-20-20N	20-DFC-20
N2405-24-24	IN-FNPT	2400-7-24	24-24 GBZ	24FSC24N	DSA 24-24	24CF24	766L-1/2-1/2-1/2	CFC-24-24N	24-DFC-24
N2406-02-04	TUBE RED	200-R-4	4-2 TRBZ	4TRU2	DRE 2-4	2R4	767LT-1/8-1/4	CR-2-4	2-DRATT-4
N2406-04-02	TUBE RED	400-R-2	2-4 TRBZ	2TRU4	DRE 4-2	4R2	767LT-1/4-1/8	CR-4-2	4-DRATT-2
N2406-04-04	TUBE RED	400-R-4	4-4 TRBZ	4TRU4	DRE 4-4	4R4	767LT-1/4-1/4	CR-4-4	4-DRATT-4
N2406-04-06	TUBE RED	400-R-6	6-2 TRBZ	6TRU4	DRE 4-6	4R6	767LT-1/4-3/8	CR-4-6	4-DRATT-6
N2406-04-08	TUBE RED	400-R-8	8-4 TRBZ	8TRU4	DRE 4-8	4R8	767LT-1/4-1/2	CR-4-8	4-DRATT-8
N2406-05-06	TUBE RED	500-R-6	6-5 TRBZ	6TRU5	DRE 5-6	5R6	767LT-5/6-3/8	CR-5-6	5-DRATT-6
N2406-05-08	TUBE RED	500-R-8	8-5 TRBZ	8TRU5	DRE 5-8	5R8	767LT-5/6-1/2	CR-5-8	5-DRATT-8
N2406-06-02	TUBE RED	200-R-6	6-2 TRBZ	6TRU2	DRE 6-2	6R2	767LT-3/8-1/8	CR-6-2	6-DRATT-2
N2406-06-04	TUBE RED	600-R-4	4-6 TRBZ	4TRU6	DRE 6-4	6R4	767LT-3/8-1/4	CR-6-4	6-DRATT-4
N2406-06-06	TUBE RED	600-R-6	6-6 TRBZ	6TRU6	DRE 6-6	6R6	767LT-3/8-3/8	CR-6-6	6-DRATT-6
N2406-06-08	TUBE RED	600-R-8	8-6 TRBZ	8TRU6	DRE 6-8	6R8	767LT-3/8-1/2	CR-6-8	6-DRATT-8
N2406-08-02	TUBE RED	810-R-2	2-8 TRBZ	8TRU2	DRE 8-2	8R2	767LT-1/2-1/8	CR-8-2	8-DRATT-2
N2406-08-04	TUBE RED	810-R-4	4-8 TRBZ	4TRU8	DRE 8-4	8R4	767LT-1/2-1/4	CR-8-4	8-DRATT-4
N2406-08-06	TUBE RED	810-R-6	6-8 TRBZ	6TRU8	DRE 8-6	8R6	767LT-1/2-3/8	CR-8-6	8-DRATT-6
N2406-08-08	TUBE RED	810-R-8	8-8 TRBZ	8TRU8	DRE 8-8	8R8	767LT-1/2-1/2	CR-8-8	8-DRATT-8

# Cross Reference Chart

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2406-08-12	TUBE RED	810-R-12	12-8 TRBZ	12TUR8	DRE 8-12	8R12	767LT-1/2-3/4	CR-8-12	8-DRATT-12
N2406-08-16	TUBE RED	810-R-16	16-8 TRBZ	16TUR8	DRE 8-16	8R16	767LT-1/2-1	CR-8-16	8-DRATT-16
N2406-10-12	TUBE RED	1010-R-12	12-10 TRBZ	12TUR10	DRE 10-12	10R12	767LT-5/8-3/4	CR-10-12	10-DRATT-12
N2406-10-14	TUBE RED	1010-R-14	14-10 TRBZ	14TUR10	DRE 10-14	10R14	767LT-5/8-7/8	CR-10-14	10-DRATT-14
N2406-12-16	TUBE RED	1210-R-16	16-12 TRBZ	16TUR12	DRE 12-16	12R16	767LT-3/4-1	CR-12-16	12-DRATT-16
N2406-16-20	TUBE RED	1610-R-20	20-16 TRBZ	20TUR16	DRE 16-20	16R20	767LT-1-1-1/4	CR-16-20	16-DRATT-20
N2406-16-24	TUBE RED	1610-R-24	24-16 TRBZ	24TUR16	DRE 16-24	16R24	767LT-1-1/1/2	CR-16-24	16-DRATT-24
N2406-24-16	TUBE RED	2400-R-16	16-24 TRBZ	16TUR24	DRE 24-16	24R16	767LT-11/2-1	CR-24-16	24-DRATT-16
N2408-01	IN CAP	100-C	1 PNZ	1BLEN1	DCA 1	1CP	710BL-1/16-1/16	CCA-1	1-DCAP
N2408-02	IN CAP	200-C	2 PNZ	2BLEN2	DCA 2	2CP	710BL-1/8-1/8	CCA-2	2-DCAP
N2408-03	IN CAP	300-C	3 PNZ	3BLEN3	DCA 3	3CP	710BL-3/16-3/16	CCA-3	3-DCAP
N2408-04	IN CAP	400-C	4 PNZ	4BLEN4	DCA 4	4CP	710BL-1/4-1/4	CCA-4	4-DCAP
N2408-05	IN CAP	500-C	5 PNZ	5BLEN5	DCA 5	5CP	710BL-5/16-5/16	CCA-5	5-DCAP
N2408-06	IN CAP	600-C	6 PNZ	6BLEN6	DCA 6	6CP	710BL-3/8-3/8	CCA-6	6-DCAP
N2408-08	IN CAP	810-C	8 PNZ	8BLEN8	DCA 8	8CP	710BL-1/2-1/2	CCA-8	8-DCAP
N2408-10	IN CAP	1010-C	10 PNZ	10BLEN10	DCA 10	10CP	710BL-5/8-5/8	CCA-10	10-DCAP
N2408-12	IN CAP	1210-C	12 PNZ	12BLEN12	DCA 12	12CP	710BL-3/4-3/4	CCA-12	12-DCAP
N2408-14	IN CAP	1410-C	14 PNZ	14BLEN14	DCA 14	14CP	710BL-7/8-7/8	CCA-14	14-DCAP
N2408-16	IN CAP	1610-C	16 PNZ	16BLEN16	DCA 16	16CP	710BL-1-1	CCA-16	16-DCAP
N2408-20	IN CAP	2000-C	20 PNZ	20BLEN20	DCA 20	20CP	710BL-1/4-1/4-1/4	CCA-20	20-DCAP
N2408-24	IN CAP	2400-C	24 PNZ	24BLEN24	DCA 24	24CP	710BL-1/2-1/2-1/2	CCA-24	24-DCAP
N2408-32	IN CAP	3200-C	32 PNZ	32BLEN32	DCA 32	32CP	710BL-2-2	CCA-32	32-DCAP
N2425-02-02	IN-BW	200-1-2W	2-1/8 ZHBW2	2-1/8 ZHLW2	DCB 2-2	2CBW2	768LN-1/8-1/8	CWC-2-2P	2-DBTW-2
N2425-04-02	IN-BW	400-1-2W	4-1/8 ZHBW2	4-1/8 ZHLW2	DCB 4-2	4CBW2	768LN-1/4-1/8	CWC-4-2P	4-DBTW-2
N2425-04-04	IN-BW	400-1-4W	4-1/4 ZHBW2	4-1/4 ZHLW2	DCB 4-4	4CBW4	768LN-1/4-1/4	CWC-4-4P	4-DBTW-4
N2425-05-02	IN-BW	500-1-2W	5-1/8 ZHBW2	5-1/8 ZHLW2	DCB 5-2	5CBW2	768LN-5/16-1/8	CWC-5-2P	5-DBTW-2
N2425-05-04	IN-BW	500-1-4W	5-1/4 ZHBW2	5-1/4 ZHLW2	DCB 5-4	5CBW4	768LN-5/16-1/4	CWC-5-4P	5-DBTW-4
N2425-06-04	IN-BW	600-1-4W	6-1/4 ZHBW2	6-1/4 ZHLW2	DCB 6-4	6CBW4	768LN-3/8-1/4	CWC-6-4P	6-DBTW-4
N2425-06-06	IN-BW	600-1-6W	6-3/8 ZHBW2	6-3/8 ZHLW2	DCB 6-6	6CBW6	768LN-3/8-3/8	CWC-6-6P	6-DBTW-6
N2425-06-08	IN-BW	600-1-8W	6-1/2 ZHBW2	6-1/2 ZHLW2	DCB 6-8	6CBW8	768LN-3/8-1/2	CWC-6-8P	6-DBTW-8
N2425-08-06	IN-BW	810-1-6W	8-3/8 ZHBW2	8-3/8 ZHLW2	DCB 8-6	8CBW6	768LN-1/2-3/8	CWC-8-6P	8-DBTW-6
N2425-08-08	IN-BW	810-1-8W	8-1/2 ZHBW2	8-1/2 ZHLW2	DCB 8-8	8CBW8	768LN-1/2-1/2	CWC-8-8P	8-DBTW-8
N2425-08-12	IN-BW	810-1-12W	8-3/4 ZHBW2	8-3/4 ZHLW2	DCB 8-12	8CBW12	768LN-1/2-3/4	CWC-8-12P	8-DBTW-12
N2425-10-08	IN-BW	1010-1-8W	10-1/2 ZHBW2	10-1/2 ZHLW2	DCB 10-8	10CBW8	768LN-5/8-1/2	CWC-10-8P	10-DBTW-8
N2425-12-12	IN-BW	1210-1-12W	12-3/4 ZHBW2	12-3/4 ZHLW2	DCB 12-12	12CBW12	768LN-3/4-3/4	CWC-12-12P	12-DBTW-12
N2425-16-16	IN-BW	1610-1-16W	16-1 ZHBW2	16-1 ZHLW2	DCB 16-16	16CBW16	768LN-1-1	CWC-16-16P	16-DBTW-16
N2425-20-20	IN-BW	2000-1-2W	20-1-1/4 ZHBW2	20-1-1/4 ZHLW2	DCB 20-20	20CBW20	768LN-1-1/4-1/4-1/4	CWC-20-20P	20-DBTW-20
N2425-24-24	IN-BW	2400-1-2W	24-1-1/2 ZHBW2	24-1-1/2 ZHLW2	DCB 24-24	24CBW24	768LN-1-1/2-1/2-1/2	CWC-24-24P	24-DBTW-24
N2426-02-02	IN-SW	200-6-2W	2-2 ZHW	2-2-Z-SHSLW	DCW 2	2CW2	768LN-1/8-1/8	CSWC-2-2	2-DTSW-2
N2426-04-04	IN-SW	400-6-4W	4-4 ZHW	4-4-Z-SHSLW	DCW 4	4CW4	768LN-1/4-1/4	CSWC-4-4	4-DTSW-4
N2426-06-06	IN-SW	600-6-6W	6-6 ZHW	6-6-Z-SHSLW	DCW 6	6CW6	768LN-3/8-3/8	CSWC-6-6	6-DTSW-6
N2426-08-08	IN-SW	810-6-8W	8-8 ZHW	8-8-Z-SHSLW	DCW 8	8CW8	768LN-1/2-1/2	CSWC-8-8	8-DTSW-8
N2426-12-12	IN-SW	1210-6-12W	12-12 ZHW	12-12-Z-SHSLW	DCW 12	12CW12	768LN-3/4-3/4	CSWC-12-12	12-DTSW-12
N2426-16-16	IN-SW	1610-6-16W	16-16 ZHW	16-16-Z-SHSLW	DCW 16	16CW16	768LN-1-1	CSWC-16-16	16-DTSW-16
N2426-20-20	IN-SW	2000-6-20W	20-20 ZHW	20-20-Z-SHSLW	DCW 20	20CW20	768LN-1-1/4-1/4-1/4	CSWC-20-20	20-DTSW-20
N2426-24-24	IN-SW	2400-6-20W	24-24 ZHW	24-24-Z-SHSLW	DCW 24	24CW24	768LN-1-1/2-1/2-1/2	CSWC-24-24	24-DTSW-24
N2427-04-04	STDPIPE-MJIC	4-TA-1-4AN	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	4-DATANF-4
N2427-06-06	STDPIPE-MJIC	6-TA-1-6AN	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	6-DATANF-6
N2427-08-08	STDPIPE-MJIC	8-TA-1-8AN	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	8-DATANF-8
N2427-12-12	STDPIPE-MJIC	12-TA-1-12AN	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	12-DATANF-12
N2427-16-16	STDPIPE-MJIC	16-TA-1-16AN	N/A#	N/A#	N/A#	N/A#	N/A#	N/A#	16-DATANF-16
N2428-02-02	STDPIPE-MNPT	2-TA-1-2	2-2 T2HF	2MA2N	DHA 2-2	2AM2	739LM-1/8-1/8	CAM-2-2N	2-DATPM-2
N2428-02-04	STDPIPE-MNPT	2-TA-1-4	2-4 T2HF	2MA4N	DHA 2-4	2AM4	739LM-1/8-1/4	CAM-2-4N	2-DATPM-4
N2428-03-02	STDPIPE-MNPT	3-TA-1-2	3-2 T2HF	3MA2N	DHA 3-2	3AM2	739LM-3/16-1/8	CAM-3-2N	3-DATPM-2
N2428-03-04	STDPIPE-MNPT	3-TA-1-4	3-4 T2HF	3MA4N	DHA 3-4	3AM4	739LM-3/16-1/4	CAM-3-4N	3-DATPM-4
N2428-04-02	STDPIPE-MNPT	4-TA-1-2	4-2 T2HF	4MA2N	DHA 4-2	4AM2	739LM-1/4-1/8	CAM-4-2N	4-DATPM-2
N2428-04-04	STDPIPE-MNPT	4-TA-1-4	4-4 T2HF	4MA4N	DHA 4-4	4AM4	739LM-1/4-1/4	CAM-4-4N	4-DATPM-4
N2428-04-06	STDPIPE-MNPT	4-TA-1-6	4-6 T2HF	4MA6N	DHA 4-6	4AM6	739LM-1/4-3/8	CAM-4-6N	4-DATPM-6
N2428-04-08	STDPIPE-MNPT	4-TA-1-8	4-8 T2HF	4MA8N	DHA 4-8	4AM8	739LM-1/4-1/2	CAM-4-8N	4-DATPM-8
N2428-05-04	STDPIPE-MNPT	5-TA-1-4	5-4 T2HF	5MA4N	DHA 5-4	5AM4	739LM-5/16-1/4	CAM-5-4N	5-DATPM-5
N2428-06-02	STDPIPE-MNPT	6-TA-1-2	6-2 T2HF	6MA2N	DHA 6-2	6AM2	739LM-3/8-1/8	CAM-6-2N	6-DATPM-2
N2428-06-04	STDPIPE-MNPT	6-TA-1-4	6-4 T2HF	6MA4N	DHA 6-4	6AM4	739LM-3/8-1/4	CAM-6-4N	6-DATPM-4
N2428-06-06	STDPIPE-MNPT	6-TA-1-6	6-6 T2HF	6MA6N	DHA 6-6	6AM6	739LM-3/8-3/8	CAM-6-6N	6-DATPM-6
N2428-06-08	STDPIPE-MNPT	6-TA-1-8	6-8 T2HF	6MA8N	DHA 6-8	6AM8	739LM-3/8-1/2	CAM-6-8N	6-DATPM-8
N2428-08-04	STDPIPE-MNPT	8-TA-1-4	8-4 T2HF	8MA4N	DHA 8-4	8AM4	739LM-1/2-1/4	CAM-8-4N	8-DATPM-4
N2428-08-06	STDPIPE-MNPT	8-TA-1-6	8-6 T2HF	8MA6N	DHA 8-6	8AM6	739LM-1/2-3/8	CAM-8-6N	8-DATPM-6
N2428-08-08	STDPIPE-MNPT	8-TA-1-8	8-8 T2HF	8MA8N	DHA 8-8	8AM8	739LM-1/2-1/2	CAM-8-8N	8-DATPM-8
N2428-10-08	STDPIPE-MNPT	10-TA-1-8	10-8 T2HF	10MA8N	DHA 10-8	10AM8	739LM-5/8-1/2	CAM-10-8N	10-DATPM-8
N2428-12-08	STDPIPE-MNPT	12-TA-1-8	12-8 T2HF	12MA8N	DHA 12-8	12AM8	739LM-3/4-1/2	CAM-12-8N	12-DATPM-8
N2428-12-12	STDPIPE-MNPT	12-TA-1-12	12-12 T2HF	12MA12N	DHA 12-12	12AM12	739LM-3/4-3/4	CAM-12-12N	12-DATPM-12
N2428-16-12	STDPIPE-MNPT	16-TA-1-12	16-12 T2HF	16MA12N	DHA 16-12	16AM12	739LM-1-3/4	CAM-16-12N	16-DATPM-12
N2428-16-16	STDPIPE-MNPT	16-TA-1-16	16-16 T2HF	16MA16N	DHA 16-16	16AM16	739LM-1-1	CAM-16-16N	16-DATPM-16
N2428-20-20	STDPIPE-MNPT	20-TA-1-20	20-20 T2HF	20MA20N	DHA 20-20	20AM20	739LM-1-1/4-1/1-1/4	CAM-20-20N	20-DATPM-20
N2428-24-24	STDPIPE-MNPT	24-TA-1-24	24-24 T2HF	24MA24N	DHA 24-24	24AM24	739LM-1-1/2-1/1-1/2	CAM-24-24N	24-DATPM-24
N2429-02-02	STDPIPE-MORB	2-TA-1-2ST	2-2 T2HOA	2M2TU2	N/A#	2AOS	N/A#	N/A#	N/A#

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2429-04-04	STDPIPE-MORB	4-TA-1-4ST	4-4 T2HOA	4M2TU4	N/A#	4AOS	N/A#	CAOS-4-4U	N/A#
N2429-06-04	STDPIPE-MORB	6-TA-1-4ST	6-4 T2HOA	6M2TU4	N/A#	6AOS	N/A#	CAOS-6-4U-316	N/A#
N2429-06-06	STDPIPE-MORB	6-TA-1-6	6-6 T2HOA	6M2TU6	N/A#	6AOS	N/A#	CAOS-6-6U	N/A#
N2429-08-08	STDPIPE-MORB	8-TA-1-8ST	8-8 T2HOA	8M2TU8	N/A#	8AOS	N/A#	CAOS-8-8U	N/A#
N2429-08-10	STDPIPE-MORB	8-TA-1-10ST	8-10 T2HOA	8M2TU10	N/A#	8AOS10	N/A#	CAOS-8-10U	N/A#
N2429-12-12	STDPIPE-MORB	12-TA-1-12ST	12-12 T2HOA	12M2TU12	N/A#	12AOS	N/A#	CAOS-12-12U	N/A#
N2429-16-16	STDPIPE-MORB	16-TA-1-16ST	16-16 T2HOA	16M2T16	N/A#	16AOS	N/A#	CAOS-16-16U	N/A#
N2429-20-20	STDPIPE-MORB	20-TA-1-20ST	20-20 T2HOA	20M2TU20	N/A#	20AOS	N/A#	CAOS-20-20U	N/A#
N2429-24-24	STDPIPE-MORB	24-TA-1-24ST	24-24 T2HOA	24M2TU24	N/A#	24AOS	N/A#	CAOS-24-24U	N/A#
N2430-02-02	STDPIPE-FNPT	2-TA-7-2	2-2 T2HG	2FA2N	DHC 2-2	2AF2	739LF-1/8-1/8	CAF-2-2N	2-DATPF-2
N2430-02-04	STDPIPE-FNPT	2-TA-7-4	2-4 T2HG	2FA4N	DHC 2-4	2AF4	739LF-1/8-1/4	CAF-2-4N	4-DATPF-4
N2430-04-02	STDPIPE-FNPT	4-TA-7-2	4-2 T2HG	4FA2N	DHC 4-2	4AF2	739LF-1/4-1/8	CAF-4-2N	4-DATPF-2
N2430-04-04	STDPIPE-FNPT	4-TA7-4	4-4 T2HG	4FA4N	DHC 4-4	4AF4	739LF-1/4-1/4	CAF-4-4N	4-DATPF-4
N2430-04-06	STDPIPE-FNPT	4-TA7-6	4-6 T2HG	4FA6N	DHC 4-6	4AF6	739LF-1/4-3/8	CAF-4-6N	4-DATPF-6
N2430-04-08	STDPIPE-FNPT	4-TA7-8	4-8 T2HG	4FA8N	DHC 4-8	4AF8	739LF-1/4-1/2	CAF-4-8N	4-DATPF-8
N2430-05-04	STDPIPE-FNPT	5-TA7-4	5-4 T2HG	5FA4N	DHC 5-4	5AF4	739LF-5/16-1/4	CAF-5-4N	5-DATPF-4
N2430-06-04	STDPIPE-FNPT	6-TA7-4	6-4 T2HG	6FA4N	DHC 6-4	6AF4	739LF-3/8-1/4	CAF-6-4N	6-DATPF-4
N2430-06-06	STDPIPE-FNPT	6-TA7-6	6-6 T2HG	6FA6N	DHC 6-6	6AF6	739LF-3/8-3/8	CAF-6-6N	6-DATPF-6
N2430-06-08	STDPIPE-FNPT	6-TA7-8	6-8 T2HG	6FA8N	DHC 6-8	6AF8	739LF-3/8-1/2	CAF-6-8N	6-DATPF-8
N2430-08-04	STDPIPE-FNPT	8-TA7-4	8-4 T2HG	8FA4N	DHC 8-4	8AF4	739LF-1/2-1/4	CAF-8-4N	8-DATPF-4
N2430-08-06	STDPIPE-FNPT	8-TA7-6	8-6 T2HG	8FA6N	DHC 8-6	8AF6	739LF-1/2-3/8	CAF-8-6N	8-DATPF-6
N2430-08-08	STDPIPE-FNPT	8-TA7-8	8-8 T2HG	8FA8N	DHC 8-8	8AF8	739LF-1/2-1/2	CAF-8-8N	8-DATPF-8
N2430-10-08	STDPIPE-FNPT	10-TA7-8	10-8 T2HG	10FA8N	DHC 10-8	10AF8	739LF-5/8-1/2	CAF-10-8N	10-DATPF-8
N2430-12-08	STDPIPE-FNPT	12-TA7-8	12-8 T2HG	12FA8N	DHC 12-8	12AF8	739LF-3/4-1/2	CAF-12-8N	12-DATPF-8
N2430-12-12	STDPIPE-FNPT	12-TA7-12	12-12 T2HG	12FA12N	DHC 12-12	12AF12	739LF-3/4-3/4	CAF-12-12N	12-DATPF-12
N2430-12-16	STDPIPE-FNPT	12-TA7-16	12-16 T2HG	12FA16N	DHC 12-16	12AF16	739LF-3/4-1	CAF-12-16N	12-DATPF-16
N2430-16-12	STDPIPE-FNPT	16-TA7-16	16-16 T2HG	16FA16N	DHC 16-16	16AF16	739LF-1-1	CAF-16-16N	16-DATPF-12
N2430-16-16	STDPIPE-FNPT	16-TA7-12	16-12 T2HG	16FA12N	DHC 16-12	16AF12	739LF-1-3/4	CAF-16-12N	16-DATPF-16
N2430-20-20	STDPIPE-FNPT	20-TA7-20	20-20 T2HG	20FA20N	DHC 20-20	20AF20	739LF-1-1/4-1-1/4	CAF-20-20N	20-DATPF-20
N2430-24-24	STDPIPE-FNPT	24-TA7-24	24-24 T2HG	24FA24N	DHC 24-24	24AF24	739LF-1-1/2-1/1/2	CAF-24-24N	24-DATPF-24
N2431-04-04	STDPIPE-FGA	4-TA-7-4RT	N/A#	N/A#	N/A#	N/A#	N/A#	CAF-4-4G	N/A#
N2431-06-06	STDPIPE-FGA	6-TA-7-6RT	N/A#	N/A#	N/A#	N/A#	N/A#	CAF-6-6G	N/A#
N2431-08-08	STDPIPE-FGA	8-TA-7-8RT	N/A#	N/A#	N/A#	N/A#	N/A#	CAF-8-8G	N/A#
N2440-02-02	STDPIPE-FERR	201-PC	2-2 ZPC	2PC2	DPC 2-2	2PC	767LP-1/8-1/8	CPC-2	DD-2-DPCU-2
N2440-04-02	STDPIPE-FERR	401-PC-2	2-4 ZPC	2PC4	DPC 4-2	4PC2	767LM-1/4-1/8	CPR-4-2	4-DPCU-2
N2440-04-04	STDPIPE-FERR	401-PC	4-4 ZPC	4PC4	DPC 4-4	4PC4	767LM-1/4-1/4	CPR-4	4-DPCU-4
N2440-06-02	STDPIPE-FERR	601-PC-2	2-6 ZPC	2PC6	DPC 6-2	6PC2	767LM-3/8-1/8	CPR-6-2	6-DPCU-2
N2440-06-04	STDPIPE-FERR	601-PC-4	4-6 ZPC	4PC6	DPC 6-4	6PC2	767LM-3/8-1/4	CPR-6-4	6-DPCU-4
N2440-06-06	STDPIPE-FERR	601-PC	6-6 ZPC	6PC6	DPC 6-6	6PC4	767LM-3/8-3/8	CPR-6	6-DPCU-6
N2440-08-04	STDPIPE-FERR	811-PC-4	4-8 ZPC	4PC8	DPC 8-4	8PC4	767LM-1/2-1/4	CPR-8-4	8-DPCU-4
N2440-08-06	STDPIPE-FERR	811-PC-6	6-8 ZPC	6PC8	DPC 8-6	8PC6	767LM-1/2-3/8	CPR-8-6	8-DPCU-4
N2440-08-08	STDPIPE-FERR	811-PC	8-8 ZPC	8PC8	DPC 8-8	8PC8	767LM-1/2-1/2	CPR-8	8-DPCU-8
N2440-12-08	STDPIPE-FERR	1211-PC-8	8-12 ZPC	8PC12	DPC 12-8	12PC8	767LM-3/4-1/2	CPR-12-8	12-DPCU-8
N2440-12-12	STDPIPE-FERR	1211-PC	12-12 ZPC	2PC12	DPC 12-12	12PC12	767LM-3/4-3/4	CPR-12	12-DPCU-12
N2440-16-08	STDPIPE-FERR	1611-PC-8	8-16 ZPC	8PC16	DPC 16-8	16PC8	767LM-1-1/2	CPR-16-8	16-DPCU-8
N2440-16-12	STDPIPE-FERR	1611-PC-12	12-16 ZPC	12PC16	DPC 16-12	16PC12	767LM-1-3/4	CPR-16-12	16-DPCU-12
N2440-16-16	STDPIPE-FERR	1611-PC	16-16 ZPC	16PC16	DPC 16-16	16PC16	767LM-1-1	CPR-16	16-DPCU-16
N2500-01-01	IN-IN 90	100-9	1-1 EBZ	1EE1	DLA 1	1LU	765L-1/16-1/16	CLA-1	1-DELU-1
N2500-02-02	IN-IN 90	200-9	2-2 EBZ	2EE2	DLA 2	2LU	765L-1/8-1/8	CLA-2	2-DELU-2
N2500-03-03	IN-IN 90	300-9	3-3 EBZ	3EE3	DLA 3	3LU	765L-3/16-3/16	CLA-3	3-DELU-3
N2500-04-04	IN-IN 90	400-9	4-4 EBZ	4EE4	DLA 4	4LU	765L-1/4-1/4	CLA-4	4-DELU-4
N2500-05-05	IN-IN 90	500-9	5-5 EBZ	5EE5	DLA 5	5LU	765L-5/16-5/16	CLA-5	5-DELU-5
N2500-06-06	IN-IN 90	600-9	6-6 EBZ	6EE6	DLA 6	6LU	765L-3/8-3/8	CLA-6	6-DELU-6
N2500-08-08	IN-IN 90	810-9	8-8 EBZ	8EE8	DLA 8	8LU	765L-1/2-1/2	CLA-8	8-DELU-8
N2500-10-10	IN-IN 90	1010-9	10-10 EBZ	10EE10	DLA 10	10LU	765L-5/8-5/8	CLA-10	10-DELU-10
N2500-12-12	IN-IN 90	1210-9	12-12 EBZ	12EE12	DLA 12	12LU	765L-3/4-3/4	CLA-12	12-DELU-12
N2500-14-14	IN-IN 90	1410-9	14-14 EBZ	14EE14	DLA 14	14LU	765L-7/8-7/8	CLA-14	14-DELU-14
N2500-16-16	IN-IN 90	1610-9	16-16 EBZ	16EE16	DLA 16	16LU	765L-1-1	CLA-16	16-DELU-16
N2500-20-20	IN-IN 90	2000-9	20-20 EBZ	20EE20	DLA 20	20LU	765L-1-1/4-1-1/4	CLA-20	20-DELU-20
N2500-24-24	IN-IN 90	2400-9	24-24 EBZ	24EE24	DLA 24	24LU	765L-1-1/2-1/1/2	CLA-24	24-DELU-24
N2500-32-32	IN-IN 90	3200-9	32-32 EBZ	3EE32	DLA 32	32LU	765L-2-2	CLA-32	32-DELU-32
N2501-01-01	IN-MNPT 90	100-2-1	1-1 CBZ	1MSEL1N	DLN 1-1	1LM1	769L-1/16-1/16	CLMA-1-1N	1-DME-1
N2501-01-02	IN-MNPT 90	100-2-2	1-2 CBZ	1MSEL2N	DLN 1-2	1LM2	769L-1/16-1/8	CLMA-1-2N	1-DME-2
N2501-02-02	IN-MNPT 90	200-2-2	2-2 CBZ	2MSEL2N	DLN 2-2	2LM2	769L-1/8-1/8	CLMA-2-2N	2-DME-2
N2501-02-04	IN-MNPT 90	200-2-4	2-4 CBZ	2MSEL4N	DLN 2-4	2LM4	769L-1/8-1/4	CLMA-2-4N	2-DME-4
N2501-03-02	IN-MNPT 90	300-2-2	3-2 CBZ	3MSEL2N	DLN 3-2	3LM2	769L-3/16-1/8	CLMA-3-2N	3-DME-2
N2501-03-04	IN-MNPT 90	300-2-4	3-4 CBZ	3MSEL4N	DLN 3-4	3LM4	769L-3/16-1/4	CLMA-3-4N	3-DME-4
N2501-04-02	IN-MNPT 90	400-2-2	4-2 CBZ	4MSEL2N	DLN 4-2	4LM2	769L-1/4-1/8	CLMA-4-2N	4-DME-2
N2501-04-04	IN-MNPT 90	400-2-4	4-4 CBZ	4MSEL4N	DLN 4-4	4LM4	769L-1/4-1/4	CLMA-4-4N	4-DME-4
N2501-04-06	IN-MNPT 90	400-2-6	4-6 CBZ	4MSEL6N	DLN 4-6	4LM6	769L-1/4-3/8	CLMA-4-6N	4-DME-6
N2501-04-08	IN-MNPT 90	400-2-8	4-8 CBZ	4MSEL8N	DLN 4-8	4LM8	769L-1/4-1/2	CLMA-4-8N	4-DME-8
N2501-05-02	IN-MNPT 90	500-2-2	5-2 CBZ	5MSEL2N	DLN 5-2	5LM2	769L-5/16-1/8	CLMA-5-2N	5-DME-2
N2501-05-04	IN-MNPT 90	500-2-4	5-4 CBZ	5MSEL4N	DLN 5-4	5LM4	769L-5/16-1/4	CLMA-5-4N	5-DME-4
N2501-06-02	IN-MNPT 90	600-2-2	6-2 CBZ	6MSEL2N	DLN 6-2	6LM2	769L-3/8-1/8	CLMA-6-2N	6-DME-2
N2501-06-04	IN-MNPT 90	600-2-4	6-4 CBZ	6MSEL4N	DLN 6-4	6LM4	769L-3/8-1/4	CLMA-6-4N	6-DME-4

# Cross Reference Chart

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2501-06-06	IN-MNPT 90	600-2-6	6-6 CBZ	6MSEL6N	DLN 6-6	6LM6	769L-3/8-3/8	CLMA-6-6N	6-DME-6
N2501-06-08	IN-MNPT 90	600-2-8	6-8 CBZ	6MSEL8N	DLN 6-8	6LM8	769L-3/8-1/2	CLMA-6-8N	6-DME-8
N2501-06-12	IN-MNPT 90	600-2-12	6-12 CBZ	6MSEL12N	DLN 6-12	6LM12	769L-3/8-3/4	CLMA-6-12N	6-DME-12
N2501-08-02	IN-MNPT 90	810-2-2	8-2 CBZ	8MSEL2N	DLN 8-2	8LM2	769L-1/2-1/8	CLMA-8-2N	8-DME-2
N2501-08-04	IN-MNPT 90	810-2-4	8-4 CBZ	8MSEL4N	DLN 8-4	8LM4	769L-1/2-1/4	CLMA-8-4N	8-DME-4
N2501-08-06	IN-MNPT 90	810-2-6	8-6 CBZ	8MSEL6N	DLN 8-6	8LM6	769L-1/2-3/8	CLMA-8-6N	8-DME-6
N2501-08-08	IN-MNPT 90	810-2-8	8-8 CBZ	8MSEL8N	DLN 8-8	8LM8	769L-1/2-1/2	CLMA-8-8N	8-DME-8
N2501-08-12	IN-MNPT 90	810-2-12	8-12 CBZ	8MSEL12N	DLN 8-12	8LM12	769L-1/2-3/4	CLMA-8-12N	8-DME-12
N2501-10-08	IN-MNPT 90	1010-2-8	10-8 CBZ	10MSEL8N	DLN 10-8	10LM8	769L-5/8-1/2	CLMA-10-8N	10-DME-8
N2501-12-08	IN-MNPT 90	1210-2-8	12-8 CBZ	12MSEL8N	DLN 12-8	12LM8	769L-3/4-1/2	CLMA-12-8N	12-DME-8
N2501-12-12	IN-MNPT 90	1210-2-12	12-12 CBZ	12MSEL12N	DLN 12-12	12LM12	769L-3/4-3/4	CLMA-12-12N	12-DME-12
N2501-14-12	IN-MNPT 90	1410-2-12	14-12 CBZ	14MSEL12N	DLN 14-12	14LM12	769L-7/8-3/4	CLMA-14-12N	14-DME-12
N2501-16-12	IN-MNPT 90	1610-2-12	16-12 CBZ	16MSEL12N	DLN 16-12	16LM12	769L-1/3-4	CLMA-16-12N	16-DME-12
N2501-16-16	IN-MNPT 90	1610-2-16	16-16 CBZ	16MSEL16N	DLN 16-16	16LM16	769L-1-1	CLMA-16-16N	16-DME-16
N2501-20-20	IN-MNPT 90	2000-2-20	20-20 CBZ	20MSEL20N	DLN 20-20	20LM20	769L-1/4-1/1-1/4	CLMA-20-20N	20-DME-20
N2501-24-24	IN-MNPT 90	2400-2-24	24-24 CBZ	24MSEL24N	DLN 24-24	24LM24	769L-1/1-2/1-1/2	CLMA-24-24N	24-DME-24
N2501-32-32	IN-MNPT 90	3200-2-32	32-32 CBZ	32MSEL32N	DLN 32-32	32LM32	769L-2-2	CLMA-32-32N	32-DME-32
N2502-02-02	IN-FNPT 90	200-8-2	2-2 DBZ	2FEL2N	DLF 2-2	2LF2	770L-1/8-1/8	CLF-2-2N	2-DFE-2
N2502-02-04	IN-FNPT 90	200-8-4	2-4 DBZ	2FEL4N	DLF 2-4	2LF4	770L-1/8-1/4	CLF-2-4N	2-DFE-4
N2502-03-02	IN-FNPT 90	300-8-2	3-2 DBZ	3FEL2N	DLF 3-2	3LF2	770L-3/16-1/8	CLF-3-2N	3-DFE-2
N2502-04-02	IN-FNPT 90	400-8-2	4-2 DBZ	4FEL2N	DLF 4-2	4LF2	770L-1/4-1/8	CLF-4-2N	4-DFE-2
N2502-04-04	IN-FNPT 90	400-8-4	4-4 DBZ	4FEL4N	DLF 4-4	4LF4	770L-1/4-1/4	CLF-4-4N	4-DFE-4
N2502-04-06	IN-FNPT 90	400-8-6	4-6 DBZ	4FEL6N	DLF 4-6	4LF6	770L-1/4-3/8	CLF-4-6N	4-DFE-6
N2502-04-08	IN-FNPT 90	400-8-8	4-8 DBZ	4FEL8N	DLF 4-8	4LF8	770L-1/4-1/2	CLF-4-8N	4-DFE-8
N2502-05-02	IN-FNPT 90	500-8-2	5-2 DBZ	5FEL2N	DLF 5-2	5LF2	770L-5/16-1/8	CLF-5-2N	5-DFE-2
N2502-05-04	IN-FNPT 90	500-8-4	5-4 DBZ	5FEL4N	DLF 5-4	5LF4	770L-5/16-1/4	CLF-5-4N	5-DFE-4
N2502-06-02	IN-FNPT 90	600-8-2	6-2 DBZ	6FEL2N	DLF 6-2	6LF2	770L-3/8-1/8	CLF-6-2N	6-DFE-2
N2502-06-04	IN-FNPT 90	600-8-4	6-4 DBZ	6FEL4N	DLF 6-4	6LF4	770L-3/8-1/4	CLF-6-4N	6-DFE-4
N2502-06-06	IN-FNPT 90	600-8-6	6-6 DBZ	6FEL6N	DLF 6-6	6LF6	770L-3/8-3/8	CLF-6-6N	6-DFE-6
N2502-06-08	IN-FNPT 90	600-8-8	6-8 DBZ	6FEL8N	DLF 6-8	6LF8	770L-3/8-1/2	CLF-6-8N	6-DFE-8
N2502-08-04	IN-FNPT 90	810-8-4	8-4 DBZ	8FEL4N	DLF 8-4	8LF4	770L-1/2-1/4	CLF-8-4N	8-DFE-4
N2502-08-06	IN-FNPT 90	810-8-6	8-6 DBZ	8FEL6N	DLF 8-6	8LF6	770L-1/2-3/8	CLF-8-6N	8-DFE-6
N2502-08-08	IN-FNPT 90	810-8-8	8-8 DBZ	8FEL8N	DLF 8-8	8LF8	770L-1/2-1/2	CLF-8-8N	8-DFE-8
N2502-10-06	IN-FNPT 90	1010-8-6	10-6 DBZ	10FEL6N	DLF 10-6	10LF6	770L-5/8-3/8	CLF-10-6N	10-DFE-6
N2502-10-08	IN-FNPT 90	1010-8-8	10-8 DBZ	10FEL8N	DLF 10-8	10LF8	770L-5/8-1/2	CLF-10-8N	10-DFE-8
N2502-12-08	IN-FNPT 90	1210-8-8	12-8 DBZ	12FEL8N	DLF 12-8	12LF8	770L-3/4-1/2	CLF-12-8N	12-DFE-8
N2502-12-12	IN-FNPT 90	1210-8-12	12-12 DBZ	12FEL12N	DLF 12-12	12LF12	770L-3/4-3/4	CLF-12-12N	12-DFE-12
N2502-14-12	IN-FNPT 90	1410-8-12	14-12 DBZ	14FEL12N	DLF 14-12	14LF12	770L-7/8-3/4	CLF-14-12N	14-DFE-12
N2502-16-12	IN-FNPT 90	1610-8-12	16-12 DBZ	16FEL12N	DLF 16-12	16LF12	770L-1-3/4	CLF-16-12N	16-DFE-12
N2502-16-16	IN-FNPT 90	1610-8-16	16-16 DBZ	16FEL16N	DLF 16-16	16LF16	770L-1-1	CLF-16-16N	16-DFE-16
N2503-02-02	IN-FNPT 90	200-5-2	2-2 VBZ	2MVEL2N	N/A#	N/A#	N/A#	CLMB-2-2N	N/A#
N2503-04-02	IN-MNPT 45	400-5-2	4-2 VBZ	4MVEL2N	N/A#	N/A#	N/A#	CLMB-4-2N	N/A#
N2503-04-04	IN-MNPT 45	400-5-4	4-4 VBZ	4MVEL4N	N/A#	N/A#	N/A#	CLMB-4-4N	N/A#
N2503-06-02	IN-MNPT 45	600-5-2	6-2 VBZ	6MVEL2N	N/A#	N/A#	N/A#	CLMB-6-2N	N/A#
N2503-06-04	IN-MNPT 45	600-5-4	6-4 VBZ	6MVEL4N	N/A#	N/A#	N/A#	CLMB-6-4N	N/A#
N2503-06-06	IN-MNPT 45	600-5-6	6-6 VBZ	6MVEL6N	N/A#	N/A#	N/A#	CLMB-6-6N	N/A#
N2503-08-06	IN-MNPT 45	810-5-6	8-6 VBZ	8MVEL6N	N/A#	N/A#	N/A#	CLMB-8-6N	N/A#
N2503-08-08	IN-MNPT 45	810-5-8	8-8 VBZ	8MVEL8N	N/A#	N/A#	N/A#	CLMB-8-8N	N/A#
N2503-12-12	IN-MNPT 45	1210-5-12	12-12 VBZ	12MVEL12N	N/A#	N/A#	N/A#	CLMB-12-12N	N/A#
N2503-16-16	IN-MNPT 45	1610-5-16	16-16 VBZ	16MVEL16N	N/A#	N/A#	N/A#	CLMB-16-16N	N/A#
N2525-04-02	IN-BW 90	400-2-2W	2-1/8 ZEBW2	4-1/8 Z-SSELW2	DLB 4-2	4LBW2	769LN-1/4-1/8	CLW-2-2P	4-STBWE-2
N2525-04-04	IN-BW 90	400-2-4W	4-1/4 ZEBW2	4-1/4 Z-SSELW2	DLB 4-4	4LBW4	769LN-1/4-1/4	CLW-4-4P	4-STBWE-4
N2525-06-04	IN-BW 90	600-2-4W	6-1/4 ZEBW2	6-1/4 Z-SSELW2	DLB 6-4	6LBW4	769LN-3/8-1/4	CLW-6-4P	6-STBWE-4
N2525-08-08	IN-BW 90	810-2-8W	8-1/2 ZEBW2	8-1/2 Z-SSELW2	DLB 8-8	8LBW8	769LN-1/2-1/2	CLW-8-8P	8-STBWE-8
N2525-12-12	IN-BW 90	1210-2-12W	12-3/4 ZEBW2	12-3/4 Z-SSELW2	DLB 12-12	12LBW12	769LN-3/4-3/4	CLW-12-12P	12-STBWE-12
N2525-16-16	IN-BW 90	1610-2-16W	16-1 ZEBW2	16-1 Z-SSELW2	DLB 16-16	16LBW16	769LN-1-1	CLW-16-16P	16-STBWE-16
N2525-20-20	IN-BW 90	2000-2-20W	20-1-1/4 ZEBW2	20-1-1/4 Z-SSELW2	DLB 20-20	20LBW20	769LN-1-1/4-1-1/4	CLW-20-20P	20-STBWE-20
N2525-24-24	IN-BW 90	2400-2-24W	24-1-1/2 ZEBW2	24-1-1/2 Z-SSELW2	DLB 24-24	24LBW24	769LN-1-1/2-1/2/1	CLW-24-24P	24-STBWE-24
N2526-04-04	IN-SW 90	400-9-4W	4-4 ZEWB	4-4 Z-SSELW	DLW 4-4	4LW4	769LN-1/4-1/4	CLSW-4-4	4-DTSWE-4
N2526-06-06	IN-SW 90	600-9-6W	6-6 ZEWB	6-6 Z-SSELW	DLW 6-6	6LW6	769LN-3/8-3/8	CLSW-6-6	6-DTSWE-6
N2526-08-08	IN-SW 90	810-9-8W	8-8 ZEWB	8-8 Z-SSELW	DLW 8-8	8LW8	769LN-1/2-1/2	CLSW-8-8	8-DTSWE-8
N2526-12-12	IN-SW 90	1210-9-12W	12-12 ZEWB	12-12 Z-SSELW	DLW 12-12	12LW12	769LN-3/4-3/4	CLSW-12-12	12-DTSWE-12
N2526-16-16	IN-SW 90	1610-9-16W	16-16 ZEWB	16-16 Z-SSELW	DLW 16-16	16LW16	769LN-1-1	CLSW-16-16	16-DTSWE-16
N2526-20-20	IN-SW 90	2000-9-20W	20-20 ZEWB	20-20 Z-SSELW	DLW 20-20	20LW20	769LN-1-1/4-1-1/4	CLSW-20-20	20-DTSWE-20
N2526-24-24	IN-SW 90	2400-9-24W	24-24 ZEWB	24-24 Z-SSELW	DLW 24-24	24LW24	769LN-1-1/2-1/1/2	CLSW-24-24	24-DTSWE-24
N2601-02-02	IN-IN-MNPT	200-3TTM	2-2-2 SBZ	2MBT2N	DTN 2-2	2TTM2	772L-1/8-1/8	CBTM-2-2N	2-DTM-2
N2601-02-04	IN-IN-MNPT	200-3-4TTM	2-2-4 SBZ	2MBT4N	DTN 2-4	2TTM4	772L-1/8-1/4	CBTM-2-4N	2-DTM-4
N2601-04-02	IN-IN-MNPT	400-3TTM	4-4-2 SBZ	4MBT2N	DTN 4-2	4TTM2	772L-1/4-1/8	CBTM-4-2N	4-DTM-2
N2601-04-04	IN-IN-MNPT	400-3-4TTM	4-4-4 SBZ	4MBT4N	DTN 4-4	4TTM4	772L-1/4-1/4	CBTM-4-4N	4-DTM-4
N2601-04-06	IN-IN-MNPT	400-3-6TTM	4-4-6 SBZ	4MBT6N	DTN 4-6	4TTM6	772L-1/4-3/8	CBTM-4-6N	4-DTM-6
N2601-04-08	IN-IN-MNPT	400-3-8TTM	4-4-8 SBZ	4MBT8N	DTN 4-8	4TTM8	772L-1/4-1/2	CBTM-4-8N	4-DTM-8
N2601-06-04	IN-IN-MNPT	600-3-4TTM	6-6-4 SBZ	6MBT4N	DTN 6-4	6TTM4	772L-3/8-1/4	CBTM-6-4N	6-DTM-4
N2601-06-06	IN-IN-MNPT	600-3-6TTM	6-6-6 SBZ	6MBT6N	DTN 6-6	6TTM6	772L-3/8-3/8	CBTM-6-6N	6-DTM-6
N2601-06-08	IN-IN-MNPT	600-3-8TTM	6-6-8 SBZ	6MBT8N	DTN 6-8	6TTM8	772L-3/8-1/2	CBTM-6-8N	6-DTM-8
N2601-08-04	IN-IN-MNPT	810-3-4TTM	8-8-4 SBZ	8MBT4N	DTN 8-4	8TTM4	772L-1/2-1/4	CBTM-8-4N	8-DTM-4

B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2601-08-06	IN-IN-MNPT	810-3TTM	8-8-6 SBZ	8MBT6N	DTN 8-6	8TTM6	772L-1/2-3/8	CBTM-8-6N	8-DTTM-6
N2601-08-08	IN-IN-MNPT	810-3-8TTM	8-8-8 SBZ	8MBT8N	DTN 8-8	8TTM8	772L-1/2-1/2	CBTM-8-8N	8-DTTM-8
N2601-10-08	IN-IN-MNPT	1010-3TTM	10-10-8 SBZ	10MBT8N	DTN 10-8	10TTM8	772L-5/8-1/2	CBTM-10-8N	10-DTTM-8
N2601-12-12-08	IN-IN-MNPT	1210-3-8TTM	12-12-8 SBZ	12MBT8N	DTN 12-8	12TTM8	772L-3/4-1/2	CBTM-12-8N	12-DTTM-8
N2601-12-12-12	IN-IN-MNPT	1210-3TTM	12-12-12 SBZ	12MBT12N	DTN 12-12	12TTM12	772L-3/4-3/4	CBTM-12-12N	12-DTTM-12
N2601-16-12	IN-IN-MNPT	1610-3-12TTM	16-16-12 SBZ	16MBT12N	DTN 16-12	16TTM12	772L-1-3/4	CBTM-16-12N	16-DTTM-12
N2601-16-16	IN-IN-MNPT	1610-3TTM	16-16-16 SBZ	16MBT16N	DTN 16-16	16TTM16	772L-1-1	CBTM-16-16N	16-DTTM-16
N2601-20-20	IN-IN-MNPT	2000-3-20TTM	20-20-20 SBZ	20MBT20N	DTN 20-20	20TTM20	772L-1/4-1/4-1/4	CBTM-20-20N	20-DTTM-20
N2601-24-24-24	IN-IN-MNPT	2400-3-24TTM	24-24-24 SBZ	24MBT24N	DTN 24-24	24TTM24	772L-1/2-1-1/4	CBTM-24-24N	24-DTTM-24
N2602-02-02	IN-IN-FNPT	200-3TTF	2-2-2 OBZ	2FBT2N	DTH 2-2	2TTF2	772L-1/8-1/8	CBTF-2-2N	2-DTTF-2
N2602-04-02	IN-IN-FNPT	400-3TTF	4-4-2 OBZ	4FBT2N	DTH 4-2	4TTF2	772L-1/4-1/8	CBTF-4-2N	4-DTTF-2
N2602-04-04	IN-IN-FNPT	400-3-4TTF	4-4-4 OBZ	4FBT4N	DTH 4-4	4TTF4	772L-1/4-1/4	CBTF-4-4N	4-DTTF-4
N2602-06-04	IN-IN-FNPT	600-3TTF	6-6-4 OBZ	6FBT4N	DTH 6-4	6TTF4	772L-3/8-1/4	CBTF-6-4N	6-DTTF-4
N2602-06-06	IN-IN-FNPT	600-3-6TTF	6-6-6 OBZ	6FBT6N	DTH 6-6	6TTF6	772L-3/8-3/8	CBTF-6-6N	6-DTTF-6
N2602-06-08	IN-IN-FNPT	600-3-8TTF	6-6-8 OBZ	6FBT8N	DTH 6-8	6TTF8	772L-3/8-1/2	CBTF-6-8N	6-DTTF-8
N2602-08-04	IN-IN-FNPT	810-3-4TTF	8-8-4 OBZ	8FBT4N	DTH 8-4	8TTF4	772L-1/2-1/4	CBTF-8-4N	8-DTTF-4
N2602-08-06	IN-IN-FNPT	810-3TTF	8-8-6 OBZ	8FBT6N	DTH 8-6	8TTF6	772L-1/2-3/8	CBTF-8-6N	8-DTTF-6
N2602-08-08	IN-IN-FNPT	810-3-8TTF	8-8-8 OBZ	8FBT8N	DTH 8-8	8TTF8	772L-1/2-1/2	CBTF-8-8N	8-DTTF-8
N2602-12-12	IN-IN-FNPT	1210-3TTF	12-12-12 OBZ	12FBT12N	DTH 12-12	12TTF12	772L-3/4-3/4	CBTF-12-12N	12-DTTF-12
N2602-16-12	IN-IN-FNPT	1610-3TTF	16-16-12 OBZ	16FBT12N	DTH 16-12	16TTF12	772L-1-3/4	CBTF-16-12N	16-DTTF-12
N2602-16-16	IN-IN-FNPT	1610-3-16TTF	16-16-16 OBZ	16FBT16N	DTH 16-16	16TTF16	772L-1-1	CBTF-16-16N	16-DTTF-16
N2603-02-02	IN-IN-IN	200-3	2-2-2 JBZ	2ET2	DTA 2	2TTT	764L-1/8	CTA-2	2-DTTT-2
N2603-03-03	IN-IN-IN	300-3	3-3-3 JBZ	3ET3	DTA 3	3TTT	764L-3/16	CTA-3	3-DTTT-3
N2603-04-04	IN-IN-IN	400-3	4-4-4 JBZ	4ET4	DTA 4	4TTT	764L-1/4	CTA-4	4-DTTT-4
N2603-05-05	IN-IN-IN	500-3	5-5-5 JBZ	5ET5	DTA 5	5TTT	764L-5/16	CTA-5	5-DTTT-5
N2603-06-04	IN-IN-IN	600-3-4-4	6-4-4 JBZ	6-4-4 JLZ	DTR 6-4-4	N/A#	764LR-3/8-1/4-1/4	CTR-6-4-4	6-DTTT-4-4
N2603-06-06	IN-IN-IN	600-3-4-6	6-4-6 JBZ	6-4-6 JLZ	DTR 6-4-6	N/A#	764LR-3/8-1/4-3/8	CTR-6-4-6	6-DTTT-4-6
N2603-06-04	IN-IN-IN	600-3-6-4	6-6-4 JBZ	6-6-4 JLZ	DTR 6-6-4	N/A#	764LR-3/8-3/8-1/4	CTR-6-6-4	6-DTTT-6-4
N2603-06-06	IN-IN-IN	600-3	6-6-6 JBZ	6ET6	DTA 6	6TTT	764L-3/8	CTA-6	6-DTTT-6
N2603-08-04	IN-IN-IN	810-3-4-4	8-4-4 JBZ	8-4-4 JLZ	DTR 8-4-4	N/A#	764LR-1/2-1/4-1/4	CTR-8-4-4	8-DTTT-4-4
N2603-08-08	IN-IN-IN	810-3-4-8	8-4-8 JBZ	8-4-8 JLZ	DTR 8-4-8	N/A#	764LR-1/2-1/4-1/2	CTR-8-4-8	8-DTTT-64-8
N2603-08-06	IN-IN-IN	810-3-6-6	8-6-6 JBZ	8-6-6 JLZ	DTR 8-6-6	N/A#	764LR-1/2-3/8-3/8	CTR-8-6-6	8-DTTT-6-6
N2603-08-08	IN-IN-IN	810-3-6-8	8-6-8 JBZ	8-6-8 JLZ	DTR 8-6-8	N/A#	764LR-1/2-3/8-1/2	CTR-8-6-8	8-DTTT-6-8
N2603-08-04	IN-IN-IN	810-3-8-4	8-8-4 JBZ	8-8-4 JLZ	DTR 8-8-4	N/A#	764LR-1/2-1/2-1/4	CTR-8-8-4	8-DTTT-8-4
N2603-08-06	IN-IN-IN	810-3-8-6	8-8-6 JBZ	8-8-6 JLZ	DTR 8-8-6	N/A#	764LR-1/2-1/2-3/8	CTR-8-8-6	8-DTTT-8-6
N2603-08-08	IN-IN-IN	810-3	8-8-8 JBZ	8ET8	DTA 8	8TTT	764L-1/2	CTA-8	8-DTTT-8
N2603-10-10-10	IN-IN-IN	1010-3	10-10-10 JBZ	10 ET10	DTA 10	10TTT	764L-5/8	CTA-10	10-DTTT-10
N2603-12-06-06	IN-IN-IN	1210-3-6-6	12-6-6 JBZ	12-6-6 JLZ	DTR 12-6-6	N/A#	764LR-3/4-3/8-3/8	CTR-12-6-6	12-DTTT-6-6
N2603-12-06-12	IN-IN-IN	1210-3-6-12	12-6-12 JBZ	12-6-12 JLZ	DTR 12-6-12	N/A#	764LR-3/4-3/8-3/4	CTR-12-6-12	12-DTTT-6-12
N2603-12-08-08	IN-IN-IN	1210-3-8-8	12-8-8 JBZ	12-8-8 JLZ	DTR 12-8-8	N/A#	764LR-3/4-1/2-1/2	CTR-12-8-8	12-DTTT-8-8
N2603-12-08-12	IN-IN-IN	1210-3-8-12	12-8-12 JBZ	12-8-12 JLZ	DTR 12-8-12	N/A#	764LR-3/4-1/2-3/4	CTR-12-8-12	12-DTTT-8-12
N2603-12-12-06	IN-IN-IN	1210-3-12-6	12-12-6 JBZ	12-12-6 JLZ	DTR 12-12-6	N/A#	764LR-3/4-3/4-3/8	CTR-12-12-6	12-DTTT-12-6
N2603-12-12-08	IN-IN-IN	1210-3-12-8	12-12-8 JBZ	12-12-8 JLZ	DTR 12-12-8	N/A#	764LR-3/4-3/4-1/2	CTR-12-12-8	12-DTTT-12-8
N2603-12-12-12	IN-IN-IN	1210-3	12-12-12 JBZ	12ET12	DTA 12	12TTT	764L-3/4	CTA-12	12-DTTT-12
N2603-14-14-14	IN-IN-IN	1410-3	14-14-14 JBZ	14ET14	DTA 14	14TTT	764L-7/8	CTA-14	14-DTTT-14
N2603-16-06	IN-IN-IN	1610-3-6-6	16-6-6 JBZ	16-6-6 JLZ	DTR 16-6-6	N/A#	764LR-1-3/8-3/8	CTR-16-6-6	16-DTTT-6-6
N2603-16-06-16	IN-IN-IN	1610-3-6-16	16-6-16 JBZ	16-6-16 JLZ	DTR 16-6-16	N/A#	764LR-1-3-1/8	CTR-16-6-16	16-DTTT-6-16
N2603-16-08-08	IN-IN-IN	1610-3-8-8	16-8-8 JBZ	16-8-8 JLZ	DTR 16-8-8	N/A#	764LR-1-1/2-1/2	CTR-16-8-8	16-DTTT-8-8
N2603-16-08-16	IN-IN-IN	1610-3-8-16	16-8-16 JBZ	16-8-16 JLZ	DTR 16-8-16	N/A#	764LR-1-1/2-1	CTR-16-8-16	16-DTTT-8-16
N2603-16-12-12	IN-IN-IN	1610-3-12-12	16-12-12 JBZ	16-12-12 JLZ	DTR 16-12-12	N/A#	764LR-1-3/4-3/4	CTR-16-12-12	16-DTTT-12-12
N2603-16-12-16	IN-IN-IN	1610-3-12-16	16-12-16 JBZ	16-12-16 JLZ	DTR 16-12-16	N/A#	764LR-1-3/4-1	CTR-16-12-16	16-DTTT-12-16
N2603-16-16-06	IN-IN-IN	1610-3-16-6	16-16-6 JBZ	16-16-6 JLZ	DTR 16-16-6	N/A#	764LR-1-1-3/8	CTR-16-16-6	16-DTTT-16-6
N2603-16-16-08	IN-IN-IN	1610-3-16-8	16-16-8 JBZ	16-16-8 JLZ	DTR 16-16-8	N/A#	764LR-1-1-1/2	CTR-16-16-8	16-DTTT-16-8
N2603-16-16-12	IN-IN-IN	1610-3-16-12	16-16-12 JBZ	16-16-12 JLZ	DTR 16-16-12	N/A#	764LR-1-1-3/4	CTR-16-16-12	16-DTTT-16-12
N2603-16-16-16	IN-IN-IN	1610-3	16-16-16 JBZ	16ET16	DTA 16	16TTT	764L-1	CTA-16	16-DTTT-16
N2603-20-16-16	IN-IN-IN	2000-3-16-16	20-16-16 JBZ	20-16-16 JLZ	DTR 20-16-16	N/A#	764LR-1-1/4-1-1	CTR-20-16-16	20-DTTT-16-16
N2603-20-16-20	IN-IN-IN	2000-3-16-20	20-16-20 JBZ	20-16-20 JLZ	DTR 20-16-20	N/A#	764LR-1-1/4-1-1/80	CTR-20-16-20	20-DTTT-16-20
N2603-20-20-16	IN-IN-IN	2000-3-20-16	20-20-16 JBZ	20-20-16 JLZ	DTR 20-20-16	N/A#	764LR-1-1/4-1-1/4-1	CTR-20-20-16	20-DTTT-20-16
N2603-20-20-20	IN-IN-IN	2000-3	20-20-20 JBZ	20ET20	DTA 20	20TTT	764L-1/4	CTA-20	20-DTTT-20
N2603-24-16-16	IN-IN-IN	2400-3-16-16	24-16-16 JBZ	24-16-16 JLZ	DTR 24-16-16	N/A#	764LR-1-1/2-1-1	CTR-24-16-16	24-DTTT-16-16
N2603-24-16-24	IN-IN-IN	2400-3-16-24	24-16-24 JBZ	24-16-24 JLZ	DTR 24-16-24	N/A#	764LR-1-1/2-1-1/14	CTR-24-16-24	24-DTTT-16-24
N2603-24-24-16	IN-IN-IN	2400-3-16-16	24-24-16 JBZ	24-24-16 JLZ	DTR 24-24-16	N/A#	764LR-1-1/2-1/2-1	CTR-24-24-16	24-DTTT-24-16
N2603-24-24-24	IN-IN-IN	2400-3	24-24-24 JBZ	24ET24	DTA 24	24TTT	764L-1/2	CTA-24	24-DTTT-24
N2603-32-32-32	IN-IN-IN	3200-3	32-32-32 JBZ	32ET32	DTA 32	32TTT	764L-2	CTA-32	32-DTTT-32
N2605-02-02-02	IN-MNPT-IN	200-3-3MT	2-2-2 RBZ	2MRT2N	DTK 2-2	2TMT2	771L-1/8-1/8	CTRM-2-2N	2-DTMT-2
N2605-02-04-02	IN-MNPT-IN	200-3-4TMT	2-4-2 RBZ	2MRT4N	DTK 2-4	2TMT4	771L-1/8-1/4	CTRM-2-4N	2-DTMT-4
N2605-04-02-04	IN-MNPT-IN	400-3MT	4-2-2 RBZ	4MRT2N	DTK 4-2	4TMT2	771L-1/4-1/8	CTRM-4-2N	4-DTMT-2
N2605-04-04-04	IN-MNPT-IN	400-3-4TMT	4-4-4 RBZ	4MRT4N	DTK 4-4	4TMT4	771L-1/4-1/4	CTRM-4-4N	4-DTMT-4
N2605-04-06-04	IN-MNPT-IN	400-3-6TMT	4-6-4 RBZ	4MRT6N	DTK 4-6	4TMT6	771L-1/4-3/8	CTRM-4-6N	4-DTMT-6
N2605-04-08-04	IN-MNPT-IN	400-3-8TMT	4-8-4 RBZ	4MRT8N	DTK 4-8	4TMT8	771L-1/4-1/2	CTRM-4-8N	4-DTMT-8
N2605-06-06-06	IN-MNPT-IN	600-3TMT	6-4-6 RBZ	6MRT4N	DTK 6-4	6TMT4	771L-3/8-1/4	CTRM-6-4N	6-DTMT-4
N2605-06-06-06	IN-MNPT-IN	600-3-6TMT	6-6-6 RBZ	6MRT6N	DTK 6-6	6TMT6	771L-3/8-3/8	CTRM-6-6N	6-DTMT-6
N2605-06-08-06	IN-MNPT-IN	600-3-8TMT	6-8-6 RBZ	6MRT8N	DTK 6-8	6TMT8	771L-3/8-1/2	CTRM-6-8N	6-DTMT-8
N2605-08-04-08	IN-MNPT-IN	810-3TMT	8-4-8 RBZ	8MRT4N	DTK 8-4	8TMT4	771L-1/2-1/4	CTRM-8-4N	8-DTMT-4
N2605-08-06-08	IN-MNPT-IN	810-3MT	8-6-8 RBZ	8MRT6N	DTK 8-6	8TMT6	771L-1/2-3/8	CTRM-8-6N	8-DTMT-6

# Cross Reference Chart

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2605-08-08	IN-MNPT-IN	810-3-8TMT	8-8 RBZ	8MRT8N	DTK 8-8	8TMT8	771L-1/2-1/2	CRTM-8N	8-DTMT-8
N2605-10-08-10	IN-MNPT-IN	1010-3TMT	10-8 RBZ	10MRT8N	DTK 10-8	10TMT8	771L-5/8-1/2	CRTM-10-8N	10-DTMT-8
N2605-12-08-12	IN-MNPT-IN	1210-3-8TMT	12-8 RBZ	12MRT8N	DTK 12-8	12TMT8	771L-3/4-1/2	CRTM-12-8N	12-DTMT-8
N2605-12-12-12	IN-MNPT-IN	1210-3TMT	12-12 RBZ	12MRT12N	DTK 12-12	12TMT12	771L-3/4-3/4	CRTM-12-12N	12-DTMT-12
N2605-16-12-16	IN-MNPT-IN	1610-3-12TMT	16-12 RBZ	16MRT12N	DTK 16-12	16TMT12	771L-1-3/4	CRTM-16-12N	16-DTMT-12
N2605-16-16-16	IN-MNPT-IN	1610-3TMT	16-16 RBZ	16MRT16N	DTK 16-16	16TMT16	771L-1-1	CRTM-16-16N	16-DTMT-16
N2605-20-20-20	IN-MNPT-IN	2000-3TMT	20-20 RBZ	20MRT20N	DTK 20-20	20TMT20	771L-1/4-11/4	CRTM-20-20N	20-DTMT-20
N2605-24-24-24	IN-MNPT-IN	2400-3TMT	24-24 RBZ	24MRT24N	DTK 24-24	24TMT24	771L-1/2 1/1/2	CRTM-24-24N	24-DTMT-24
N2606-02-02-02	IN-FNPT-IN	200-3-2-TFT	2-2-2 MBZ	2FRT2N	DTF 2-2	2FT2	771L-1/8-1/8	CRTF-2-2N	2-DTFT-2
N2606-04-02-04	IN-FNPT-IN	400-3TFT	4-2-4 MBZ	4FRT2N	DTF 4-2	4FT2	771L-1/4-1/8	CRTF-4-2N	4-DTFT-2
N2606-04-04-04	IN-FNPT-IN	400-3-4TFT	4-4-4 MBZ	4FRT4N	DTF 4-4	4FT4	771L-1/4-1/4	CRTF-4-4N	4-DTFT-4
N2606-06-04-06	IN-FNPT-IN	600-3TFT	6-4-6 MBZ	6FRT4N	DTF 6-4	6FT4	771L-3/8-1/4	CRTF-6-4N	6-DTFT-4
N2606-06-06-06	IN-FNPT-IN	600-3-6TFT	6-6-6 MBZ	6FRT6N	DTF 6-6	6FT6	771L-3/8-3/8	CRTF-6-6N	6-DTFT-6
N2606-08-06-08	IN-FNPT-IN	810-3TFT	8-6-8 MBZ	8FRT6N	DTF 8-6	8FT6	771L-1/2-3/8	CRTF-8-6N	8-DTFT-6
N2606-08-08-08	IN-FNPT-IN	810-3-8TFT	8-8-8 MBZ	8FRT8N	DTF 8-8	8FT8	771L-1/2-1/2	CRTF-8-8N	8-DTFT-8
N2606-12-12-12	IN-FNPT-IN	1210-3TFT	12-12 RBZ	12FRT12N	DTF 12-12	12FT12	771L-3/4-3/4	CRTF-12-12N	12-DTFT-12
N2606-16-12-16	IN-FNPT-IN	1610-3-12TFT	16-12 RBZ	16FRT12N	DTF 16-12	16FT12	771L-1-3/4	CRTF-16-12N	16-DTFT-12
N2606-16-16-16	IN-FNPT-IN	1610-3TFT	16-16 RBZ	16FRT16N	DTF 16-16	16FT16	771L-1-1	CRTF-16-16N	16-DTFT-16
N2650-02-02-02-02	IN-IN-IN-IN	200-4	2 KBZ	2ECR2	DXA 2	2C	7102L-1/8	CXA-2	2-DCR
N2650-04-04-04-04	IN-IN-IN-IN	400-4	4 KBZ	4ECR4	DXA 4	4C	7102L-1/4	CXA-4	4-DCR
N2650-06-06-06-06	IN-IN-IN-IN	600-4	6 KBZ	6ECR6	DXA 6	6C	7102L-3/8	CXA-6	6-DCR
N2650-08-08-08-08	IN-IN-IN-IN	810-4	8 KBZ	8ECR8	DXA 8	8C	7102L-1/2	CXA-8	8-DCR
N2650-12-12-12-12	IN-IN-IN-IN	1210-4	12 KBZ	12ECR12	DXA 12	12C	7102L-3/4	CXA-12	12-DCR
N2650-16-16-16-16	IN-IN-IN-IN	1610-4	16 KBZ	16ECR16	DXA 16	16C	7102L-1	CXA-16	16-DCR
N2700-LN-01-01	INBH-IN	100-61	1-1 WBZ	1MBC1N	DSU 1	1BU	774L-1/16-1/16	CBU-1	1-DBHU-1
N2700-LN-02-02	INBH-IN	200-61	2-2 WBZ	2MBC2N	DSU 2	2BU	774L-1/8-1/8	CBU-2	2-DBHU-2
N2700-LN-03-03	INBH-IN	300-61	3-3 WBZ	3MBC3N	DSU 3	3 BU	774L-16/16-3/16	CBU-3	3-DBHU-3
N2700-LN-04-02	INBH-IN	400-61-2	4-2 WBZ	4MBC2N	DSU 4-2	4BU2	774L-1/4-1/8	CBU-4-2	4-DBHU-2
N2700-LN-04-04	INBH-IN	400-61	4-4 WBZ	4MBC4N	DSU 4	4BU	774L-1/4-1/4	CBU-4	4-DBHU-4
N2700-LN-05-05	INBH-IN	500-61	5-5 WBZ	5MBC5	DSU 5	5BU	774L-5/16-5/16	CBU-5	5-DBHU-5
N2700-LN-06-04	INBH-IN	600-61-4	6-4 WBZ	6MBC4	DSU 6-4	6BU4	774L-3/8-1/4	CBUR-6-4	6-DBHU-4
N2700-LN-06-06	INBH-IN	600-61	6-6 WBZ	6MBC6	DSU 6	6BU6	774L-3/8-3/8	CBU-6	6-DBHU-6
N2700-LN-08-04	INBH-IN	810-61-4	8-4 WBZ	8MBC4	DSU 8-4	8BU4	774L-1/2-1/4	CBUR-8-4	8-DBHU-4
N2700-LN-08-06	INBH-IN	810-61-6	8-6 WBZ	8MBC6N	DSU 8-6	8BU6	774L-1/2-3/8	CBUR-8-6	8-DBHU-6
N2700-LN-08-08	INBH-IN	810-61	8-8 WBZ	8MBC8N	DSU 8	8BU	774L-1/2-1/2	CBU-8	8-DBHU-8
N2700-LN-10-10	INBH-IN	1010-61	10-10 WBZ	10BC10	DSU 1	10BU	774L-5/8-5/8	CBU-10	10-DBHU-10
N2700-LN-12-12	INBH-IN	1210-61	12-12 WBZ	12BC12	DSU 12	12BU	774L-3/4-3/4	CBU-12	12-DBHU-12
N2700-LN-16-16	INBH-IN	1610-61	16-16 WBZ	16BC16	DSU 16	16BU	774L-1	CBU-16	16-DBHU-16
N2700-LN-20-20	INBH-IN	2000-61	20-20 WBZ	20BC20	DSU 20	20BU	774L-1/14-1/14	CBU-20	20-DBHU-20
N2700-LN-24-24	INBH-IN	2400-61	24-24 WBZ	24BC24	DSU 24	24BU	774L-11/2-11/2	CBU-24	24-DBHU-24
N2700-LN-32-32	INBH-IN	3200-61	32-32 WBZ	32BC32	DSU 32	32BU	774L-2/2	CBU-32	32-DBHU-32
N2701-LN-02-02	INBH-IN 90	N/A#	N/A#	DSL 2	N/A#	N/A#	N/A#	N/A#	N/A#
N2701-LN-04-04	INBH-IN 90	N/A#	N/A#	DSL 4	N/A#	N/A#	N/A#	N/A#	N/A#
N2701-LN-06-06	INBH-IN 90	N/A#	N/A#	DSL 6	N/A#	N/A#	N/A#	N/A#	N/A#
N2701-LN-08-08	INBH-IN 90	N/A#	N/A#	DSL 8	N/A#	N/A#	N/A#	N/A#	N/A#
N2701-LN-12-12	INBH-IN 90	N/A#	N/A#	DSL 12	N/A#	N/A#	N/A#	N/A#	N/A#
N2701-LN-16-16	INBH-IN 90	N/A#	N/A#	DSL 16	N/A#	N/A#	N/A#	N/A#	N/A#
N2705-LN-02-02	INBH-FNPT	200-71-2	2-2 GH2BZ	2FBC2N	DSS 2-2	2BCF2	774L-1/8-1/8	CBFC-2-2N	2-DBFP-2
N2705-LN-04-02	INBH-FNPT	400-71-2	4-2 GH2BZ	4FBC2N	DSS 4-2	4BCF2	774L-1/4-1/8	CBFC-4-2N	4-DBFP-2
N2705-LN-04-04	INBH-FNPT	400-71-4	4-4 GH2BZ	4FBC4N	DSS 4-4	4BCF4	774L-1/4-1/4	CBFC-4-4N	4-DBFP-4
N2705-LN-06-04	INBH-FNPT	600-71-4	6-4 GH2BZ	6FBC4N	DSS 6-4	6BCF4	774L-3/8-1/4	CBFC-6-4N	6-DBFP-4
N2705-LN-08-06	INBH-FNPT	810-71-6	8-6 GH2BZ	8FBC6N	DSS 8-6	8BCF6	774L-1/2-3/8	CBFC-8-6N	8-DBFP-6
N2705-LN-08-08	INBH-FNPT	810-71-8	8-8 GH2BZ	8FBC8N	DSS 8-8	8BCF8	774L-1/2-1/2	CBFC-8-8N	8-DBFP-8
N2705-LN-10-08	INBH-FNPT	1010-71-8	10-8 GH2BZ	10FBC8N	DSS 10-8	10BCF8	774L-5/8-1/2	CBFC-10-8N	10-DBFP-8
N2705-LN-12-08	INBH-FNPT	1210-71-8	12-8 GH2BZ	12FBC8N	DSS 12-8	12BCF8	774L-3/4-1/2	#N/A	12-DBFP-8
N2705-LN-12-12	INBH-FNPT	1210-71-12	12-12 GH2BZ	12FBC12N	DSS 12-12	12BCF12	774L-3/4-3/4	CBFC-12-12N	12-DBFP-12
N2705-LN-16-12	INBH-FNPT	1610-71-12	16-12 GH2BZ	16FBC12N	DSS 16-12	16BCF12	774L-1-3/4	#N/A	16-DBFP-12
N2705-LN-16-16	INBH-FNPT	1610-71-16	16-16 GH2BZ	16FBC16N	DSS 16-16	16BCF16	774L-1-1	CBFC-16-16N	16-DBFP-16
N2705-LN-20-20	INBH-FNPT	2000-71-20	20-20 GH2BZ	20FBC20N	DSS 20-20	20BCF20	774L-11/4-1/14	CBFC-20-20N	20-DBFP-20
N2705-LN-24-24	INBH-FNPT	2400-71-24	24-24 GH2BZ	24FBC24N	DSS 24-24	24BCF24	774L-11/2-1/2	CBFC-24-24N	24-DBFP-24
N2706-LN-02-02	INBH-MNPT	200-11-2	2-2 FH2BZ	2MBC2N	DSC 2-2	2BCM2	774LM-1/8-1/8	CBMC-2-2N	2-DBHMP-2
N2706-LN-04-02	INBH-MNPT	400-11-2	4-2 FH2BZ	4MBC2N	DSC 4-2	4BCM2	774LM-1/4-1/8	CBMC-4-2N	4-DBHMP-2
N2706-LN-04-04	INBH-MNPT	400-11-4	4-4 FH2BZ	4MBC4N	DSC 4-4	4BCM4	774LM-1/4-1/4	CBMC-4-4N	4-DBHMP-4
N2706-LN-06-04	INBH-MNPT	600-11-4	6-4 FH2BZ	6MBC4N	DSC 6-4	6BCM4	774LM-3/8-1/4	CBMC-6-4N	6-DBHMP-4
N2706-LN-06-06	INBH-MNPT	600-11-6	6-6 FH2BZ	6MBC6N	DSC 6-6	6BCM6	774LM-3/8-3/8	CBMC-6-6N	6-DBHMP-6
N2706-LN-06-08	INBH-MNPT	600-11-8	6-8 FH2BZ	6MBC8N	DSC 6-8	6BCM8	774LM-3/8-1/2	CBMC-6-8N	6-DBHMP-8
N2706-LN-08-06	INBH-MNPT	810-11-6	8-6 FH2BZ	8MBC6N	DSC 8-6	8BCM6	774LM-1/2-3/8	CBMC-8-6N	8-DBHMP-6
N2706-LN-08-08	INBH-MNPT	810-11-8	8-8 FH2BZ	8MBC8N	DSC 8-8	8BCM8	774LM-1/2-1/2	CBMC-8-8N	8-DBHMP-8
N2706-LN-12-12	INBH-MNPT	1210-11-12	12-12 FH2BZ	12MBC12N	DSC 12-12	12BCM12	774LM-3/4-3/4	CBFC-12-12N	12-DBHMP-12
N2706-LN-16-16	INBH-MNPT	1610-11-16	16-16 FH2BZ	16MBC16N	DSC 16-16	16BCM16	774LM-1-1	CBMC-16-16N	16-DBHMP-16
N2706-LN-20-20	INBH-MNPT	2000-11-20	20-20 FH2BZ	20MBC20N	DSC 20-20	20BCM20	774LM-1/4-1/14	CBMC-20-20N	20-DBHMP-20
N2706-LN-24-24	INBH-MNPT	2400-11-24	24-24 FH2BZ	24MBC24N	DSC 24-24	24BCM24	774LM-1/2-1/12	CBMC-24-24N	24-DBHMP-24
N2707-LN-04-04	INBH-MJ	400-61-4AN	4-4 XH2BZ	4XABC4	DUE 4-4	4BUAN4	774FL-1/4-1/4	CBFU-4-4	4-DBUANF-4
N2707-LN-06-06	INBH-MJ	600-61-6AN	6-6 XH2BZ	6XABC6	DUE 6-6	6BUAN6	774FL-3/8-3/8	CBFU-6-6	6-DBUANF-6
N2707-LN-08-08	INBH-MJ	810-61-8AN	8-8 XH2BZ	8XABC8	DUE 8-8	8BUAN8	774FL-1/2-1/2	CBFU-8-8	8-DBUANF-8

B R E N N A N I N D U S T R I E S

Atlanta • Cleveland • Dallas • Los Angeles • Seattle • Shanghai • Toronto

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N2707-LN-12-12	INBH-MJ	1210-61-12AN	12-12 XH2BZ	12XABC12	DUE 12-12	12BUAN12	774FL-3/4-3/4	CBFU-12-12	12-DBUANF-12
N2707-LN-16-16	INBH-MJ	1610-61-16AN	16-16 XH2BZ	16XABC16	DUE 16-16	16BUAN16	774FL-1-1	CBFU-16-16	16-DBUANF-16
N2709-LN-02-02	INBH-STDPipe	200-R1-2	2-2 T2H2BZ	2TUBC2	DSE 2	2BA2	774LT-1/8-1/8	CBR-2-2	N/A#
N2709-LN-04-04	INBH-STDPipe	400-R1-4	4-4 T2H2BZ	4TUBC4	DSE 4	4BA4	774LT-1/4-1/4	CBR-4-4	N/A#
N2709-LN-06-06	INBH-STDPipe	600-R1-6	6-6 T2H2BZ	6TUBC6	DSE 6	6BA6	774LT-3/8-3/8	CBR-6-6	N/A#
N2709-LN-08-08	INBH-STDPipe	810-R1-8	8-8 T2H2BZ	8TUBC8	DSE 8	8BA8	774LT-1/2-1/2	CBR-8-8	N/A#
N2709-LN-10-10	INBH-STDPipe	1010-R-10	10-10 T2H2BZ	10TUBC10	DSE 10	10BA10	774LT-5/8-5/8	CBR-10-10	N/A#
N2709-LN-16-16	INBH-STDPipe	1610-R1-16	16-16 T2H2BZ	16TUBC16	DSE 16	16BA16	774LT-1-1	CBR-16-16	N/A#
N2709-LN-20-20	INBH-STDPipe	2000-R1-20	20-20 T2H2BZ	20TUBC20	DSE 20	20BA20	774LT-1 1/4-1 1/4	CBR-20-20	N/A#
N2709-LN-24-24	INBH-STDPipe	2400-R1-24	24-24 T2H2BZ	24TUBC24	DSE 24	24BA24	774LT-11/2-1 1/2	CBR-24-24	N/A#
N6400-02-02	IN-MORB	200-1-2ST	2-2 ZHBA	2M1SC2	DCU 2-2	2UAN02	768LOB-1/8-1/8	CSC-2-2U	2-DMC-0RS
N6400-02-04	IN-MORB	200-1-4ST	2-4 ZHBA	2M1SC4	DCU 2-4	2UAN04	768LOB-1/8-1/4	CSC-2-4U	2-DMC-4
N6400-04-04	IN-MORB	400-1-4ST	4-4 ZHBA	4M1SC4	DCU 4-4	4UAN04	768LOB-1/4-1/4	CSC-4-4U	4-DMC-0RS
N6400-04-06	IN-MORB	400-1-6ST	4-6 ZHBA	4M1SC6	DCU 4-6	4UAN06	768LOB-1/4-3/8	CSC-4-6U	4-DMC-6-0RS
N6400-04-08	IN-MORB	400-1-8ST	4-8 ZHBA	4M1SC8	DCU 4-8	4UAN08	768LOB-1/4-1/2	CSC-4-8U	4-DMC-8-0RS
N6400-05-05	IN-MORB	500-1-5ST	5-5 ZHBA	5M1SC5	DCU 5-5	5UAN05	768LOB-5/16-5/16	CSC-5-5U	5-DMC-0RS
N6400-06-04	IN-MORB	600-1-4ST	6-4 ZHBA	6M0SC4	DCU 6-4	6UAN04	768LOB-3/8-1/4	CSC-6-4U	6-DMC-04-0RS
N6400-06-06	IN-MORB	600-1-6ST	6-6 ZHBA	6M1SC6	DCU 6-6	6UAN06	768LOB-3/8-3/8	CSC-6-6U	6-DMC-0RS
N6400-06-08	IN-MORB	600-1-8ST	6-8 ZHBA	6M1SC8	DCU 6-8	6UAN08	768LOB-3/8-1/2	CSC-6-8U	6-DMC-8-0RS
N6400-06-10	IN-MORB	600-1-10ST	6-10 ZHBA	6M1SC10	DCU 6-10	6UAN010	768LOB-3/8-5/8	CSC-6-10U	6-DMC-10-0RS
N6400-08-06	IN-MORB	810-1-6ST	8-6 ZHBA	8M1SC6	DCU 8-6	8UAN06	768LOB-1/2-3/8	CSC-8-6U	8-DMC-6-0RS
N6400-08-08	IN-MORB	810-1-8ST	8-8 ZHBA	8M1SC8	DCU 8-8	8UAN08	768LOB-1/2-1/2	CSC-8-8U	8-DMC-0RS
N6400-08-10	IN-MORB	810-1-10ST	8-10 ZHBA	8M1SC10	DCU 8-10	8UAN010	768LOB-1/2-5/8	CSC-8-10U	8-DMC-10-0RS
N6400-10-10	IN-MORB	1010-1-10ST	10-10 ZHBA	10M1SC10	DCU 10-10	10UAN010	768LOB-5/8-5/8	CSC-10-10U	10-DMC-0RS
N6400-12-08	IN-MORB	1210-1-8ST	12-8 ZHBA	12M1SC8	DCU 12-8	12UAN08	768LOB-3/4-1/2	CSC-12-8U	12-DMC-8-0RS
N6400-12-12	IN-MORB	1210-1-12ST	12-12 ZHBA	12M1SC12	DCU 12-12	12UAN012	768LOB-3/4-3/4	CSC-12-12U	12-DMC-0RS
N6400-12-16	IN-MORB	1210-1-16ST	12-16 ZHBA	12M1SC16	DCU 12-16 S	12UAN016	768LOB-3/4-1	CSC-12-16U	12-DMC-16-0RS
N6400-16-12	IN-MORB	1610-1-12ST	16-12 ZHBA	16M1SC12	DCU 16-12	16UAN012	768LOB-1-3/4	CSC-16-12U	16-DMC-12-0RS
N6400-16-16	IN-MORB	1610-1-16ST	16-16 ZHBA	16M1SC16	DCU 16-16	16UAN016	768LOB-1-1	CSC-16-16U	16-DMC-16-0RS
N6400-20-20	IN-MORB	2000-1-20ST	20-20 ZHBA	20M1SC20	DCU 20-20	20UAN020	768LOB-11/4-11/4	CSC-20-20U	20-DMC-20-0RS
N6400-24-24	IN-MORB	2400-1-24ST	24-24 ZHBA	24M1SC24	DCU 24-24	24UAN024	768LOB-11/2-11/2	CSC-24-24U	24-DMC-24-0RS
N6801-04-04-NWO	IN-MAORB 90	400-2-4ST	4-4 C5BZ	4M5SEL4	N/A#	N/A#	N/A#	CSLA-4-4U	N/A#
N6801-04-06-NWO	IN-MAORB 90	400-2-6ST	4-6 C5BZ	4M5SEL6	N/A#	N/A#	N/A#	CSLA-4-6U	N/A#
N6801-06-04-NWO	IN-MAORB 90	600-2-4ST	6-4 C5BZ	6M5SEL4	N/A#	N/A#	N/A#	CSLA-6-4U	N/A#
N6801-06-06-NWO	IN-MAORB 90	600-2-6ST	6-6 C5BZ	6M5SEL6	N/A#	N/A#	N/A#	CSLA-6-6U	N/A#
N6801-08-08-NWO	IN-MAORB 90	600-2-8ST	6-8 C5BZ	6M5SEL8	N/A#	N/A#	N/A#	CSLA-6-8U	N/A#
N6801-10-10-NWO	IN-MAORB 90	1010-2-10ST	10-10 C5BZ	10M5SEL10	N/A#	N/A#	N/A#	CSLA-10-10U	N/A#
N6801-12-12-NWO	IN-MAORB 90	1210-2-12ST	12-12 C5BZ	12M5SEL12	N/A#	N/A#	N/A#	CSLA-12-12U	N/A#
N6801-14-14-NWO	IN-MAORB 90	1410-2-14ST	14-14 C5BZ	14M5SEL14	N/A#	N/A#	N/A#	CSLA-14-14U	N/A#
N6801-16-16-NWO	IN-MAORB 90	1610-2-16ST	16-16 C5BZ	16M5SEL16	N/A#	N/A#	N/A#	CSLA-16-16U	N/A#
N6801-20-20-NWO	IN-MAORB 90	2000-2-20ST	20-20 C5BZ	20M5SEL20	N/A#	N/A#	N/A#	CSLA-20-20U	N/A#
N6801-24-24-NWO	IN-MAORB 90	2400-2-24ST	24-24 C5BZ	24M5EL24	N/A#	N/A#	N/A#	CSLA-24-24U	N/A#
N6802-04-04-NWO	IN-MAORB-45	400-5-4ST	4-4 V5BZ	4M5VEL4	N/A#	N/A#	N/A#	CSLB-4-4U	N/A#
N6802-06-06-NWO	IN-MAORB-45	600-5-6ST	6-6 V5BZ	6M5VEL6	N/A#	N/A#	N/A#	CSLB-6-6U	N/A#
N6802-08-08-NWO	IN-MAORB-45	810-5-8ST	8-8 V5BZ	8M5VEL8	N/A#	N/A#	N/A#	CSLB-8-8U	N/A#
N6802-12-12-NWO	IN-MAORB-45	1210-5-12ST	12-12 V5BZ	12M5VEL12	N/A#	N/A#	N/A#	CSLB-12-12U	N/A#
N6802-16-16-NWO	IN-MAORB-45	1610-5-16ST	16-16 V5BZ	16M5VEL16	N/A#	N/A#	N/A#	CSLB-16-16U	N/A#
N6803-04-04-04-NWO	IN-IN-MAORB	400-3-3TS	4-4 S5BZ	4M5BT4	N/A#	N/A#	N/A#	CSBT-4-4U	N/A#
N6803-06-06-NWO	IN-IN-MAORB	600-3-3TS	6-6 S5BZ	6M5BT6	N/A#	N/A#	N/A#	CSBT-6-6U	N/A#
N6803-08-08-NWO	IN-IN-MAORB	810-3-3TS	8-8 S5BZ	8M5BT8	N/A#	N/A#	N/A#	CSBT-8-8U	N/A#
N6803-12-12-12-NWO	IN-IN-MAORB	1210-3-3TS	12-12 S5BZ	12M5BT12	N/A#	N/A#	N/A#	CSBT-12-12U	N/A#
N6803-16-16-16-NWO	IN-IN-MAORB	1610-3-3TS	16-16 S5BZ	16M5BT16	N/A#	N/A#	N/A#	CSBT-16-16U	N/A#
N6803-20-20-NWO	IN-IN-MAORB	2000-3-3TS	20-20 S5BZ	20M5BT20	N/A#	N/A#	N/A#	CSBT-20-20U	N/A#
N6803-24-24-NWO	IN-IN-MAORB	2400-3-3TS	24-24 S5BZ	24M5BT24	N/A#	N/A#	N/A#	CSBT-24-24U	N/A#
N6804-04-04-04-NWO	IN-MAORB-IN	400-3-TST	4-4-4 R5BZ	4M5RT4	N/A#	N/A#	N/A#	CSRT-4-4U	N/A#
N6804-06-06-06-NWO	IN-MAORB-IN	600-3-TST	6-6-6 R5BZ	6M5RT6	N/A#	N/A#	N/A#	CSRT-6-6U	N/A#
N6804-08-08-08-NWO	IN-MAORB-IN	810-3-TST	8-8-8 R5BZ	8M5RT8	N/A#	N/A#	N/A#	CSRT-8-8U	N/A#
N6804-12-12-12-NWO	IN-MAORB-IN	1210-3-TST	12-12-12 R5BZ	12M5RT12	N/A#	N/A#	N/A#	CSRT-12-12U	N/A#
N6804-16-16-16-NWO	IN-MAORB-IN	1610-3-TST	16-16-16 R5BZ	16M5RT16	N/A#	N/A#	N/A#	CSRT-16-16U	N/A#
N6804-20-20-20-NWO	IN-MAORB-IN	2000-3-TST	20-20-20 R5BZ	20M5RT20	N/A#	N/A#	N/A#	CSRT-20-20U	N/A#
N6804-24-24-24-NWO	IN-MAORB-IN	2400-3-TST	24-24-24 R5BZ	24M5RT24	N/A#	N/A#	N/A#	CSRT-24-24U	N/A#
N7000-02-02	IN-MBSPT	200-1-2RT	2-2 FBZ	2MSC2K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-02-04	IN-MBSPT	200-1-4RT	2-4 FBZ	2MSC4K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-04-02	IN-MBSPT	400-1-2RT	4-2 FBZ	4MSC2K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-04-04	IN-MBSPT	400-1-4RT	4-4 FBZ	4MSC4K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-04-06	IN-MBSPT	400-1-6RT	4-6 FBZ	4MSC6K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-04-08	IN-MBSPT	400-1-8RT	4-8 FBZ	4MSC8K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-05-02	IN-MBSPT	500-1-2RT	5-2 FBZ	5MSC2K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-05-04	IN-MBSPT	500-1-4RT	5-4 FBZ	5MSC4K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-06-02	IN-MBSPT	600-1-2RT	6-2 FBZ	6MSC2K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-06-04	IN-MBSPT	600-1-4RT	6-4 FBZ	6MSC4K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-06-06	IN-MBSPT	600-1-6RT	6-6 FBZ	6MSC6K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-06-08	IN-MBSPT	600-1-8RT	6-8 FBZ	6MSC8K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-08-04	IN-MBSPT	810-1-4RT	8-4 FBZ	8MSC4K	N/A#	N/A#	N/A#	N/A#	N/A#

# Cross Reference Chart

Brennan No.	Description	Swagelok	Parker CPI	Parker A-LOK	BI-LOK	GYROLOK	LET-LOK	Hy-Lok	TYLOK CBC-LOK
N7000-08-06	IN-MBSP7	810-1-6RT	8-6K FBZ	8MSC6K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-08-08	IN-MBSP7	810-1-8RT	8-8K FBZ	8MSC8K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-12-12	IN-MBSP7	1210-1-12RT	12-12K FBZ	12MSC12K	N/A#	N/A#	N/A#	N/A#	N/A#
N7000-16-16	IN-MBSP7	1610-1-16RT	16-16K FBZ	16MSC16K	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-02-02	IN-MBSPP	200-1-2RS	2-2R FBZ	2MSC2R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-02-04	IN-MBSPP	200-1-4RS	2-4R FBZ	2MSC4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-04-02	IN-MBSPP	400-1-2RS	4-2R FBZ	4MSC2R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-04-04	IN-MBSPP	400-1-4RS	4-4R FBZ	4MSC4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-04-06	IN-MBSPP	400-1-6RS	4-6R FBZ	4MSC6R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-04-08	IN-MBSPP	400-1-8RS	4-8R FBZ	4MSC8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-06-02	IN-MBSPP	600-1-2RS	6-2R FBZ	6MSC2R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-06-04	IN-MBSPP	600-1-4RS	6-4R FBZ	6MSC4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-06-06	IN-MBSPP	600-1-6RS	6-6R FBZ	6MSC6R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-06-08	IN-MBSPP	600-1-8RS	6-8R FBZ	6MSC8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-08-04	IN-MBSPP	810-1-4RS	8-4R FBZ	8MSC4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-08-06	IN-MBSPP	810-1-6RS	8-6R FBZ	8MSC6R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-08-08	IN-MBSPP	810-1-8RS	8-8R FBZ	8MSC8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-12-08	IN-MBSPP	1210-1-8RS	12-8R FBZ	12MSC8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-12-12	IN-MBSPP	1210-1-12RS	12-12R FBZ	12MSC12R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-16-08	IN-MBSPP	1610-1-8RS	16-8R FBZ	16MSC8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-16-12	IN-MBSPP	1610-1-12RS	16-12R FBZ	16MSC12R	N/A#	N/A#	N/A#	N/A#	N/A#
N7002-16-16	IN-MBSPP	1610-1-16RS	16-16R FBZ	16MSC16R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-04-02	IN-MBSPP 90	400-2-2PR	4-2R C5BZ	4MSEL2R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-04-04	IN-MBSPP 90	400-2-4PR	4-4R C5BZ	4MSEL4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-06-04	IN-MBSPP 90	600-2-4PR	6-4R C5BZ	6MSEL4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-06-06	IN-MBSPP 90	600-2-6PR	6-6R C5BZ	6MSEL6R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-08-04	IN-MBSPP 90	810-2-4PR	8-4R C5BZ	8MSEL4R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-08-06	IN-MBSPP 90	810-2-6PR	8-6R C5BZ	8MSEL6R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-08-08	IN-MBSPP 90	810-2-8PR	8-8R C5BZ	8MSEL8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-10-08	IN-MBSPP 90	1010-2-8PR	10-8R C5BZ	10MSEL8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-12-08	IN-MBSPP 90	1210-2-8PR	12-8R C5BZ	12MSEL8R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-12-12	IN-MBSPP 90	1210-2-12PR	12-12R C5BZ	12MSEL12R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-16-12	IN-MBSPP 90	1610-2-12PR	16-12R C5BZ	16MSEL12R	N/A#	N/A#	N/A#	N/A#	N/A#
N7202-16-16	IN-MBSPP 90	1610-2-16PR	16-16R C5BZ	16MSEL16R	N/A#	N/A#	N/A#	N/A#	N/A#

## GAP INSPECTION GAGES

NGG-04	1/4" GAP GAGE	MS-IG-400							
NGG-05	5/16" GAP GAGE	MS-IG-500							
NGG-06	3/8" GAP GAGE	MS-IG-300							
NGG-08	1/2" GAP GAGE	MS-IG-810							
NGG-10	5/8" GAP GAGE	MS-IG-1010							
NGG-12	3/4" GAP GAGE	MS-IG-1210							
NGG-16	1" GAP GAGE	MS-IG-1610							
NGG-20	1 1/4" GAP GAGE	N/A#							
NGG-24	1 1/2" GAP GAGE	N/A#							

## PRE-SET TOOLS

NPST-04	1/4" OD PRE-SET TOOL	MS-ST-400							
NPST-06	3/8" OD PRE-SET TOOL	MS-ST-600							
NPST-08	1/2" OD PRE-SET TOOL	MS-ST-810							
NPST-10	5/8" OD PRE-SET TOOL	MS-ST-1010							
NPST-12	3/4" OD PRE-SET TOOL	MS-ST-1210							
NPST-14	7/8" OD PRE-SET TOOL	MS-ST-1410							
NPST-16	1" OD PRE-SET TOOL	MS-ST-1610							

**DISTRIBUTION CENTERS****California**

Barrents Sea Circle  
Lake Forest, California 92630-8807  
Phone: 949.595.0901  
Fax: 949.595.0933  
Toll Free: 1.800.942.5321

**Georgia**

5369 Penn Circle  
Decatur, Georgia 30035  
Phone: 770.981.8451  
Fax: 770.987.0926  
Toll Free: 1.800.458.1988

**Ohio**

30205 Solon Road  
Solon, Ohio 44139  
Phone: 440.248.7088  
Fax: 440.248.9375  
Toll Free: 1.800.331.1523

**Texas**

1189 108th Street  
Grand Prairie, Texas 75050  
Phone: 972.988.8311  
Fax: 972.660.6638  
Toll Free: 1.800.443.9937

**Washington**

1516 45th Street E.  
Sumner, Washington 98390  
Phone: 253.826.2001  
Fax: 253.826.4884  
Toll Free: 1.800.445.7107

**Shanghai, China**

No. 368, Rongchun Road  
Langxia Town  
Jinshan District  
Shanghai 201516  
Phone: 86.21.57391155  
Fax: 86.21.57390688

**Ontario, Canada**

3397 American Drive  
Mississauga, Ontario  
L4V 1T8  
Phone: 800.331.1523

[www.brennaninc.com](http://www.brennaninc.com)[Tube Fittings & Adapters](#)[O-Ring Face Seal Fittings](#)[Instrumentation Fittings](#)[Valves-Instrumentation](#)[Hydraulic Flanges](#)[Metric Bite Type Fittings](#)[Push-to-Connect Fittings](#)[DOT](#)[Clamps](#)[Flareless Bite Type Fittings](#)[Live Swivels](#)[Brass Fittings](#)[Test Points](#)[Conversion Adapters](#)[Flare-O](#)*Distributed By:***Corporate Headquarters**

6701 Cochran Road  
Solon, Ohio 44139 U.S.A.  
Phone: 440.248.1880  
Toll Free: 888.331.1523  
Fax: 440.248.7282

**Brennan Manufacturing Group**

26420 Century  
Corners Parkway  
Cleveland, Ohio 44132-3310